


Plug - Part no. 677A



- screw terminals
- with cable gland

Protection type IP 44
 Ampere 32 A
 Poles 3 p
 Voltage 20-25, 40-50 V
 Hertz 100-200 Hz
 Earth position 4 h
 Contact standard
 Connection technology Screw terminals

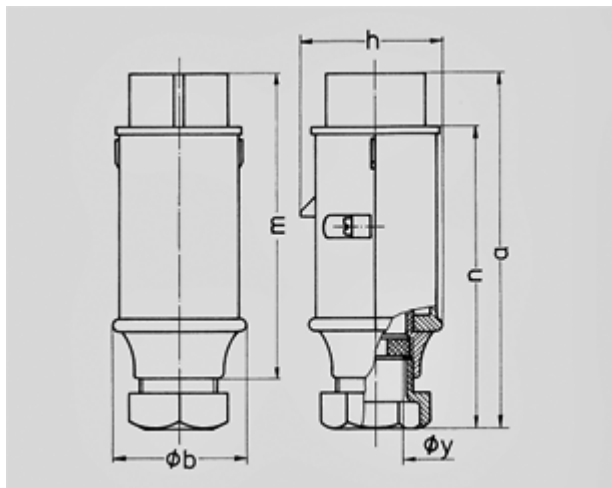

Drawing	Amp. Poles	16		32	
		2	3	2	3
Dim. in mm	a	150	150	150	150
	b	55	55	55	55
	h	58	58	58	58
	m	128	128	128	128
	n	130	130	130	130
	y	24,7	24,7	24,7	24,7
Terminal for cond. cross		4	4	4	4
section (mm ²) min.-max.		—10	—10	—10	—10