


Wall mounted socket - Part no. 5691A



- screw terminals
- X-CONTACT
- switched
- mechanical DUO-interlock
- upon request with provision for an additional padlock

Protection type	IP 67
Ampere	125 A
Poles	4 p
Voltage	400 V
Hertz	50-60 Hz
Earth position	6 h
Contact	standard
Connection technology	Screw terminals, X-CONTACT

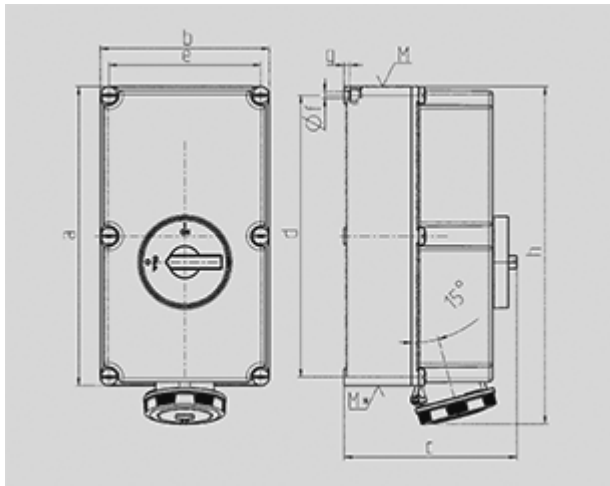

Drawing	Amp.	125		
		3	4	5
1 MB 177	Poles			
Dim. in mm	a	460	460	460
	b	260	260	260
	c	270	270	270
	d	434	434	434
	e	234	234	234
	f	11	11	11
	g	9	9	9
	h	519	519	519
	M	63	63	63
	M*	2x63	2x63	2x63
	Max. cable diam. (mm)	44	44	44
Terminal for cond. cross section (mm ²) min.-max.		25	25	25
		—70	—70	—70