



JCUK Terminal Blocks

1. General

JCUK series is applicable to circuit as wire connection with rated voltage not more than 690 V (660V) and rated cross-sectional area of 150mm². Standard: GB/T 14048.7 IEC 60947-7-1

JCUK-2.5N



JCUK-35N



JCUK-50H



JCUK-150H



JCUK-95H



JCUK-5N



JCUK-6N



JCUK-10RD



JCUK-3N



JCUK/DK4



JCUK-5RD



JCUK/K5



JCUK-5JD



JCUK-10JD



JCUK-16JD



JCUK-35JD



JCUK/S



JCUK-10N




JCUK-16N



Terminal Blocks

2. Overall and mounting dimensions

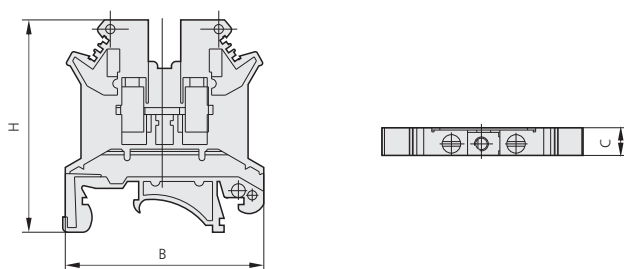

NO.	Product type	Boundary dimension(mm)			Type of mounting rail	Remark
		B	C	H		
1	JCUK-2.5N	42.8	6.2	40.8	TH35/G32	
2	JCUK-3N	42.8	5.3	46.4	TH35/G32	
3	JCUK-5N	42.9	6.2	45.8	TH35/G32	
4	JCUK-6N	42.9	8.2	46.4	TH35/G32	
5	JCUK-10N	42.5	9.8	47	TH35/G32	
6	JCUK-16N	42.9	12.2	50.7	TH35/G32	
7	JCUK-35N	50.3	15	61	TH35/G32	
8	JCUK-50H	72.5	21.6	77	TH35/G32	
9	JCUK-95H	84.5	26	91.5	TH35/G32	
10	JCUK-150H	101	31	112	TH35/G32	
11	JCUK/S	72.9	8.2	50.7	TH35/G32	
12	JCUK/K5	56	8.5	61	TH35/G32	
13	JCUK/DK4	63.5	6.2	46.3	TH35/G32	
14	JCUK-5JD	42.9	6.4	46	TH35/G32	
15	JCUK-10JD	42.8	10.4	45.3	TH35/G32	
16	JCUK-16JD	42.5	12.2	52.6	TH35/G32	
17	JCUK-35JD	50.6	15.4	61.3	TH35/G32	
18	JCUK-5RD	73	8.5	56.5	TH35/G32	Equipped with 5 X 25 fuse
19	JCUK-10RD	62.7	12.7	46.5	TH35/G32	Equipped with 5 X 20 fuse
20	E/UK(fastener)				TH35/G32	
21	JCUK-BJ(marked number)	1~10				
22	D/UK4/10(3N-16N baffle plate, JUCK-2.5N baffle plate)					

3. Ordering information

3.1 When ordering, you shall indicate product type, wiring area or current, category, and quantity;

3.2 Conventional terminal block consists of 10 pieces to a line.

3.3 Other special requirements shall be indicated.

3.4 Ordering example: JCUK-2.5N/10 5 pieces

Mean: Product number: JCUK, wiring area: 2.5mm², category: general type and total quantity: 5