


Panel mounted socket - Part no. 1473



- screw terminals
- suitable for through wiring
- 20° inclination

Protection type	IP 44
Ampere	16 A
Poles	5 p
Voltage	400 V
Hertz	50-60 Hz
Earth position	6 h
Contact	standard
Connection technology	Screw terminals

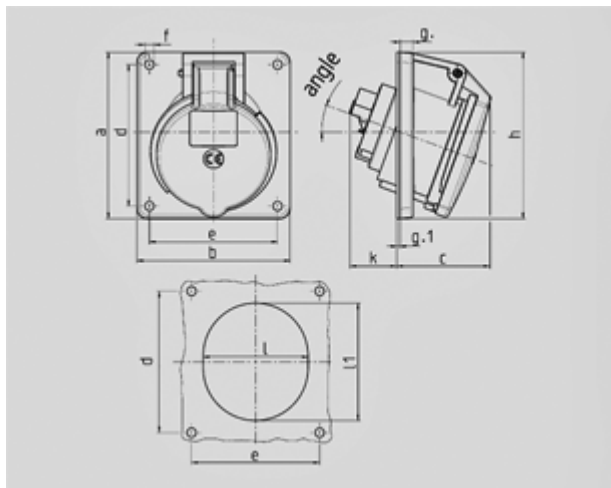

Drawing		16			32		
1 MB 260		3			4		
Dim. in mm		3			4		
a	73.5	100	100	100	100	100	100
b	64	92	92	92	92	92	92
c	50	59	58	62	62	61	61
d	60	85	85	85	85	85	85
e	52	77	77	77	77	77	77
f	5.5	5.5	5.5	5.5	5.5	5.5	5.5
g	7	8	8	8	8	8	8
g.1	2	2	2	2	2	2	2
h	79	100	100	103	103	106	106
k	44	34	34	54	54	49	49
l	52	55	65	67	67	72	72
l1	60	63	72	82	82	85	85
α	20°	20°	20°	20°	20°	20°	20°
Terminal for cond. cross section (mm²) min.-max.	1.5	1.5	1.5	2.5	2.5	2.5	2.5
	—4	—4	—4	—10	—10	—10	—10