

CONTENTS

This section contains complete lever/knob mortise lock entry sets and trim only lever/knob mortise lock entry sets. Complete sets include bronze trim, mortise lock, cylinder(s), spindle, fasteners and installation instructions. All complete mortise lock entry set part numbers begin with CS. Trim only sets include bronze trim, spindle, fasteners and installation instructions. No locks or cylinders are included. All trim only mortise lock entry set part numbers begin with TS. Mortise lock entry trim sets can be machined to be compatible with most high quality mortise locks. The lock manufacturer, model number of lock and cylinder type must be specified when ordering trim only sets.

NOTE: UC-F pricing is included in flipped sectional trim.

TABLE OF CONTENTS

Contemporary Keyless Entry Keypad w/Lift Up Cover	Page 6-3
Mortise Cylinder Collars	Pages 6-4 – 6-5
European Profile Cylinder Collars	Page 6-6
Bevel Edge Sectional Lever x Knob Mortise Lock Entry Sets	Pages 6-7 – 6-14
Bevel Edge Lever x Knob Mortise Lock Entry Sets	Pages 6-15 – 6-20
Arch Lever x Knob Mortise Lock Entry Sets	Pages 6-21 – 6-27
Oval Lever x Knob Mortise Lock Entry Sets	Page 6-28
Contemporary Sectional Lever x Knob Mortise Lock Entry Sets	Pages 6-29 – 6-36
Contemporary Lever x Knob Mortise Lock Entry Sets	Pages 6-37 – 6-56
Fleur de Lis Lever x Knob Mortise Lock Entry Sets	Pages 6-57 – 6-58
Ridge Lever x Knob Mortise Lock Entry Sets	Pages 6-59 – 6-65
Corrugated w/Band Lever x Knob Mortise Lock Entry Sets	Page 6-66
Hampton Lever x Knob Mortise Lock Entry Sets	Pages 6-67 – 6-68
Trellis Lever x Knob Mortise Lock Entry Sets	Page 6-69
Deco Lever x Knob Mortise Lock Entry Sets	Page 6-70
Corrugated Lever x Knob Mortise Lock Entry Sets	Pages 6-71 – 6-72


continued on next page

ORDERING INSTRUCTIONS

Complete Sets and Trim Sets: See Ordering Instructions in Binder 1/ Dealer Information.

Custom Sets: See Custom Ordering Instructions in Binder 1/ Dealer Information.

DOOR HANDING GUIDE

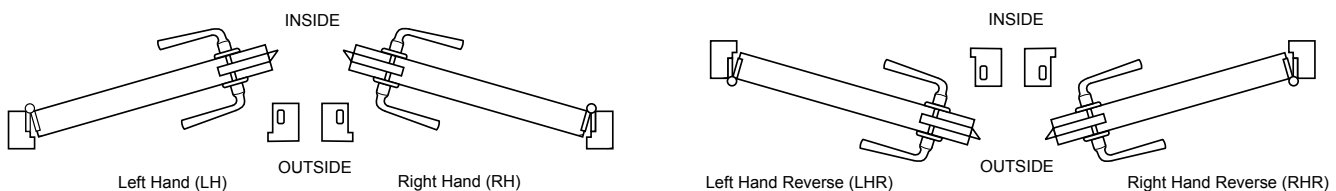


LEVER x KNOB MORTISE LOCK ENTRY SETS

Bandbox Lever x Knob Mortise Lock Entry Sets	Pages 6-73 – 6-76
Corduroy Lever x Knob Mortise Lock Entry Sets	Pages 6-77 – 6-80
Minimalist Lever x Knob Mortise Lock Entry Sets	Refer to Section 34, Pages 34-7 – 34-8
Mesa Lever x Knob Mortise Lock Entry Sets	Pages 6-81 – 6-84
Burlap Lever x Knob Mortise Lock Entry Sets	Pages 6-85 – 6-86
Gem Lever x Knob Mortise Lock Entry Sets	Pages 6-87 – 6-90
Novus Sectional Lever x Knob Mortise Lock Entry Sets	Pages 6-91 – 6-98
Novus Lever x Knob Mortise Lock Entry Sets	Pages 6-99 – 6-110
Ridge Burlap Lever x Knob Mortise Lock Entry Sets	Pages 6-111 – 6-112
Teton Lever x Knob Mortise Lock Entry Sets	Page 6-113
Eased Edge Sectional Lever x Knob Mortise Lock Entry Sets	Pages 6-113 – 6-117
Eased Edge Lever x Knob Mortise Lock Entry Sets	Page 6-118



CONTEMPORARY KEYLESS ENTRY KEYPAD w/LIFT UP COVER

Illustrations are for demonstration purposes only.

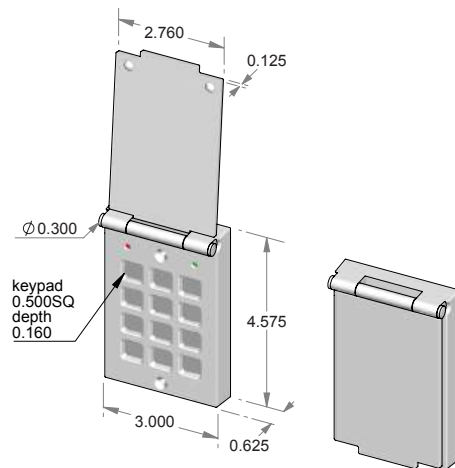

CS-KEKP-900
– Complete keyless entry keypad w/lift up cover.

Complete keyless entry keypad w/lift up cover.

CS-KEKP-900


Keyless entry keypad w/lift up cover. Includes Essex K1-34 x 5v keypad.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




MORTISE CYLINDER COLLARS


Illustrations are for demonstration purposes only. Optional mortise cylinder collars for sectional mortise lock entry sets. Mortise cylinder collars included in sectional mortise lock entry set pricing.




CC-400ML-C Round mortise cylinder collar.

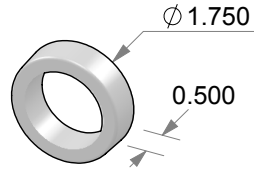


CC-401ML-C Round mortise cylinder collar.



CC-404ML-C Gem mortise cylinder collar.

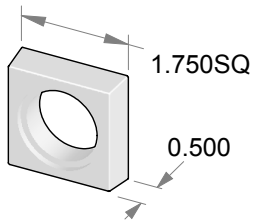

CC-405ML-C Square mortise cylinder collar.

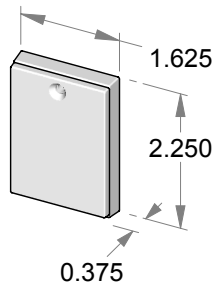

CC-407ML-C Rectangular mortise cylinder collar w/key cover.


SUN VALLEY BRONZE

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




MORTISE CYLINDER COLLARS


Illustrations are for demonstration purposes only. Optional mortise cylinder collars for sectional mortise lock entry sets. Mortise cylinder collars included in sectional mortise lock entry set pricing.




CC-503ML-C Bevel Edge square cylinder trim. No key cover.




CC-504ML-C Bevel Edge round cylinder trim. No key cover.

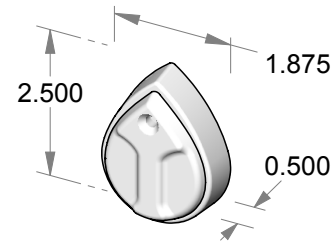


CC-506ML-C Teardrop cylinder trim w/ key cover.




CC-507ML-C Bevel Edge round cylinder trim. No key cover.




CC-509ML-C Bevel Edge cylinder trim w/ key cover.




CC-9503ML-C Contemporary cylinder trim. No key cover.

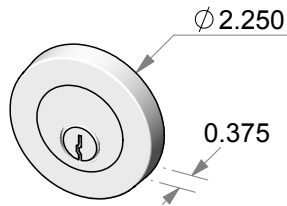


CC-9507ML-C Contemporary round cylinder trim. No key cover.




CC-RB9507/KC-1718 Contemporary round cylinder trim w/ key cover.

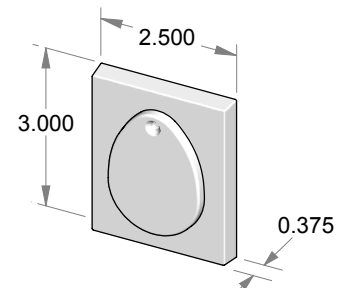


CC-9510ML-C Contemporary cylinder trim w/ key cover.



CC-9512ML-C Contemporary cylinder trim w/ key cover.



CC-E225ML-C Eased Edge square cylinder trim. No key cover.




CC-RP-E225ML-C Eased Edge round cylinder trim. No key cover.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




EUROPEAN PROFILE CYLINDER COLLARS


Illustrations are for demonstration purposes only. Optional mortise cylinder collars for sectional mortise lock entry sets. Mortise cylinder collars included in sectional mortise lock entry set pricing.




503ML-PROFILECYL Bevel Edge square cylinder trim.

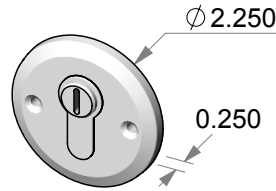


507ML-PROFILECYL Bevel Edge round cylinder trim.



9503ML-PROFILECYL Contemporary square cylinder trim.



9507ML-PROFILECYL Contemporary round cylinder trim.



E225ML-PROFILECYL Eased Edge cylinder trim.


SUN VALLEY BRONZE

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




RP225 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

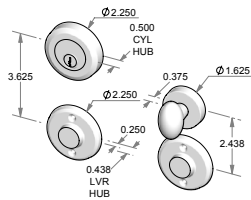


CS-RP225ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
– Shown with 504ML-C.
OR
TS-RP225ML
– Trim set only. No lock.



CS-RP225ML-DC
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Shown with 504ML-C.
OR
TS-RP225ML-DC



CS-RP225ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-RP225ML-PF
– Trim set only. No lock.



TS-RP225ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/504ML-C (ext) RP-225 w/RP-158ML-TPC (int)*
CS-RP225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/504ML-C (ext) RP-225 w/504ML-C (int) Non-egress * **
CS-RP225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-225 (ext) RP-225 w/RP-158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/504ML-C (ext) RP-225 w/RP-158ML-TPC (int)
TS-RP225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/504ML-C (ext) RP-225 w/504ML-C (int)*
TS-RP225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-225 (ext) RP-225 w/RP-158ML-TPC (int)
TS-RP225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-225D (ext) RP-225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP225 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

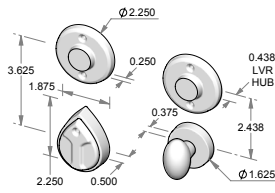


CS-F-RP225ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 506ML-C.
 OR
TS-F-RP225ML
 – Trim set only. No lock.



CS-F-RP225ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 506ML-C.
 – Non-egress.
 OR
TS-F-RP225ML-DC
 – Trim set only. No lock.



CS-F-RP225ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F-RP225ML-PF
 – Trim set only. No lock.



TS-F-RP225ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/506ML-C (ext) RP-225 w/RP-158ML-TPC (int)*
CS-F-RP225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/506ML-C (ext) RP-225 w/506ML-C (int) Non-egress * **
CS-F-RP225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-225 (ext) RP-225 w/RP-158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/506ML-C (ext) RP-225 w/RP-158ML-TPC (int)
TS-F-RP225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-225 w/506ML-C (ext) RP-225 w/506ML-C (int)*
TS-F-RP225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-225 (ext) RP-225 w/RP-158ML-TPC (int)
TS-F-RP225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-225D (ext) RP-225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




RP402 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

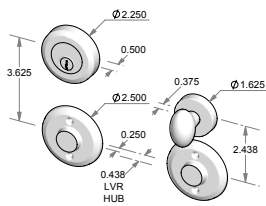


CS-RP402ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with 504ML-C.
 OR
 TS-RP402ML
 - Trim set only. No lock.



CS-RP402ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with 504ML-C.
 - Non-egress.
 OR
 TS-RP402ML-DC
 - Trim set only. No lock.



CS-RP402ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
 TS-RP402ML-PF
 - Trim set only. No lock.



TS-RP402ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP402ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/RP-158ML-TPC (int)*
CS-RP402ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/504ML-C (int) Non-egress * **
CS-RP402ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-402 (ext) RP-402 w/RP-158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP402ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/RP-158ML-TPC (int)
TS-RP402ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/504ML-C (int)*
TS-RP402ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-402 (ext) RP-402 w/RP-158ML-TPC (int)
TS-RP402ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-402D (ext) RP-402D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP402 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

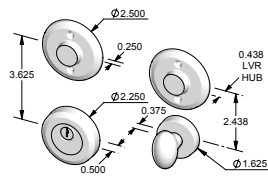


- CS-F-RP402ML**
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with 504ML-C.
 OR
TS-F-RP402ML
 - Trim set only. No lock.



- CS-F-RP402ML-DC**
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with 504ML-C.
 - Non-egress.
 OR
TS-F-RP402ML-DC
 - Trim set only. No lock.



- CS-F-RP402ML-PF**
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-F-RP402ML-PF
 - Trim set only. No lock.



- TS-F-RP402ML-FD**
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP402ML

Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/RP-158ML-TPC (int)*

CS-F-RP402ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/504ML-C (int) Non-egress * **

CS-F-RP402ML-PF

Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-402 (ext) RP-402 w/RP-158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP402ML

Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/RP-158ML-TPC (int)

TS-F-RP402ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-402 w/504ML-C (ext) RP-402 w/504ML-C (int)*

TS-F-RP402ML-PF

Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-402 (ext) RP-402 w/RP-158ML-TPC (int)

TS-F-RP402ML-FD

Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-402D (ext) RP-402D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




225 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

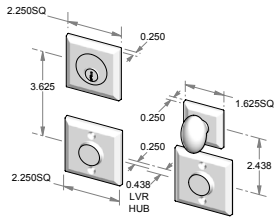


CS-225ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 503ML-C.
 OR
TS-225ML
 – Trim set only. No lock.



CS-225ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 503ML-C.
 – Non-egress.
 OR
TS-225ML-DC
 – Trim set only. No lock.

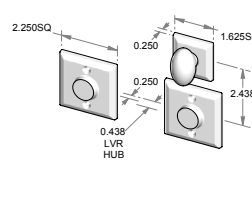

CS-225ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-225ML-PF
 – Trim set only. No lock.



TS-225ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/158ML-TPC (int)*
CS-225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/502ML-C (int) Non-egress * **
CS-225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-225 (ext) P-225 w/158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/158ML-TPC (int)
TS-225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/502ML-C (int)*
TS-225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-225 (ext) P-225 w/158ML-TPC (int)
TS-225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-225D (ext) P-225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F225 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

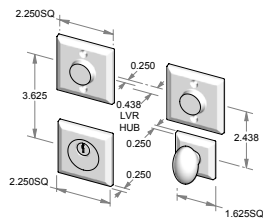


CS-F225ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 503ML-C.
 OR
TS-F225ML
 – Trim set only. No lock.



CS-F225ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 503ML-C.
 – Non-egress.
 OR
TS-F225ML-DC
 – Trim set only. No lock.



CS-F225ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F225ML-PF
 – Trim set only. No lock.



TS-F225ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/158ML-TPC (int)*
CS-F225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/502ML-C (int) Non-egress * **
CS-F225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-225 (ext) P-225 w/158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/158ML-TPC (int)
TS-F225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-225 w/503ML-C (ext) P-225 w/502ML-C (int)*
TS-F225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-225 (ext) P-225 w/158ML-TPC (int)
TS-F225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-225D (ext) P-225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




402 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

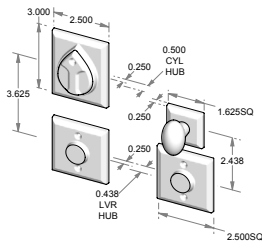


CS-402ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with 509ML-C.
 OR
TS-402ML
 - Trim set only. No lock.



CS-402ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with 509ML-C.
 - Non-egress.
 OR
TS-402ML-DC
 - Trim set only. No lock.



CS-402ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-402ML-PF
 - Trim set only. No lock.



TS-402ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-402ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/158ML-TPC (int)*
CS-402ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/509ML-C (int) Non-egress * **
CS-402ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-402 (ext) P-402 w/158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-402ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/158ML-TPC (int)
TS-402ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/509ML-C (int)*
TS-402ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-402 (ext) P-402 w/158ML-TPC (int)
TS-402ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-402D (ext) P-402D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F402 BEVEL EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

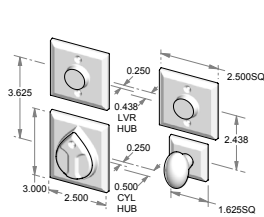


CS-F402ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 509ML-C.
 OR
TS-F402ML
 – Trim set only. No lock.

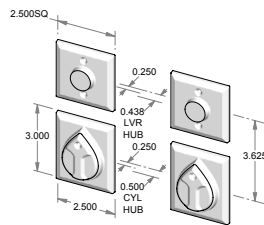

CS-F402ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 509ML-C.
 OR
TS-F402ML-DC
 – Trim set only. No lock.



CS-F402ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F402ML-PF
 – Trim set only. No lock.



TS-F402ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F402ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/158ML-TPC (int)*
CS-F402ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/509ML-C (int) Non-egress * **
CS-F402ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-402 (ext) P-402 w/158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F402ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/158ML-TPC (int)
TS-F402ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-402 w/509ML-C (ext) P-402 w/509ML-C (int)*
TS-F402ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-402 (ext) P-402 w/158ML-TPC (int)
TS-F402ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-402D (ext) P-402D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




407 BEVEL EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

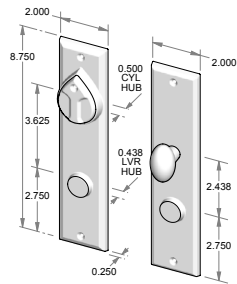


CS-407ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-407ML
 - Trim set only. No lock.

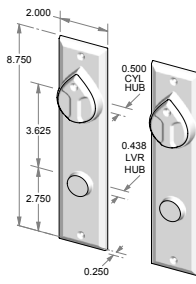

CS-407ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-407ML-DC
 - Trim set only. No lock.

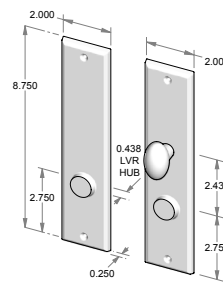

CS-407ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-407ML-PF
 - Trim set only. No lock.

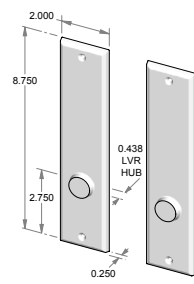

TS-407ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-407ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-407ML-KC (ext) EP-407ML-TPC (int)*
CS-407ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-407ML-KC (ext) EP-407ML-KC (int) Non-egress * **
CS-407ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-407 (ext) EP-407ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-407ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-407ML-KC (ext) EP-407ML-TPC (int)
TS-407ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-407ML-KC (ext) EP-407ML-KC (int)*
TS-407ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-407 (ext) EP-407ML-TPC (int)
TS-407ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-407D (ext) P-407D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




408 BEVEL EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

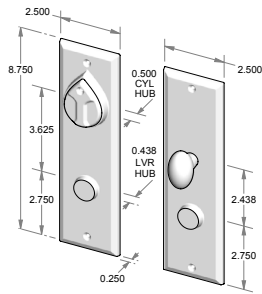


CS-408ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-408ML
 – Trim set only. No lock.



CS-408ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-408ML-DC
 – Trim set only. No lock.

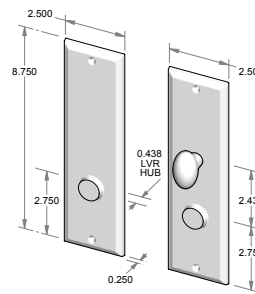

CS-408ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-408ML-PF
 – Trim set only. No lock.

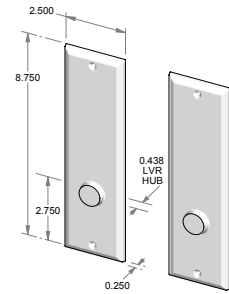

TS-408ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-408ML-KC (ext) EP-408ML-TPC (int)*
CS-408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-408ML-KC (ext) EP-408ML-KC (int) Non-egress * **
CS-408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-408 (ext) EP-408ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-408ML-KC (ext) EP-408ML-TPC (int)
TS-408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-408ML-KC (ext) EP-408ML-KC (int)*
TS-408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-408 (ext) EP-408ML-TPC (int)
TS-408ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-408D (ext) P-408D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




409 BEVEL EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

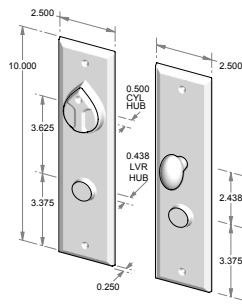


CS-409ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-409ML
 – Trim set only. No lock.

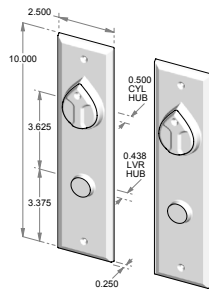

CS-409ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-409ML-DC
 – Trim set only. No lock.

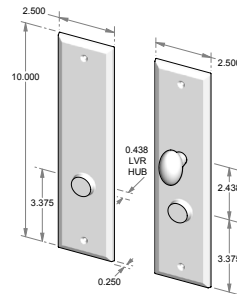

CS-409ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-409ML-PF
 – Trim set only. No lock.

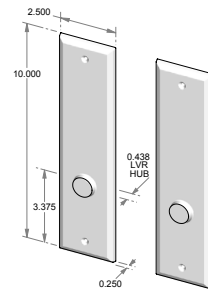

TS-409ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-409ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-409ML-KC (ext) EP-409ML-TPC (int)*
CS-409ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-409ML-KC (ext) EP-409ML-KC (int) Non-egress * **
CS-409ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-409ML (ext) EP-409ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-409ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-409ML-KC (ext) EP-409ML-TPC (int)
TS-409ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-409ML-KC (ext) EP-409ML-KC (int)*
TS-409ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-409ML (ext) EP-409ML-TPC (int)
TS-409ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-409ML-D (ext) P-409ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



410 BEVEL EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

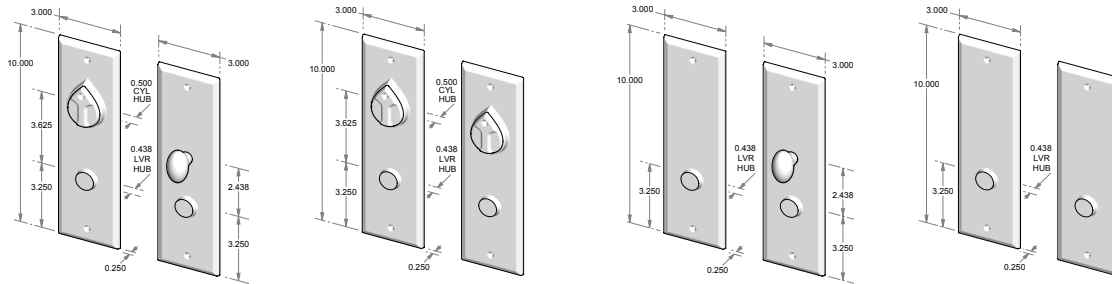

CS-410ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-410ML
 - Trim set only. No lock.

CS-410ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-410ML-DC
 - Trim set only. No lock.

CS-410ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-410ML-PF
 - Trim set only. No lock.

TS-410ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-410ML-KC (ext) EP-410ML-TPC (int)*
CS-410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-410ML-KC (ext) EP-410ML-KC (int) Non-egress * **
CS-410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-410ML (ext) EP-410ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-410ML-KC (ext) EP-410ML-TPC (int)
TS-410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-410ML-KC (ext) EP-410ML-KC (int)*
TS-410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-410ML (ext) EP-410ML-TPC (int)
TS-410ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-410ML-D (ext) P-410ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



601 BEVEL EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

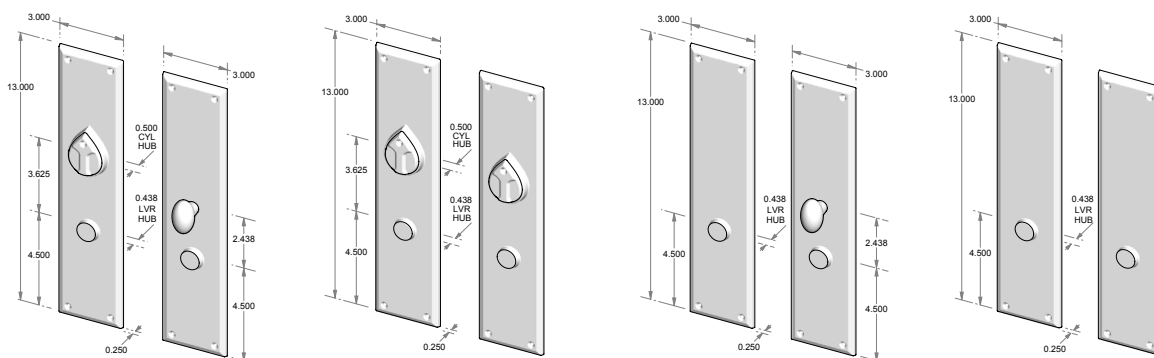

CS-601ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-601ML
 – Trim set only. No lock.

CS-601ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-601ML-DC
 – Trim set only. No lock.

CS-601ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-601ML-PF
 – Trim set only. No lock.

TS-601ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-601ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-601ML-KC (ext) EP-601ML-TPC (int)*
CS-601ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-601ML-KC (ext) EP-601ML-KC (int) Non-egress * **
CS-601ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-601ML (ext) EP-601ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-601ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-601ML-KC (ext) EP-601ML-TPC (int)
TS-601ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-601ML-KC (ext) EP-601ML-KC (int)*
TS-601ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-601ML (ext) EP-601ML-TPC (int)
TS-601ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-601ML-D (ext) P-601ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



602 BEVEL EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

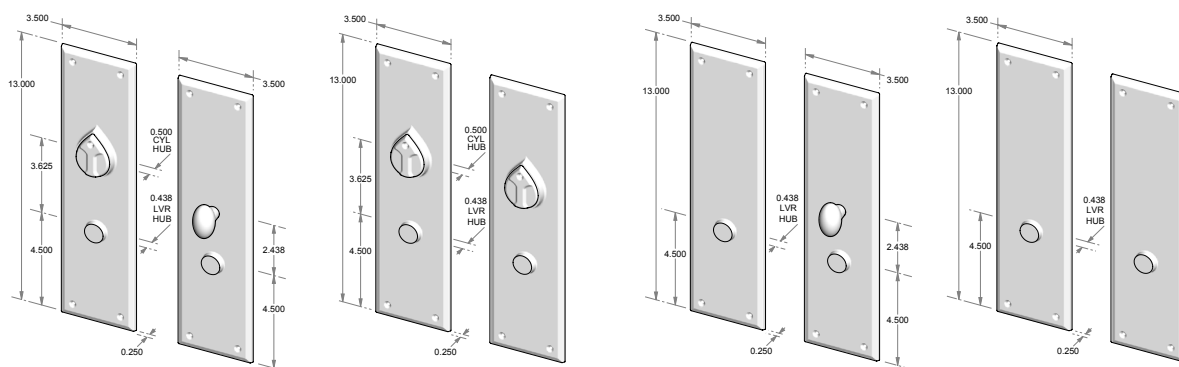

CS-602ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-602ML
 - Trim set only. No lock.

CS-602ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-602ML-DC
 - Trim set only. No lock.

CS-602ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-602ML-PF
 - Trim set only. No lock.

TS-602ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-602ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-602ML-KC (ext) EP-602ML-TPC (int)*
CS-602ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-602ML-KC (ext) EP-602ML-KC (int) Non-egress * **
CS-602ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-602ML (ext) EP-602ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-602ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-602ML-KC (ext) EP-602ML-TPC (int)
TS-602ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-602ML-KC (ext) EP-602ML-KC (int)*
TS-602ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-602ML (ext) EP-602ML-TPC (int)
TS-602ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-602ML-D (ext) P-602ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A406 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

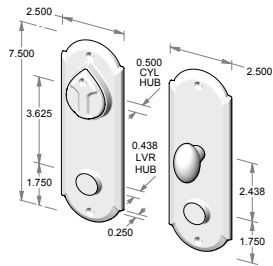


CS-A406ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
 TS-A406ML
 - Trim set only. No lock.



CS-A406ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
 TS-A406ML-DC
 - Trim set only. No lock.

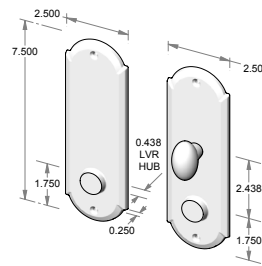

CS-A406ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
 TS-A406ML-PF
 - Trim set only. No lock.

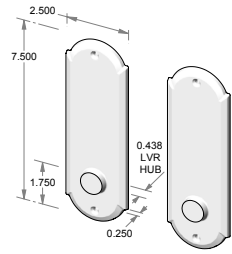

TS-A406ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A406ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A406ML-KC (ext) EP-A406ML-TPC (int)*
CS-A406ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A406ML-KC (ext) EP-A406ML-KC (int) Non-egress * **
CS-A406ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A406ML (ext) EP-A406ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A406ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A406ML-KC (ext) EP-A406ML-TPC (int)
TS-A406ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A406ML-KC (ext) EP-A406ML-KC (int)*
TS-A406ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A406ML (ext) EP-A406ML-TPC (int)
TS-A406ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A406ML-D (ext) P-A406ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A407 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

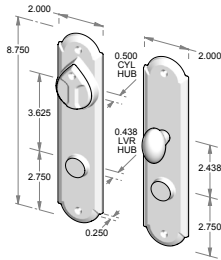


CS-A407ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-A407ML
 - Trim set only. No lock.

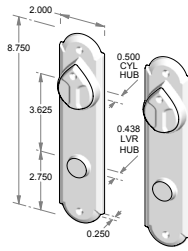

CS-A407ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-A407ML-DC
 - Trim set only. No lock.

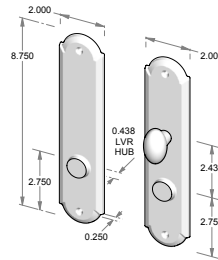

CS-A407ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-A407ML-PF
 - Trim set only. No lock.

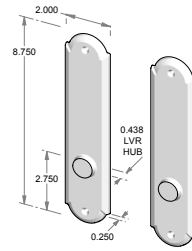

TS-A407ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A407ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A407ML-KC (ext) EP-A407ML-TPC (int)*
CS-A407ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A407ML-KC (ext) EP-A407ML-KC (int) Non-egress * **
CS-A407ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A407ML (ext) EP-A407ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A407ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A407ML-KC (ext) EP-A407ML-TPC (int)
TS-A407ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A407ML-KC (ext) EP-A407ML-KC (int)*
TS-A407ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A407 (ext) EP-A407ML-TPC (int)
TS-A407ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A407D (ext) P-A407D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A408 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

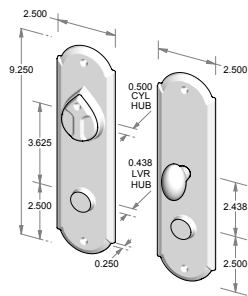


CS-A408ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-A408ML
 - Trim set only. No lock.



CS-A408ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-A408ML-DC
 - Trim set only. No lock.

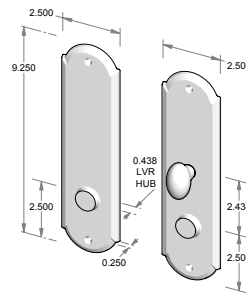

CS-A408ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-A408ML-PF
 - Trim set only. No lock.

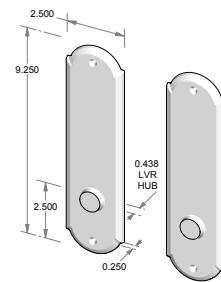

TS-A408ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A408ML-KC (ext) EP-A408ML-TPC (int)*
CS-A408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A408ML-KC (ext) EP-A408ML-KC (int) Non-egress * **
CS-A408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A408 (ext) EP-A408ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A408ML-KC (ext) EP-A408ML-TPC (int)
TS-A408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A408ML-KC (ext) EP-A408ML-KC (int)*
TS-A408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A408 (ext) EP-A408ML-TPC (int)
TS-A408ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A408D (ext) P-A408D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




A409 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-A409ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-A409ML
 – Trim set only. No lock.



CS-A409ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-A409ML-DC
 – Trim set only. No lock.

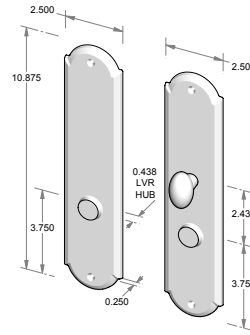

CS-A409ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-A409ML-PF
 – Trim set only. No lock.

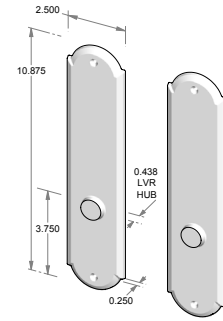

TS-A409ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A409ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A409ML-KC (ext) EP-A409ML-TPC (int)*
CS-A409ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A409ML-KC (ext) EP-A409ML-KC (int) Non-egress * **
CS-A409ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A409ML (ext) EP-A409ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A409ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A409ML-KC (ext) EP-A409ML-TPC (int)
TS-A409ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A409ML-KC (ext) EP-A409ML-KC (int)*
TS-A409ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A409ML (ext) EP-A409ML-TPC (int)
TS-A409ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A409ML-D (ext) P-A409ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




A410 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

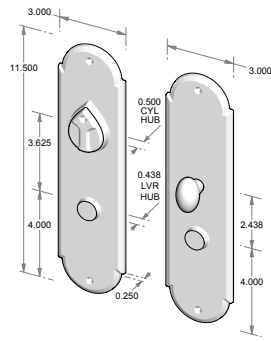


CS-A410ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-A410ML
 - Trim set only. No lock.



CS-A410ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-A410ML-DC
 - Trim set only. No lock.

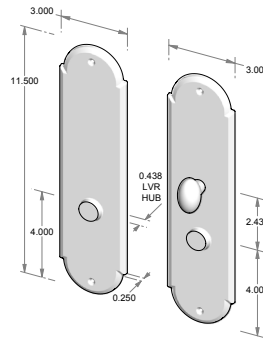

CS-A410ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-A410ML-PF
 - Trim set only. No lock.

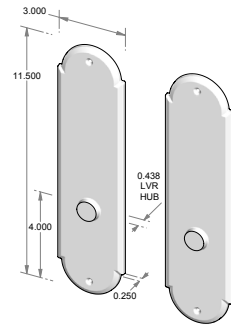

TS-A410ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A410ML-KC (ext) EP-A410ML-TPC (int)*
CS-A410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A410ML-KC (ext) EP-A410ML-KC (int) Non-egress * **
CS-A410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A410ML (ext) EP-A410ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A410ML-KC (ext) EP-A410ML-TPC (int)
TS-A410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A410ML-KC (ext) EP-A410ML-KC (int)*
TS-A410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A410ML (ext) EP-A410ML-TPC (int)
TS-A410ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A410ML-D (ext) P-A410ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A601 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

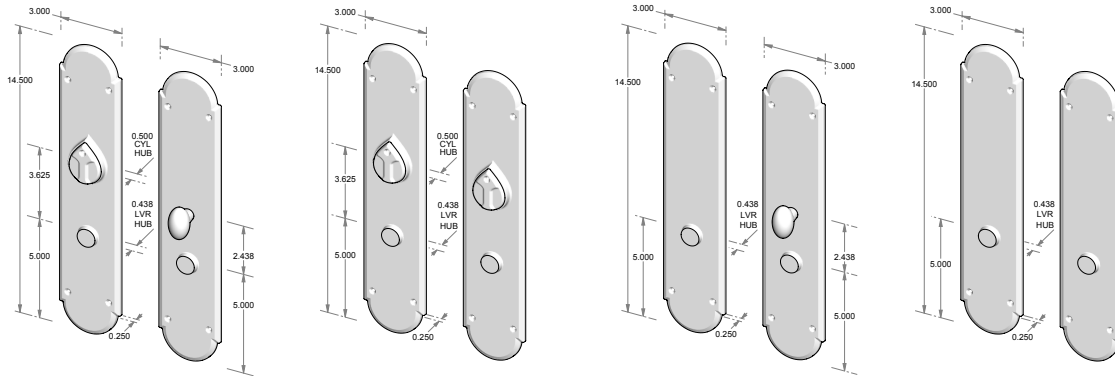

CS-A601ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-A601ML
 - Trim set only. No lock.

CS-A601ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-A601ML-DC
 - Trim set only. No lock.

CS-A601ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-A601ML-PF
 - Trim set only. No lock.

TS-A601ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A601ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A601ML-KC (ext) EP-A601ML-TPC (int)*
CS-A601ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A601ML-KC (ext) EP-A601ML-KC (int) Non-egress * **
CS-A601ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A601ML (ext) EP-A601ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A601ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A601ML-KC (ext) EP-A601ML-TPC (int)
TS-A601ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A601ML-KC (ext) EP-A601ML-KC (int)*
TS-A601ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A601ML (ext) EP-A601ML-TPC (int)
TS-A601ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A601ML-D (ext) P-A601ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A602 ARCH LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

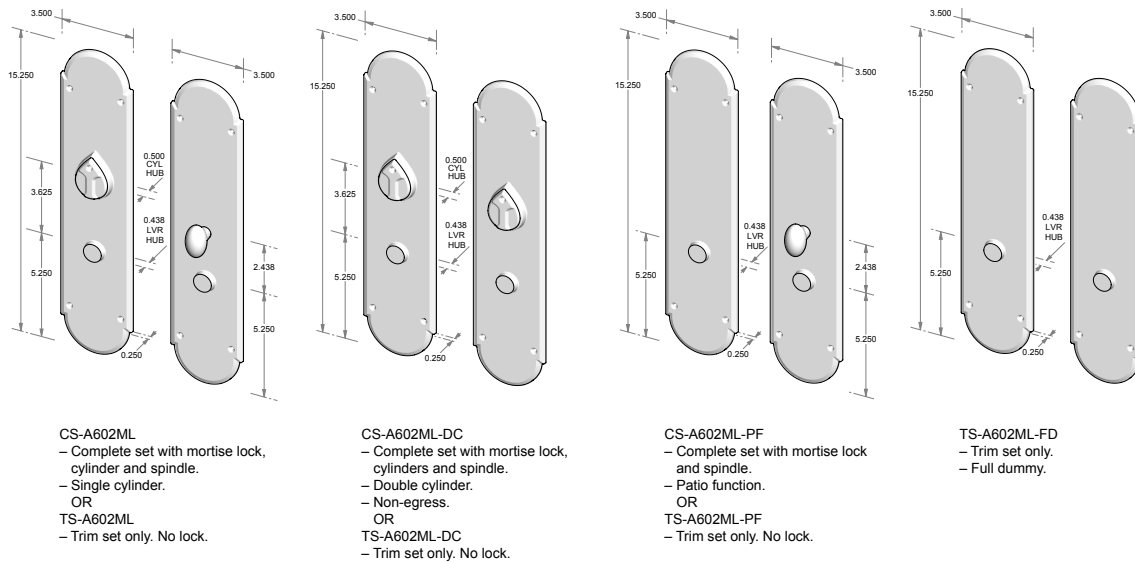

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-A602ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A602ML-KC (ext) EP-A602ML-TPC (int)*
CS-A602ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A602ML-KC (ext) EP-A602ML-KC (int) Non-egress * **
CS-A602ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A602ML (ext) EP-A602ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-A602ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-A602ML-KC (ext) EP-A602ML-TPC (int)
TS-A602ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-A602ML-KC (ext) EP-A602ML-KC (int)*
TS-A602ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-A602ML (ext) EP-A602ML-TPC (int)
TS-A602ML-FD	Full dummy. Lever/knob x lever knob ML dummy set. P-A602ML-D (ext) P-A602ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



OP700 OVAL LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

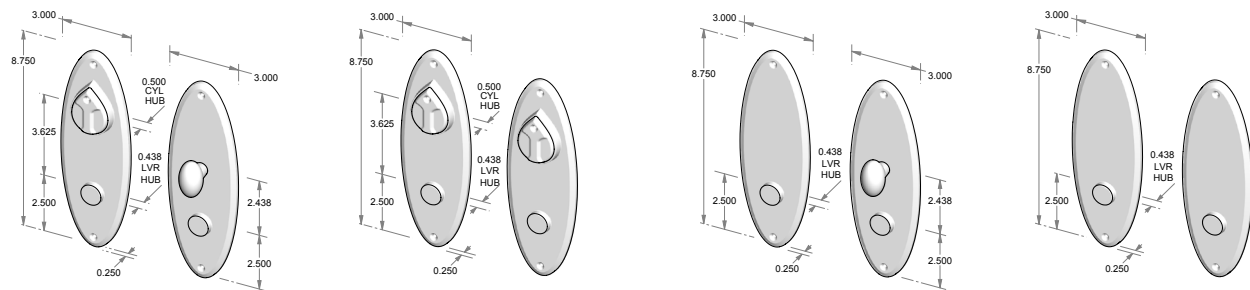

CS-OP700ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
OR
TS-OP700ML
– Trim set only. No lock.

CS-OP700ML-DC
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Non-egress.
OR
TS-OP700ML-DC
– Trim set only. No lock.

CS-OP700ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-OP700ML-PF
– Trim set only. No lock.

TS-OP700ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-OP700ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-OP700ML-KC (ext) EP-OP700ML-TPC (int)*
CS-OP700ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-OP700ML-KC (ext) EP-OP700ML-KC (int) Non-egress * **
CS-OP700ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-OP700 (ext) EP-OP700ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-OP700ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-OP700ML-KC (ext) EP-OP700ML-TPC (int)
TS-OP700ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-OP700ML-KC (ext) EP-OP700ML-KC (int)*
TS-OP700ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-OP700 (ext) EP-OP700ML-TPC (int)
TS-OP700ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-OP700D (ext) P-OP700D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.563".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




RP925 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-RP925ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with CC-400ML-C.
 OR
TS-RP925ML
 – Trim set only. No lock.



CS-RP925ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with CC-400ML-C.
 – Non-egress.
 OR
TS-RP925ML-DC
 – Trim set only. No lock.



CS-RP925ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-RP925ML-PF
 – Trim set only. No lock.



TS-RP925ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/RP-9158ML-TPC (int)*
CS-RP925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/CC-400ML-C (int) Non-egress * **
CS-RP925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-925 (ext) RP-925 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/RP-9158ML-TPC (int)
TS-RP925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/CC-400ML-C (int)*
TS-RP925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-925 (ext) RP-925 w/RP-9158ML-TPC (int)
TS-RP925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-925D (ext) RP-925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP925 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-F-RP925ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
– Shown with CC-400ML-C.
OR
TS-F-RP925ML
– Trim set only. No lock.



CS-F-RP925ML-DC
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Shown with CC-400ML-C.
– Non-egress.
OR
TS-F-RP925ML-DC
– Trim set only. No lock.



CS-F-RP925ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-F-RP925ML-PF
– Trim set only. No lock.



TS-F-RP925ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/RP-9158ML-TPC (int)*
CS-F-RP925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/CC-400ML-C (int) Non-egress * **
CS-F-RP925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-925 (ext) RP-925 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/RP-9158ML-TPC (int)
TS-F-RP925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-925 w/ CC-400ML-C (ext) RP-925 w/CC-400ML-C (int)*
TS-F-RP925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-925 (ext) RP-925 w/RP-9158ML-TPC (int)
TS-F-RP925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-925D (ext) RP-925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




925 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

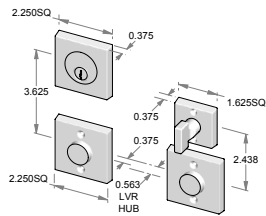


CS-925ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 9503ML-C.
 OR
TS-925ML
 – Trim set only. No lock.



CS-925ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 9503ML-C.
 – Non-egress.
 OR
TS-925ML-DC
 – Trim set only. No lock.

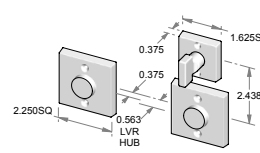

CS-925ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-925ML-PF
 – Trim set only. No lock.



TS-925ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9158ML-TPC (int)*
CS-925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9502ML-C (int) Non-egress * **
CS-925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-925 (ext) P-925 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9158ML-TPC (int)
TS-925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9502ML-C (int)*
TS-925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-925 (ext) P-925 w/9158ML-TPC (int)
TS-925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-925D (ext) P-925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F925 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

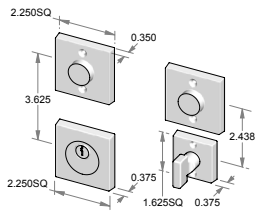


CS-F925ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with 9503ML-C.
 OR
TS-F925ML
 - Trim set only. No lock.



CS-F925ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with 9503ML-C.
 - Non-egress.
 OR
TS-F925ML-DC
 - Trim set only. No lock.



CS-F925ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-F925ML-PF
 - Trim set only. No lock.



TS-F925ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9158ML-TPC (int)*
CS-F925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9502ML-C (int) Non-egress * **
CS-F925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-925 (ext) P-925 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9158ML-TPC (int)
TS-F925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-925 w/9503ML-C (ext) P-925 w/9502ML-C (int)*
TS-F925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-925 (ext) P-925 w/9158ML-TPC (int)
TS-F925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-925D (ext) P-925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




RP926 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

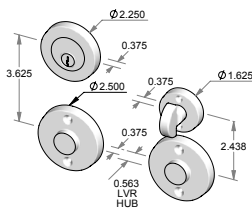


CS-RP926ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with 9507ML-C.
 OR
TS-RP926ML
 - Trim set only. No lock.



CS-RP926ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with 9507ML-C.
 - Non-egress.
 OR
TS-RP926ML-DC
 - Trim set only. No lock.



CS-RP926ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-RP926ML-PF
 - Trim set only. No lock.



TS-RP926ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/RP-9158ML-TPC (int)*
CS-RP926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/9504ML-C (int) Non-egress * **
CS-RP926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-926 (ext) RP-926 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/RP-9158ML-TPC (int)
TS-RP926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/9504ML-C (int)*
TS-RP926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-926 (ext) RP-926 w/RP-9158ML-TPC (int)
TS-RP926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-926D (ext) RP-926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP926 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

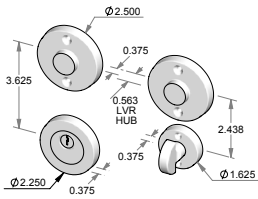


CS-F-RP926ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 9507ML-C.
 OR
TS-F-RP926ML
 – Trim set only. No lock.



CS-F-RP926ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 9507ML-C.
 – Non-egress.
 OR
TS-F-RP926ML-DC
 – Trim set only. No lock.



CS-F-RP926ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F-RP926ML-PF
 – Trim set only. No lock.



TS-F-RP926ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/RP-9158ML-TPC (int)*
CS-F-RP926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/9504ML-C (int) Non-egress * **
CS-F-RP926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-926 (ext) RP-926 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/RP-9158ML-TPC (int)
TS-F-RP926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-926 w/9507ML-C (ext) RP-926 w/9504ML-C (int)*
TS-F-RP926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-926 (ext) RP-926 w/RP-9158ML-TPC (int)
TS-F-RP926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-926D (ext) RP-926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




926 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

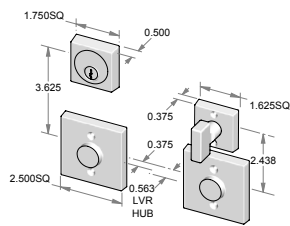


CS-926ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 405ML-C.
 OR
TS-926ML
 – Trim set only. No lock.



CS-926ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 405ML-C.
 – Non-egress.
 OR
TS-926ML-DC
 – Trim set only. No lock.

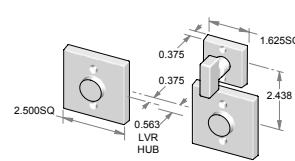

CS-926ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-926ML-PF
 – Trim set only. No lock.

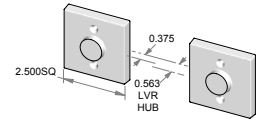

TS-926ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/405ML-C (ext) P-926 w/9158ML-TPC (int)*
CS-926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/405ML-C (ext) P-926 w/9509ML-C (int) Non-egress * **
CS-926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-926 (ext) P-926 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/405ML-C (ext) P-926 w/9158ML-TPC (int)
TS-926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/405ML-C (ext) P-926 w/9509ML-C (int)*
TS-926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-926 (ext) P-926 w/9158ML-TPC (int)
TS-926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-926D (ext) P-926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F926 CONTEMPORARY LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

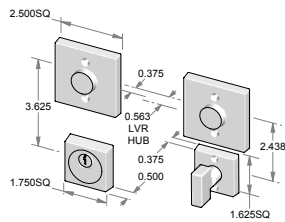


CS-F926ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with CC-405ML-C.
 OR
TS-F926ML
 – Trim set only. No lock.



CS-F926ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with CC-405ML-C.
 – Non-egress.
 OR
TS-F926ML-DC
 – Trim set only. No lock.

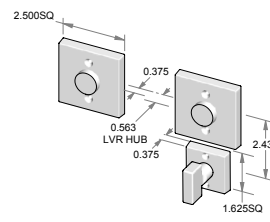

CS-F926ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F926ML-PF
 – Trim set only. No lock.

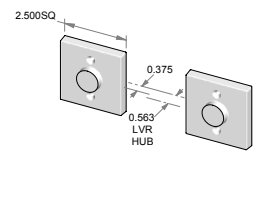

TS-F926ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/ CC-405ML-C (ext) P-926 w/9158ML-TPC (int)*
CS-F926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/ CC-405ML-C (ext) P-926 w/CC-405ML-C (int) Non-egress * **
CS-F926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-926 (ext) P-926 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/ CC-405ML-C (ext) P-926 w/9158ML-TPC (int)
TS-F926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-926 w/ CC-405ML-C (ext) P-926 w/CC-405ML-C (int)*
TS-F926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-926 (ext) P-926 w/9158ML-TPC (int)
TS-F926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-926D (ext) P-926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




950 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

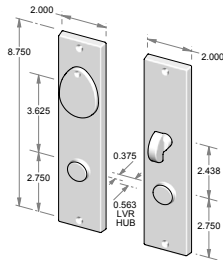


CS-950ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-950ML
 – Trim set only. No lock.



CS-950ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-950ML-DC-NKC
 – Trim set only. No lock.

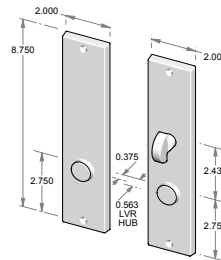

CS-950ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-950ML-PF
 – Trim set only. No lock.

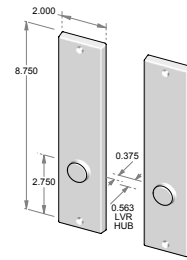

TS-950ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-950ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-950ML-KC (ext) EP-950ML-TPC (int)*
CS-950ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-950ML-NKC (ext) EP-950ML-NKC (int) Non-egress * **
CS-950ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-950 (ext) EP-950ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-950ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-950ML-KC (ext) EP-950ML-TPC (int)
TS-950ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-950ML-NKC (ext) EP-950ML-NKC (int)*
TS-950ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-950 (ext) EP-950ML-TPC (int)
TS-950ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-950D (ext) P-950D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F950 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

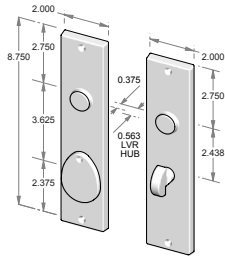


CS-F950ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F950ML
 – Trim set only. No lock.



CS-F950ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F950ML-DC-NKC
 – Trim set only. No lock.

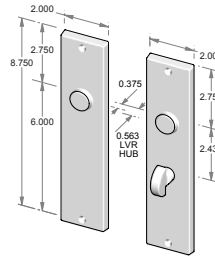

CS-F950ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F950ML-PF
 – Trim set only. No lock.

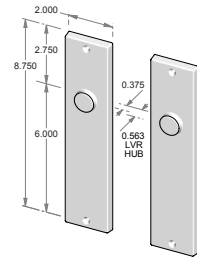

TS-F950ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F950ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F950ML-KC (ext) EP-F950ML-TPC (int)*
CS-F950ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F950ML-NKC (ext) EP-F950ML-NKC (int) Non-egress * **
CS-F950ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F950 (ext) EP-F950ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10NF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F950ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F950ML-KC (ext) EP-F950ML-TPC (int)
TS-F950ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F950ML-NKC (ext) EP-F950ML-NKC (int)*
TS-F950ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F950 (ext) EP-F950ML-TPC (int)
TS-F950ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F950D (ext) P-F950D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




951 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

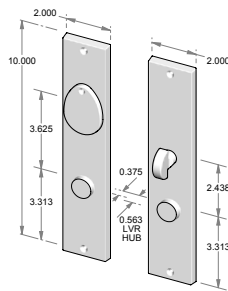


CS-951ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-951ML
 - Trim set only. No lock.



CS-951ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
TS-951ML-DC-NKC
 - Trim set only. No lock.

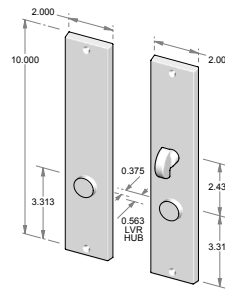

CS-951ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-951ML-PF
 - Trim set only. No lock.

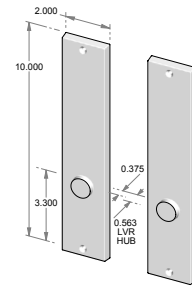

TS-951ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-951ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-951ML-KC (ext) EP-951ML-TPC (int)*
CS-951ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-951ML-NKC (ext) EP-951ML-NKC (int) Non-egress * **
CS-951ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-951ML (ext) EP-951ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-951ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-951ML-KC (ext) EP-951ML-TPC (int)
TS-951ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-951ML-NKC (ext) EP-951ML-NKC (int)*
TS-951ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-951ML (ext) EP-951ML-TPC (int)
TS-951ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-951ML-D (ext) P-951ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




F951 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-F951ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
OR
TS-F951ML
– Trim set only. No lock.



CS-F951ML-DC-NKC*
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Shown without key cover. Must be specified NKC.
– Non-egress.
OR
TS-F951ML-DC-NKC
– Trim set only. No lock.

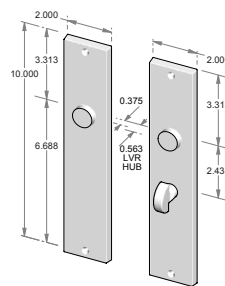

CS-F951ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-F951ML-PF
– Trim set only. No lock.

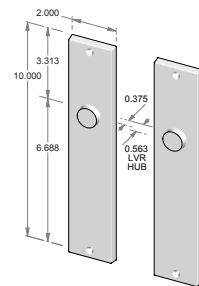

TS-F951ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F951ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F951ML-KC (ext) EP-F951ML-TPC (int)*
CS-F951ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F951ML-NKC (ext) EP-F951ML-NKC (int) Non-egress * **
CS-F951ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F951ML (ext) EP-F951ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10NF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F951ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F951ML-KC (ext) EP-F951ML-TPC (int)
TS-F951ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F951ML-NKC (ext) EP-F951ML-NKC (int)*
TS-F951ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F951ML (ext) EP-F951ML-TPC (int)
TS-F951ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F951ML-D (ext) P-F951ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



952 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

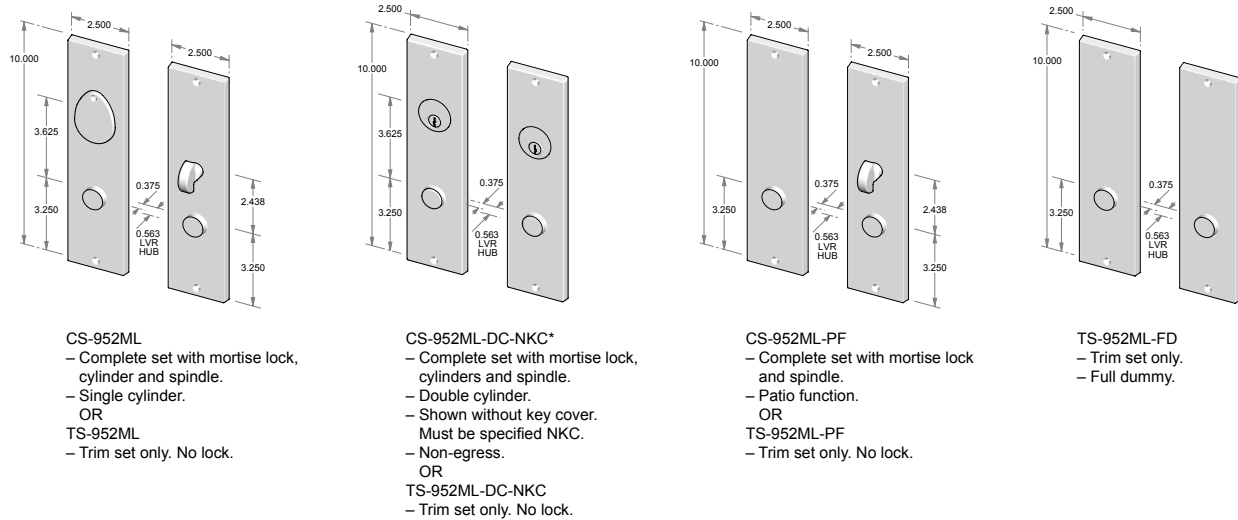

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-952ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-952ML-KC (ext) EP-952ML-TPC (int)*
CS-952ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-952ML-NKC (ext) EP-952ML-NKC (int) Non-egress * **
CS-952ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-952ML (ext) EP-952ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-952ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-952ML-KC (ext) EP-952ML-TPC (int)
TS-952ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-952ML-NKC (ext) EP-952ML-NKC (int)*
TS-952ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-952ML (ext) EP-952ML-TPC (int)
TS-952ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-952ML-D (ext) P-952ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F952 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

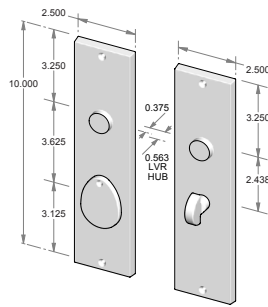


CS-F952ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F952ML
 – Trim set only. No lock.

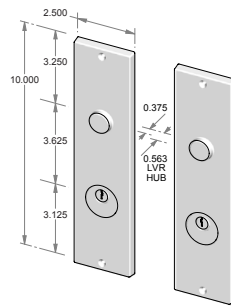

CS-F952ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F952ML-DC-NKC
 – Trim set only. No lock.

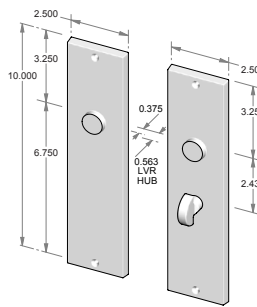

CS-F952ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F952ML-PF
 – Trim set only. No lock.

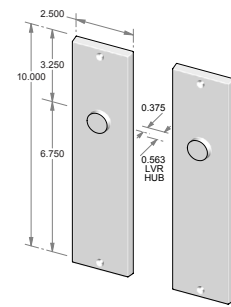

TS-F952ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F952ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F952ML-KC (ext) EP-F952ML-TPC (int)*
CS-F952ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F952ML-NKC (ext) EP-F952ML-NKC (int) Non-egress * **
CS-F952ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F952ML (ext) EP-F952ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F952ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F952ML-KC (ext) EP-F952ML-TPC (int)
TS-F952ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F952ML-NKC (ext) EP-F952ML-NKC (int)*
TS-F952ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F952ML (ext) EP-F952ML-TPC (int)
TS-F952ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F952ML-D (ext) P-F952ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



953 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

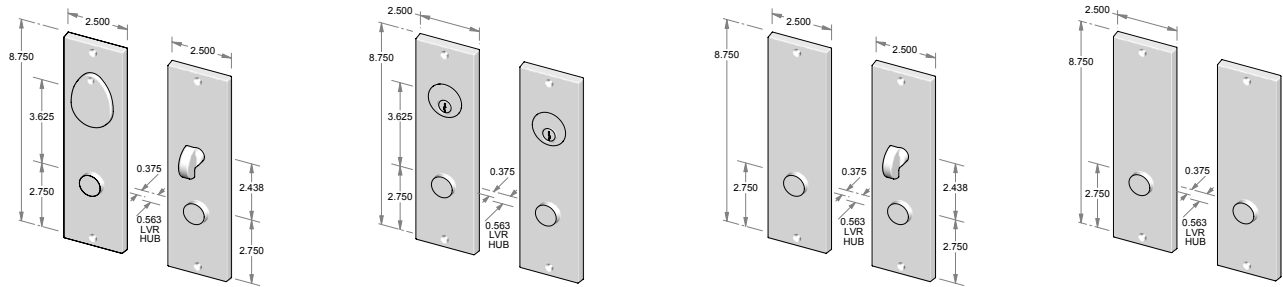

CS-953ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-953ML
 – Trim set only. No lock.

CS-953ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-953ML-DC-NKC
 – Trim set only. No lock.

CS-953ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-953ML-PF
 – Trim set only. No lock.

TS-953ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-953ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-953ML-KC (ext) EP-953ML-TPC (int)*
CS-953ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-953ML-NKC (ext) EP-953ML-NKC (int) Non-egress * **
CS-953ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-953 (ext) EP-953ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-953ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-953ML-KC (ext) EP-953ML-TPC (int)
TS-953ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-953ML-NKC (ext) EP-953ML-NKC (int)*
TS-953ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-953 (ext) EP-953ML-TPC (int)
TS-953ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-953D (ext) P-953D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F953 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

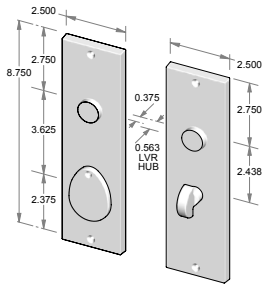


CS-F953ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-F953ML
 - Trim set only. No lock.



CS-F953ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
TS-F953ML-DC-NKC
 - Trim set only. No lock.

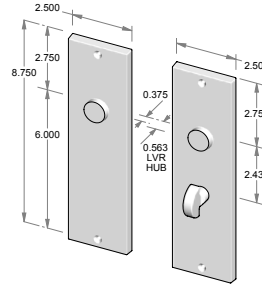

CS-F953ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-F953ML-PF
 - Trim set only. No lock.

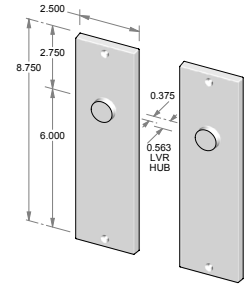

TS-F953ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F953ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F953ML-KC (ext) EP-F953ML-TPC (int)*
CS-F953ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F953ML-NKC (ext) EP-F953ML-NKC (int) Non-egress * **
CS-F953ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F953 (ext) EP-F953ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F953ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F953ML-KC (ext) EP-F953ML-TPC (int)
TS-F953ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F953ML-NKC (ext) EP-F953ML-NKC (int)*
TS-F953ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F953 (ext) EP-F953ML-TPC (int)
TS-F953ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F953D (ext) P-F953D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



955 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

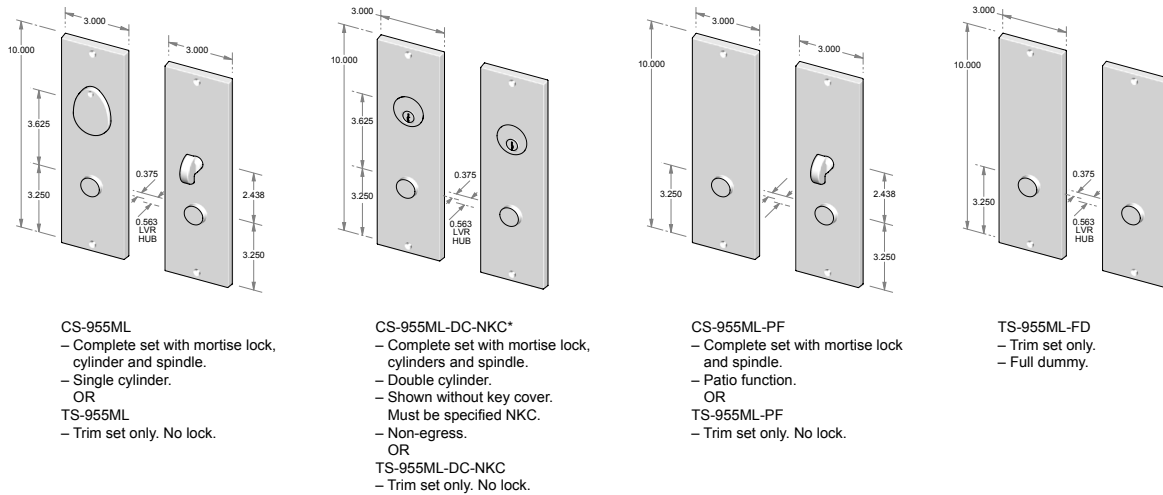

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-955ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-955ML-KC (ext) EP-955ML-TPC (int)*
CS-955ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-955ML-NKC (ext) EP-955ML-NKC (int) Non-egress * **
CS-955ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-955 (ext) EP-955ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-955ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-955ML-KC (ext) EP-955ML-TPC (int)
TS-955ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-955ML-NKC (ext) EP-955ML-NKC (int)*
TS-955ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-955 (ext) EP-955ML-TPC (int)
TS-955ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-955D (ext) P-955D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F955 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

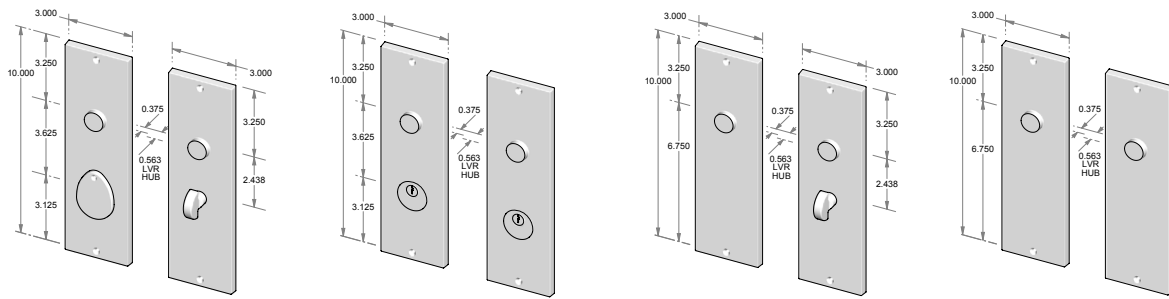

CS-F955ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F955ML
 – Trim set only. No lock.

CS-F955ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F955ML-DC-NKC
 – Trim set only. No lock.

CS-F955ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F955ML-PF
 – Trim set only. No lock.

TS-F955ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F955ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F955ML-KC (ext) EP-F955ML-TPC (int)*
CS-F955ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F955ML-NKC (ext) EP-F955ML-NKC (int) Non-egress * **
CS-F955ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F955 (ext) EP-F955ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F955ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F955ML-KC (ext) EP-F955ML-TPC (int)
TS-F955ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F955ML-NKC (ext) EP-F955ML-NKC (int)*
TS-F955ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F955 (ext) EP-F955ML-TPC (int)
TS-F955ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F955D (ext) P-F955D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



956 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

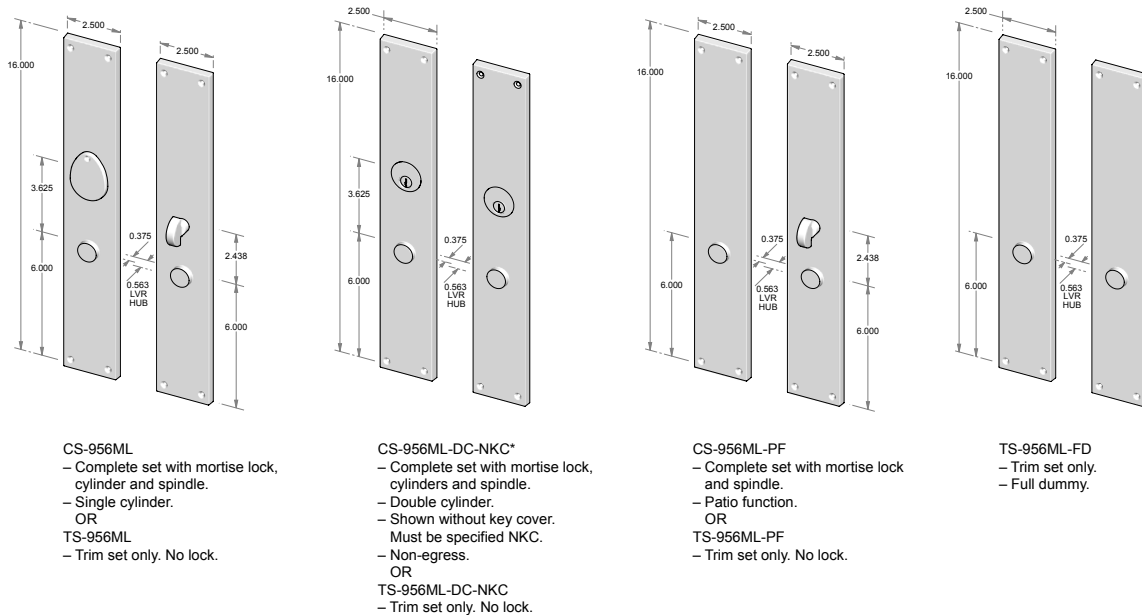

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-956ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-956ML-KC (ext) EP-956ML-TPC (int)*
CS-956ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-956ML-NKC (ext) EP-956ML-NKC (int) Non-egress * **
CS-956ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-956 (ext) EP-956ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-956ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-956ML-KC (ext) EP-956ML-TPC (int)
TS-956ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-956ML-NKC (ext) EP-956ML-NKC (int)*
TS-956ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-956 (ext) EP-956ML-TPC (int)
TS-956ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-956D (ext) P-956D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



F956 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

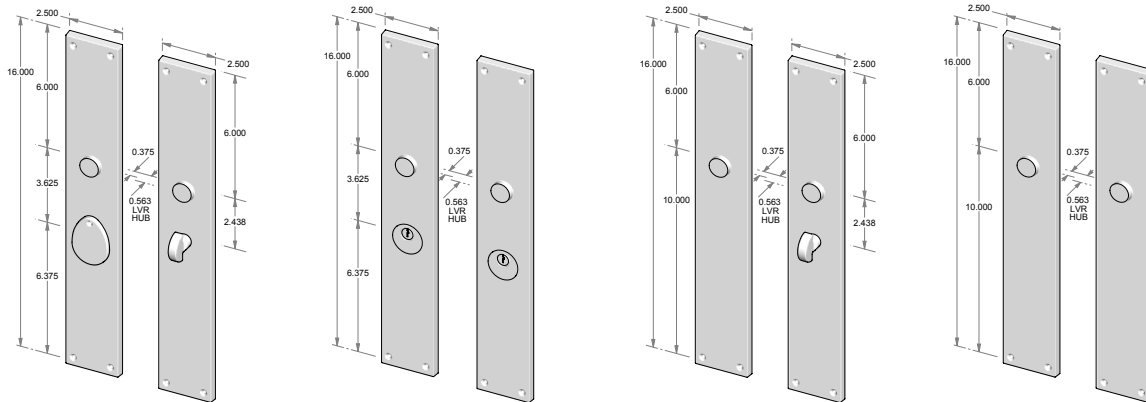

CS-F956ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F956ML
 – Trim set only. No lock.

CS-F956ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F956ML-DC-NKC
 – Trim set only. No lock.

CS-F956ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F956ML-PF
 – Trim set only. No lock.

TS-F956ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F956ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F956ML-KC (ext) EP-F956ML-TPC (int)*
CSF956ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F956ML-NKC (ext) EP-F956ML-NKC (int) Non-egress * **
CS-F956ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F956 (ext) EP-F956ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F956ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F956ML-KC (ext) EP-F956ML-TPC (int)
TS-F956ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F956ML-NKC (ext) EP-F956ML-NKC (int)*
TS-F956ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F956 (ext) EP-F956ML-TPC (int)
TS-F956ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F956D (ext) P-F956D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




957 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

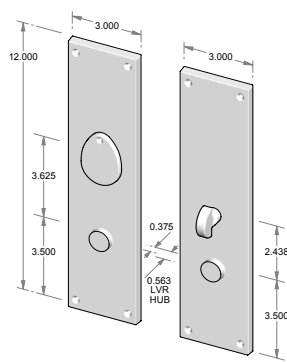


CS-957ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-957ML
 – Trim set only. No lock.

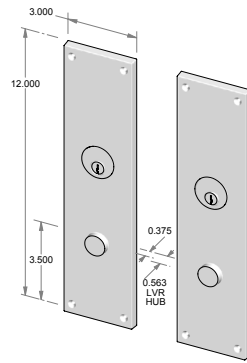

CS-957ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-957ML-DC-NKC
 – Trim set only. No lock.

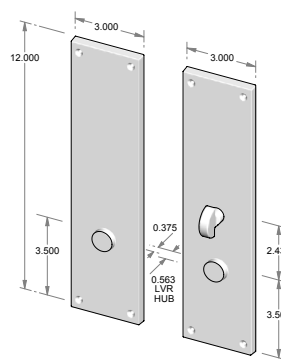

CS-957ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-957ML-PF
 – Trim set only. No lock.

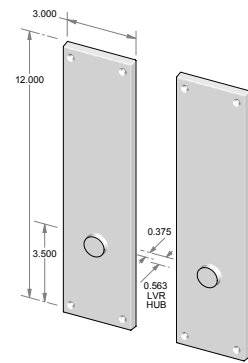

TS-957ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-957ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-957ML-KC (ext) EP-957ML-TPC (int)*
CS-957ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-957ML-NKC (ext) EP-957ML-NKC (int) Non-egress * **
CS-957ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-957 (ext) EP-957ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-957ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-957ML-KC (ext) EP-957ML-TPC (int)
TS-957ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-957ML-NKC (ext) EP-957ML-NKC (int)*
TS-957ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-957 (ext) EP-957ML-TPC (int)
TS-957ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-957D (ext) P-957D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F957 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

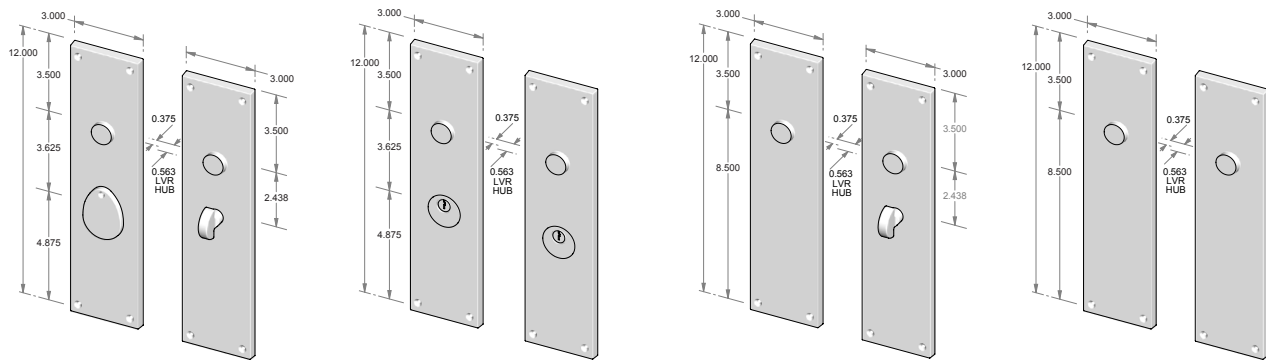

CS-F957ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F957ML
 – Trim set only. No lock.

CS-F957ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F957ML-DC-NKC
 – Trim set only. No lock.

CS-F957ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F957ML-PF
 – Trim set only. No lock.

TS-F957ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F957ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F957ML-KC (ext) EP-F957ML-TPC (int)*
CS-F957ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F957ML-NKC (ext) EP-F957ML-NKC (int) Non-egress * **
CS-F957ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F957 (ext) EP-F957ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F957ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F957ML-KC (ext) EP-F957ML-TPC (int)
TS-F957ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F957ML-NKC (ext) EP-F957ML-NKC (int)*
TS-F957ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F957 (ext) EP-F957ML-TPC (int)
TS-F957ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F957D (ext) P-F957D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



958 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

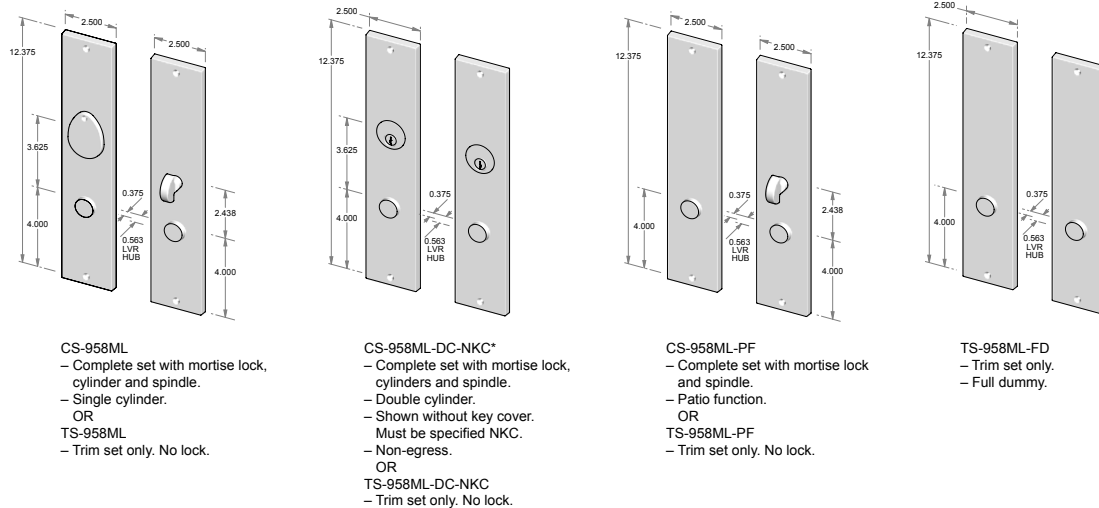

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-958ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-958ML-KC (ext) EP-958ML-TPC (int)*
CS-958ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-958ML-NKC (ext) EP-958ML-NKC (int) Non-egress * **
CS-958ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-958 (ext) EP-958ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-958ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-958ML-KC (ext) EP-958ML-TPC (int)
TS-958ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-958ML-NKC (ext) EP-958ML-NKC (int)*
TS-958ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-958 (ext) EP-958ML-TPC (int)
TS-958ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-958D (ext) P-958D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F958 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

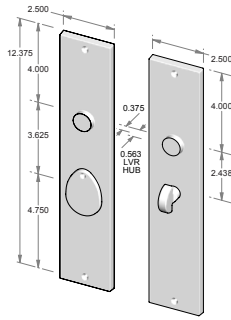


CS-F958ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F958ML
 – Trim set only. No lock.



CS-F958ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F958ML-DC-NKC
 – Trim set only. No lock.

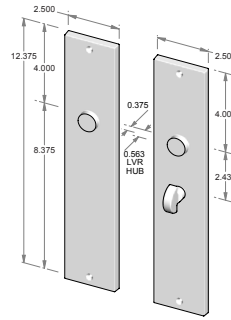

CS-F958ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F958ML-PF
 – Trim set only. No lock.

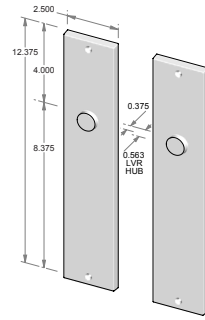

TS-F958ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F958ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F958ML-KC (ext) EP-F958ML-TPC (int)*
CS-F958ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F958ML-NKC (ext) EP-F958ML-NKC (int) Non-egress * **
CS-F958ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F958 (ext) EP-F958ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F958ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F958ML-KC (ext) EP-F958ML-TPC (int)
TS-F958ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F958ML-NKC (ext) EP-F958ML-NKC (int)*
TS-F958ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F958 (ext) EP-F958ML-TPC (int)
TS-F958ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F958D (ext) P-F958D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




959 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-959ML
 – Complete set with mortise lock, cylinder and spindle.
 – Available w/KC-700 only.
 – Single cylinder.
 OR
TS-959ML
 – Trim set only. No lock.



CS-959ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-959ML-DC-NKC
 – Trim set only. No lock.

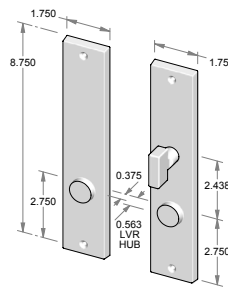

CS-959ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-959ML-PF
 – Trim set only. No lock.

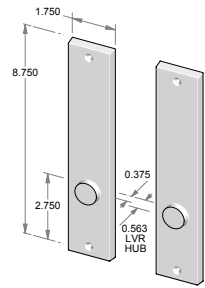

TS-959ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-959ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-959ML-KC (ext) EP-959ML-TPC (int)*
CS-959ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-959ML-NKC (ext) EP-959ML-NKC (int) Non-egress * **
CS-959ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-959 (ext) EP-959ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-959ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-959ML-KC (ext) EP-959ML-TPC (int)
TS-959ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-959ML-NKC (ext) EP-959ML-NKC (int)*
TS-959ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-959 (ext) EP-959ML-TPC (int)
TS-959ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-959D (ext) P-959D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F959 CONTEMPORARY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

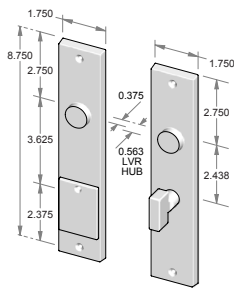


CS-F959ML
 – Complete set with mortise lock, cylinder and spindle.
 – Available w/KC-700 only.
 – Single cylinder.
 OR
TS-F959ML
 – Trim set only. No lock.



CS-F959ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover.
 Must be specified NKC.
 – Non-egress.
 OR
TS-F959ML-DC-NKC
 – Trim set only. No lock.

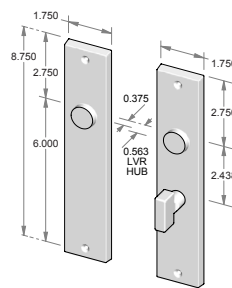

CS-F959ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F959ML-PF
 – Trim set only. No lock.

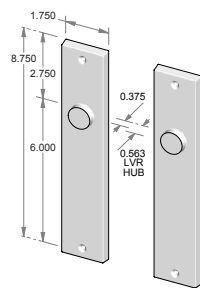

TS-F959ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F959ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F959ML-KC (ext) EP-F959ML-TPC (int)*
CS-F959ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F959ML-NKC (ext) EP-F959ML-NKC (int) Non-egress * **
CSF959ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F959 (ext) EP-F959ML-TPC (int)

Accurate 9100 USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10NF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F959ML	Single cylinder. High lever/knob x lever/knob ML entry set. EP-F959ML-KC (ext) EP-F959ML-TPC (int)
TS-F959ML-DC	Double cylinder. High lever/knob x lever/knob ML entry set. EP-F959ML-NKC (ext) EP-F959ML-NKC (int)*
TS-F959ML-PF	Patio function. High lever/knob x lever/knob ML entry set. P-F959 (ext) EP-F959ML-TPC (int)
TS-F959ML-FD	Full dummy. High lever/knob x lever/knob ML dummy set. P-F959D (ext) P-F959D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



999 CONTEMPORARY ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

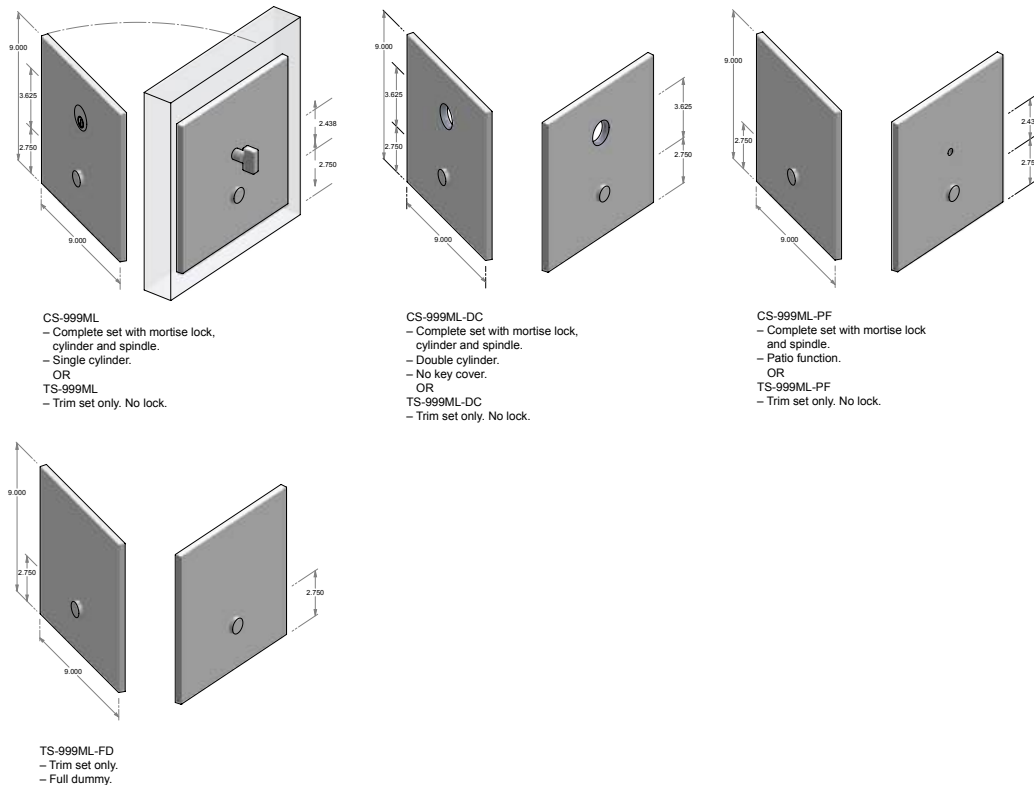

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress). Shown with 5" backset.

CS-999ML	Single cylinder. Knob x knob or lever x lever entry set.
CS-999ML-DC	Double cylinder. Knob x knob or lever x lever entry set.
CS-999ML-PF	Patio function. Knob x knob or lever x lever entry set.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-999ML	Single cylinder. Knob x knob or lever x lever entry set.
TS-999ML-DC	Double cylinder. Knob x knob or lever x lever entry set.
TS-999ML-PF	Patio function. Knob x knob or lever x lever entry set.
TS-999ML-FD	Full dummy. Knob x knob or lever x lever dummy set.

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.


Always specify lever/knob.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F999 CONTEMPORARY ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

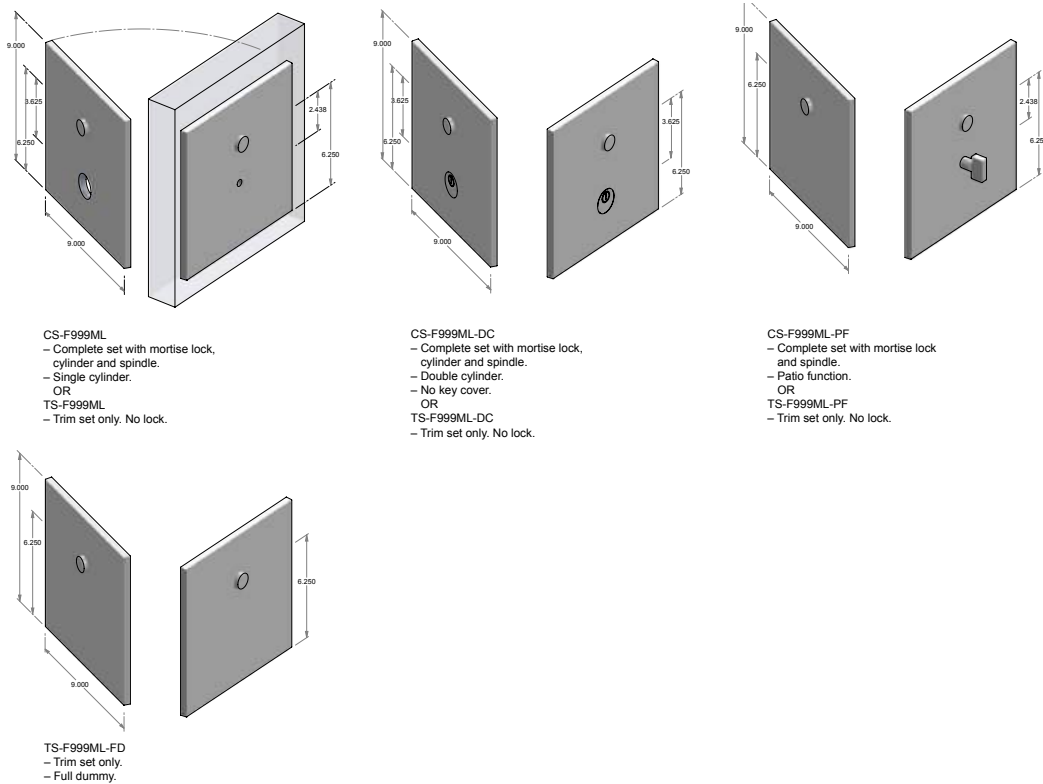

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress). Shown with 5" backset.

CS-F999ML	Single cylinder. Knob x knob or lever x lever entry set.
CS-F999ML-DC	Double cylinder. Knob x knob or lever x lever entry set.
CS-F999ML-PF	Patio function. Knob x knob or lever x lever entry set.

Additional functions and custom backsets available. Call for options and pricing.
 Door handing and thickness is required for all lever/knob mortise lock entry sets.
 Always specify lever/knob.
 UC-F included in pricing.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F999ML	Single cylinder. Knob x knob or lever x lever entry set.
TS-F999ML-DC	Double cylinder. Knob x knob or lever x lever entry set.
TS-F999ML-PF	Patio function. Knob x knob or lever x lever entry set.
TS-F999ML-FD	Full dummy. Knob x knob or lever x lever dummy set.


Specify manufacturer and function of lock to be used.
 Door handing and thickness is required for all lever/knob mortise lock entry sets.
 Always specify lever/knob.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1245 FLEUR DE LIS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

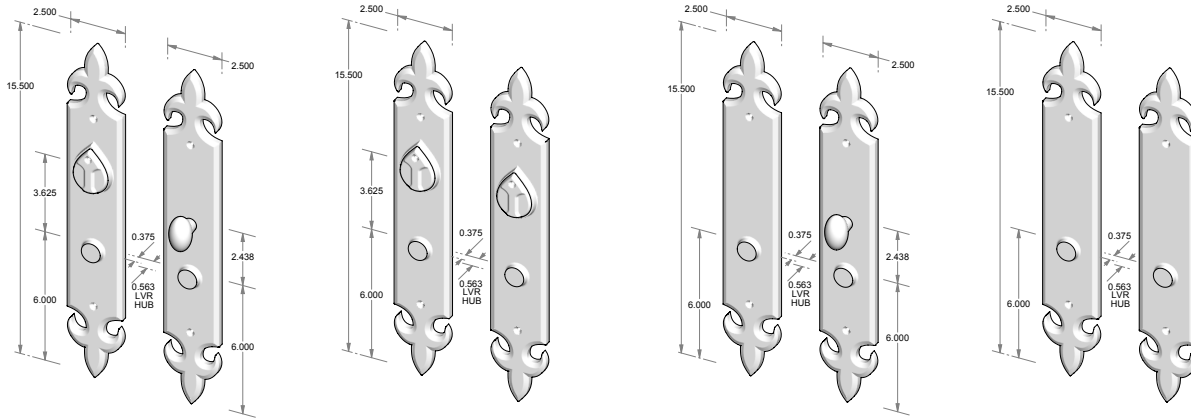

CS-1245ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-1245ML
 - Trim set only. No lock.

CS-1245ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-1245ML-DC
 - Trim set only. No lock.

CS-1245ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-1245ML-PF
 - Trim set only. No lock.

TS-1245ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1245ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1245ML-KC (ext) EP-1245ML-TPC (int)*
CS-1245ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1245ML-KC (ext) EP-1245ML-KC (int) Non-egress * **
CS-1245ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1245ML (ext) EP-1245ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.688".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1245ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1245ML-KC (ext) EP-1245ML-TPC (int)
TS-1245ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1245ML-KC (ext) EP-1245ML-KC (int)*
TS-1245ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1245ML (ext) EP-1245ML-TPC (int)
TS-1245ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1245ML-D (ext) P-1245ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.688".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



1250 FLEUR DE LIS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

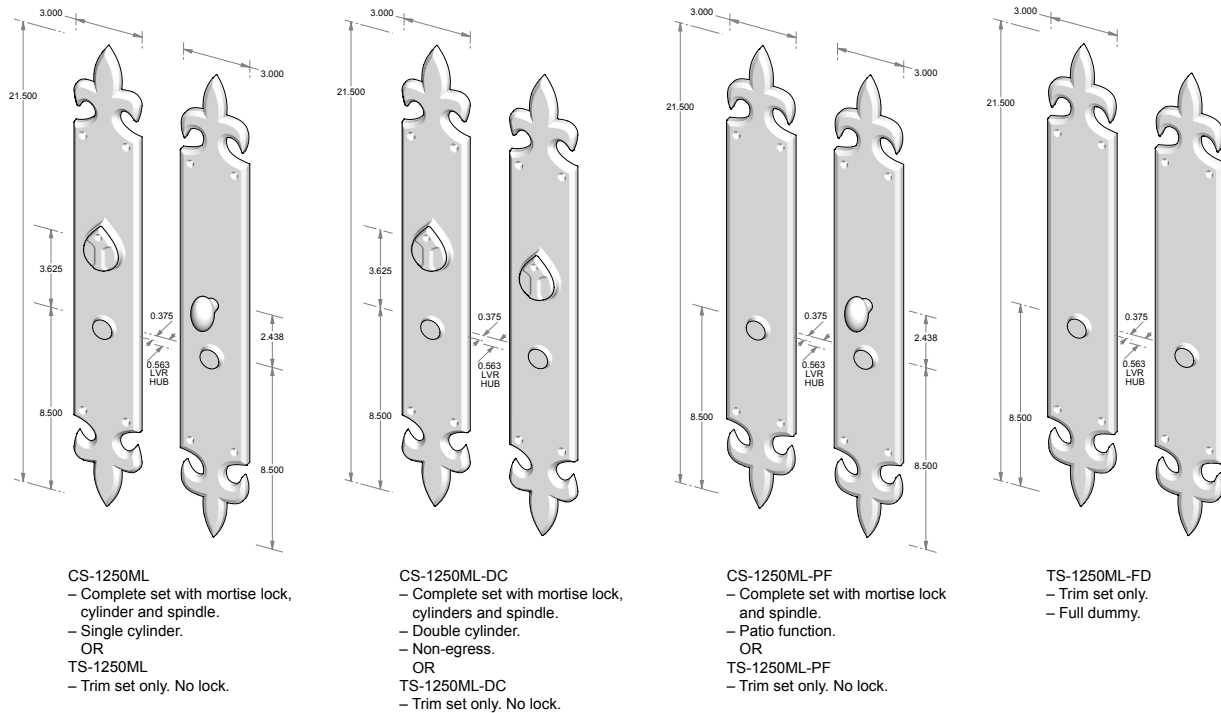

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1250ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1250ML-KC (ext) EP-1250ML-TPC (int)*
CS-1250ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1250ML-KC (ext) EP-1250ML-KC (int) Non-egress * **
CS-1250ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1250ML (ext) EP-1250ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.688".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1250ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1250ML-KC (ext) EP-1250ML-TPC (int)
TS-1250ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1250ML-KC (ext) EP-1250ML-KC (int)*
TS-1250ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1250ML (ext) EP-1250ML-TPC (int)
TS-1250ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1250ML-D (ext) P-1250ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.688".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




420 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-420ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-420ML
 – Trim set only. No lock.



CS-420ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-420ML-DC
 – Trim set only. No lock.

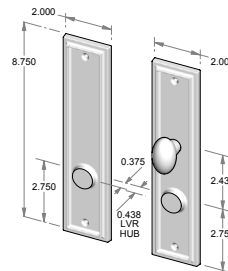

CS-420ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-420ML-PF
 – Trim set only. No lock.

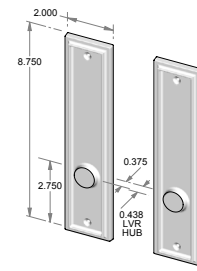

TS-420ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-420ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-420ML-KC (ext) EP-420ML-TPC (int)*
CS-420ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-420ML-KC (ext) EP-420ML-KC (int) Non-egress * **
CS-420ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-420 (ext) EP-420ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-420ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-420ML-KC (ext) EP-420ML-TPC (int)
TS-420ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-420ML-KC (ext) EP-420ML-KC (int)*
TS-420ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-420 (ext) EP-420ML-TPC (int)
TS-420ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-420D (ext) P-420D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder hub height 0.563".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




421 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

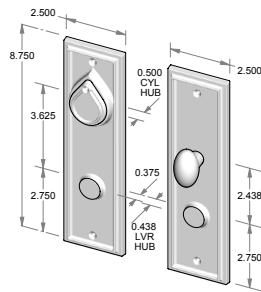


CS-421ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-421ML
 – Trim set only. No lock.



CS-421ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-421ML-DC
 – Trim set only. No lock.

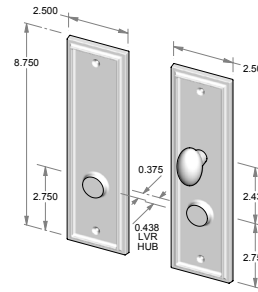

CS-421ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-421ML-PF
 – Trim set only. No lock.

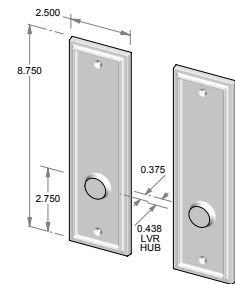

TS-421ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-421ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-421ML-KC (ext) EP-421ML-TPC (int)*
CS-421ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-421ML-KC (ext) EP-421ML-KC (int) Non-egress * **
CS-421ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-421 (ext) EP-421ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-421ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-421ML-KC (ext) EP-421ML-TPC (int)
TS-421ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-421ML-KC (ext) EP-421ML-KC (int)*
TS-421ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-421 (ext) EP-421ML-TPC (int)
TS-421ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-421D (ext) P-421D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.563".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



422 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

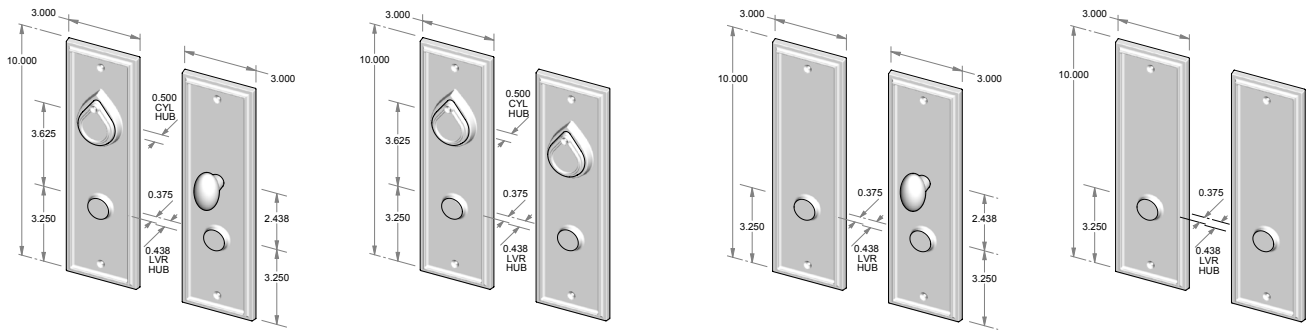

CS-422ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-422ML
 – Trim set only. No lock.

CS-422ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-422ML-DC
 – Trim set only. No lock.

CS-422ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-422ML-PF
 – Trim set only. No lock.

TS-422ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-422ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-422ML-KC (ext) EP-422ML-TPC (int)*
CS-422ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-422ML-KC (ext) EP-422ML-KC (int) Non-egress * **
CS-422ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-422 (ext) EP-422ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-422ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-422ML-KC (ext) EP-422ML-TPC (int)
TS-422ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-422ML-KC (ext) EP-422ML-KC (int)*
TS-422ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-422 (ext) EP-422ML-TPC (int)
TS-422ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-422D (ext) P-422D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.563".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




423 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

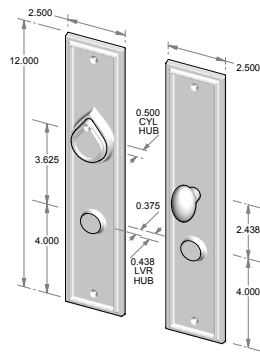


CS-423ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-423ML
 – Trim set only. No lock.

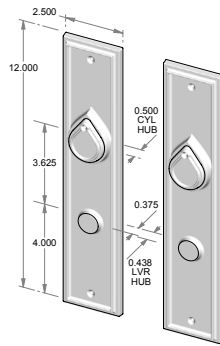

CS-423ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-423ML-DC
 – Trim set only. No lock.

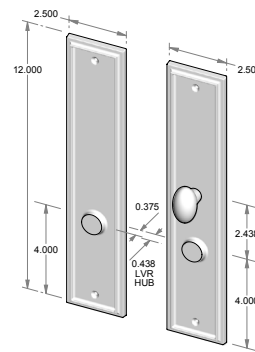

CS-423ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-423ML-PF
 – Trim set only. No lock.

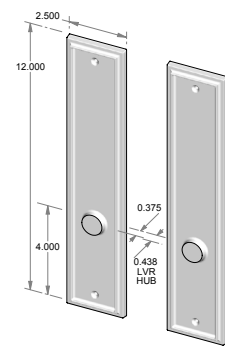

TS-423ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-423ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-423ML-KC (ext) EP-423ML-TPC (int)*
CS-423ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-423ML-KC (ext) EP-423ML-KC (int) Non-egress * **
CS-423ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-423ML (ext) EP-423ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-423ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-423ML-KC (ext) EP-423ML-TPC (int)
TS-423ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-423ML-KC (ext) EP-423ML-KC (int)*
TS-423ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-423ML (ext) EP-423ML-TPC (int)
TS-423ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-423ML-D (ext) P-423ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.563".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




424 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




- CS-424ML**
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-424ML
 – Trim set only. No lock.



- CS-424ML-DC**
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-424ML-DC
 – Trim set only. No lock.

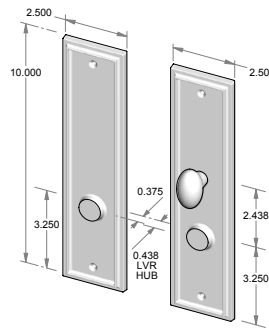

- CS-424ML-PF**
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-424ML-PF
 – Trim set only. No lock.

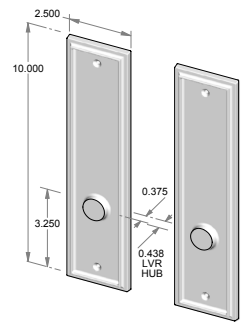

- TS-424ML-FD**
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-424ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-424ML-KC (ext) EP-424ML-TPC (int)*
CS-424ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-424ML-KC (ext) EP-424ML-KC (int) Non-egress * **
CS-424ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-424 (ext) EP-424ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-424ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-424ML-KC (ext) EP-424ML-TPC (int)
TS-424ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-424ML-KC (ext) EP-424ML-KC (int)*
TS-424ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-424 (ext) EP-424ML-TPC (int)
TS-424ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-424D (ext) P-424D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.563".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



425 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

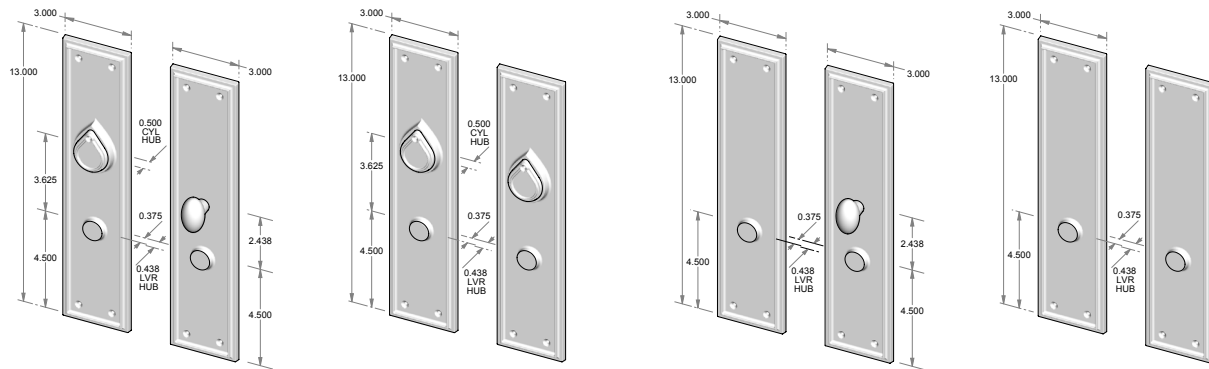

CS-425ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-300 and TPC-306.
 OR
TS-425ML
 - Trim set only. No lock.

CS-425ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-300.
 - Non-egress.
 OR
TS-425ML-DC
 - Trim set only. No lock.

CS-425ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 - Shown with TPC-306.
 OR
TS-425ML-PF
 - Trim set only. No lock.

TS-425ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-425ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-425ML-KC (ext) EP-425ML-TPC (int)*
CS-425ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-425ML-KC (ext) EP-425ML-KC (int) Non-egress * **
CS-425ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-425 (ext) EP-425ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-425ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-425ML-KC (ext) EP-425ML-TPC (int)
TS-425ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-425ML-KC (ext) EP-425ML-KC (int)*
TS-425ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-425 (ext) EP-425ML-TPC (int)
TS-425ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-425D (ext) P-425D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.563".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



426 RIDGE LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

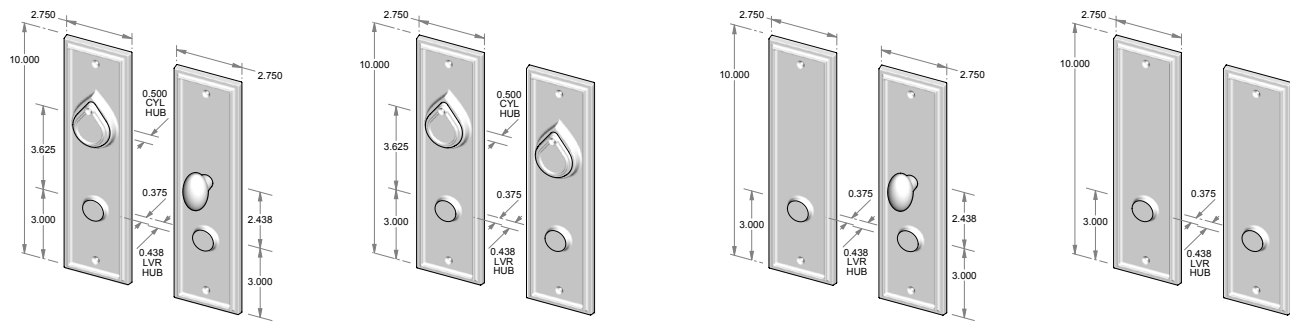

CS-426ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-426ML
 – Trim set only. No lock.

CS-426ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-426ML-DC
 – Trim set only. No lock.

CS-426ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-426ML-PF
 – Trim set only. No lock.

TS-426ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-426ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-426ML-KC (ext) EP-426ML-TPC (int)*
CS-426ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-426ML-KC (ext) EP-426ML-KC (int) Non-egress * **
CS-426ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-426 (ext) EP-426ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.563".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-426ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-426ML-KC (ext) EP-426ML-TPC (int)
TS-426ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-426ML-KC (ext) EP-426ML-KC (int)*
TS-426ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-426 (ext) EP-426ML-TPC (int)
TS-426ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-426D (ext) P-426D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.563".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



431 CORRUGATED w/BAND LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

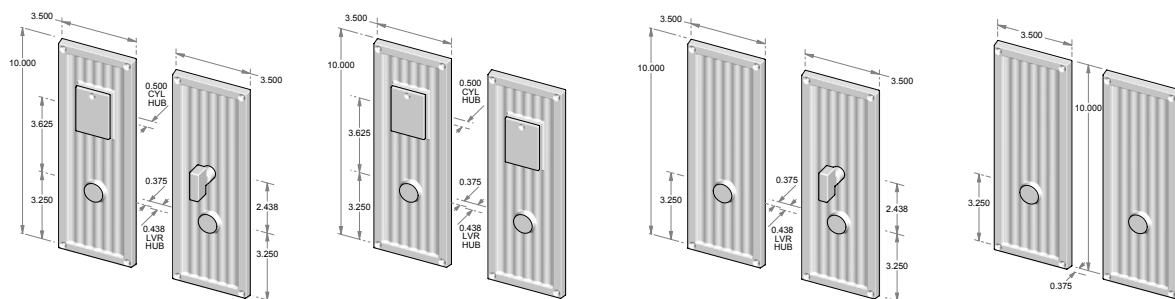

CS-431ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-431ML
 – Trim set only. No lock.

CS-431ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-431ML-DC
 – Trim set only. No lock.

CS-431ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-431ML-PF
 – Trim set only. No lock.

TS-431ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-431ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-431ML-KC (ext) EP-431ML-TPC (int)*
CS-431ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-431ML-KC (ext) EP-431ML-KC (int) Non-egress * **
CS-431ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-431 (ext) EP-431ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-431ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-431ML-KC (ext) EP-431ML-TPC (int)
TS-431ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-431ML-KC (ext) EP-431ML-KC (int)*
TS-431ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-431 (ext) EP-431ML-TPC (int)
TS-431ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-431D (ext) P-431D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




440 HAMPTON LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

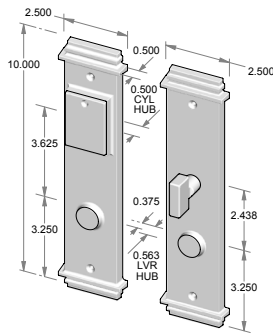


CS-440ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-440ML
 – Trim set only. No lock.



CS-440ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-440ML-DC
 – Trim set only. No lock.

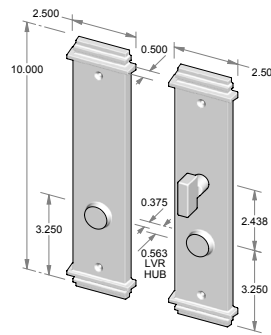

CS-440ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-440ML-PF
 – Trim set only. No lock.

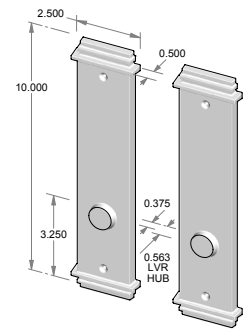

TS-440ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-440ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-440ML-KC (ext) EP-440ML-TPC (int)*
CS-440ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-440ML-KC (ext) EP-440ML-KC (int) Non-egress * **
CS-440ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-440 (ext) EP-440ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.688".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-440ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-440ML-KC (ext) EP-440ML-TPC (int)
TS-440ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-440ML-KC (ext) EP-440ML-KC (int)*
TS-440ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-440 (ext) EP-440ML-TPC (int)
TS-440ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-440D (ext) P-440D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.688".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



441 HAMPTON LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

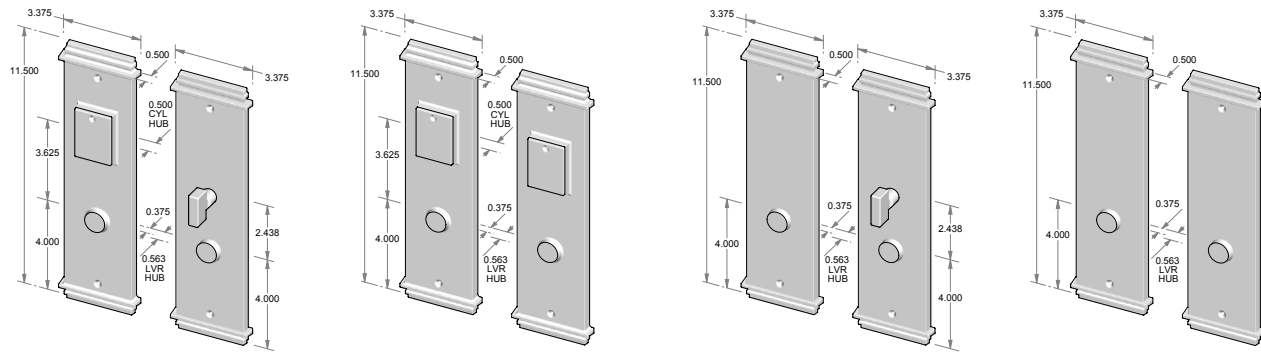

CS-441ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-441ML
 - Trim set only. No lock.

CS-441ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-441ML-DC
 - Trim set only. No lock.

CS-441ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-441ML-PF
 - Trim set only. No lock.

TS-441ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-441ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-441ML-KC (ext) EP-441ML-TPC (int)*
CS-441ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-441ML-KC (ext) EP-441ML-KC (int) Non-egress * **
CS-441ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-441 (ext) EP-441ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.688".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-441ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-441ML-KC (ext) EP-441ML-TPC (int)
TS-441ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-441ML-KC (ext) EP-441ML-KC (int)*
TS-441ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-441 (ext) EP-441ML-TPC (int)
TS-441ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-441D (ext) P-441D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.688".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



451 TRELLIS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

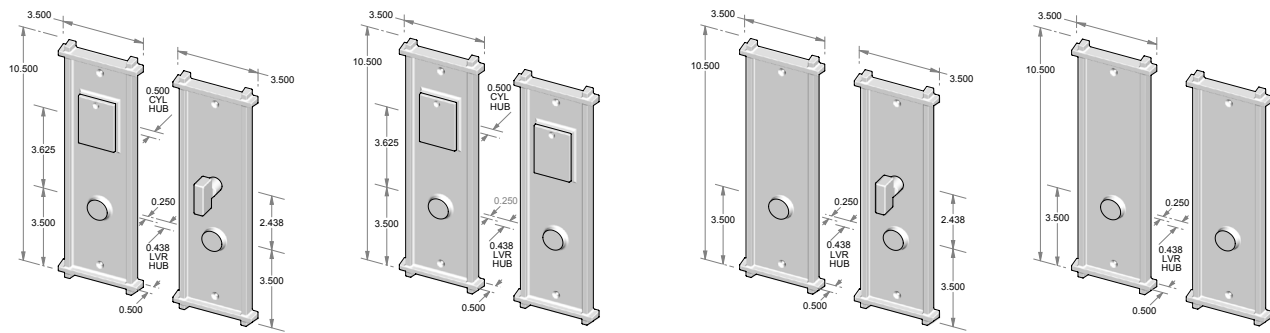

CS-451ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-451ML
 - Trim set only. No lock.

CS-451ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-451ML-DC
 - Trim set only. No lock.

CS-451ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-451ML-PF
 - Trim set only. No lock.

TS-451ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-451ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-451ML-KC (ext) EP-451ML-TPC (int)*
CS-451ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-451ML-KC (ext) EP-451ML-KC (int) Non-egress * **
CS-451ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-451(ext) EP-451ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-451ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-451ML-KC (ext) EP-451ML-TPC (int)
TS-451ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-451ML-KC (ext) EP-451ML-KC (int)*
TS-451ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-451 (ext) EP-451ML-TPC (int)
TS-451ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-451D (ext) P-451D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



461 DECO LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

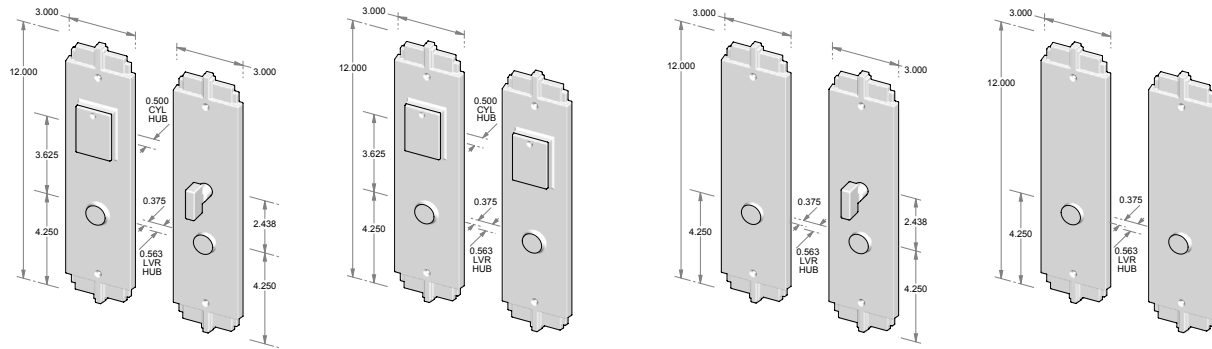

CS-461ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with TPC-761.
 OR
TS-461ML
 – Trim set only. No lock.

CS-461ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-461ML-DC
 – Trim set only. No lock.

CS-461ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-761.
 OR
TS-461ML-PF
 – Trim set only. No lock.

TS-461ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-461ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-461ML-KC (ext) EP-461ML-TPC (int)*
CS-461ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-461ML-KC (ext) EP-461ML-KC (int) Non-egress * **
CS-461ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-461 (ext) EP-461ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.688".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-461ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-461ML-KC (ext) EP-461ML-TPC (int)
TS-461ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-461ML-KC (ext) EP-461ML-KC (int)*
TS-461ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-461 (ext) EP-461ML-TPC (int)
TS-461ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-461D (ext) P-461D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.688".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1408 CORRUGATED LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

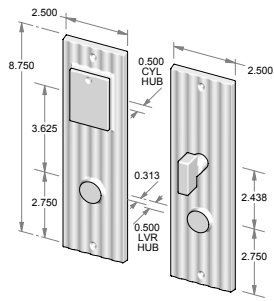


CS-1408ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-1408ML
 – Trim set only. No lock.

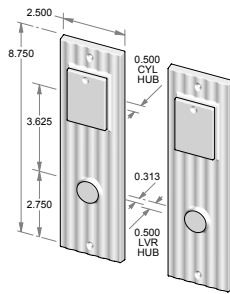

CS-1408ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-1408ML-DC
 – Trim set only. No lock.

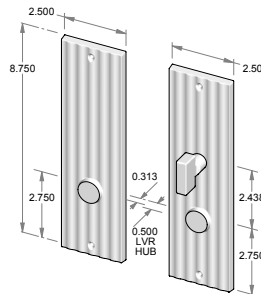

CS-1408ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-1408ML-PF
 – Trim set only. No lock.

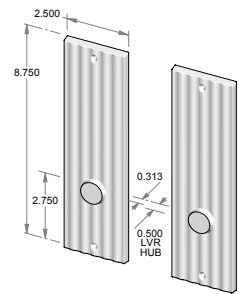

TS-1408ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1408ML-KC (ext) EP-1408ML-TPC (int)*
CS-1408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1408ML-KC (ext) EP-1408ML-KC (int) Non-egress * **
CS-1408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1408 (ext) EP-1408ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1408ML-KC (ext) EP-1408ML-TPC (int)
TS-1408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1408ML-KC (ext) EP-1408ML-KC (int)*
TS-1408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1408 (ext) EP-1408ML-TPC (int)
TS-1408ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1408D (ext) P-1408D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1410 CORRUGATED LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

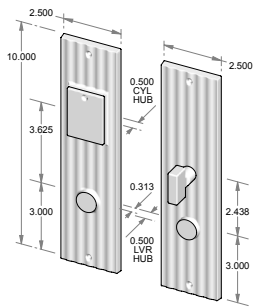


CS-1410ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-1410ML
 – Trim set only. No lock.

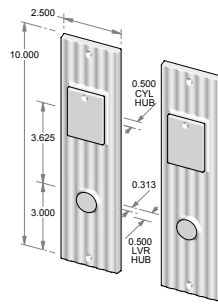

CS-1410ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-1410ML-DC
 – Trim set only. No lock.

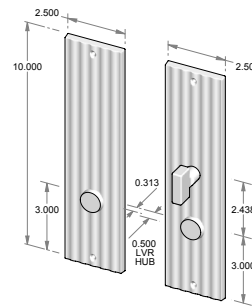

CS-1410ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-1410ML-PF
 – Trim set only. No lock.

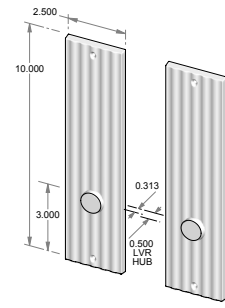

TS-1410ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1410ML-KC (ext) EP-1410ML-TPC (int)*
CS-1410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1410ML-KC (ext) EP-1410ML-KC (int) Non-egress * **
CS-1410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1410 (ext) EP-1410ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1410ML-KC (ext) EP-1410ML-TPC (int)
TS-1410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1410ML-KC (ext) EP-1410ML-KC (int)*
TS-1410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1410 (ext) EP-1410ML-TPC (int)
TS-1410ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1410D (ext) P-1410D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




1510 BANDBOX LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-1510ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-1510ML
 – Trim set only. No lock.

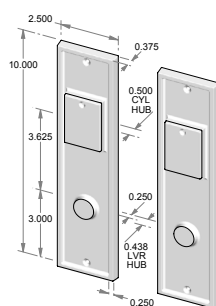

CS-1510ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-1510ML-DC
 – Trim set only. No lock.

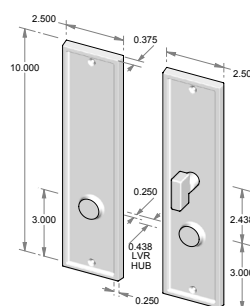

CS-1510ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-1510ML-PF
 – Trim set only. No lock.

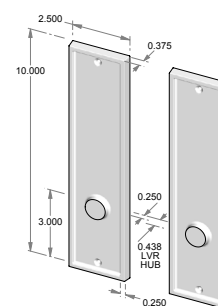

TS-1510ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1510ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1510ML-KC (ext) EP-1510ML-TPC (int)*
CS-1510ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1510ML-KC (ext) EP-1510ML-KC (int) Non-egress * **
CS-1510ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1510 (ext) EP-1510ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1510ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1510ML-KC (ext) EP-1510ML-TPC (int)
TS-1510ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1510ML-KC (ext) EP-1510ML-KC (int)*
TS-1510ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1510 (ext) EP-1510ML-TPC (int)
TS-1510ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1510D (ext) P-1510D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1511 BANDBOX LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

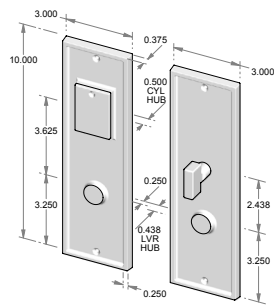


CS-1511ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-1511ML
 – Trim set only. No lock.

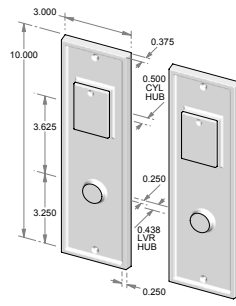

CS-1511ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-1511ML-DC
 – Trim set only. No lock.

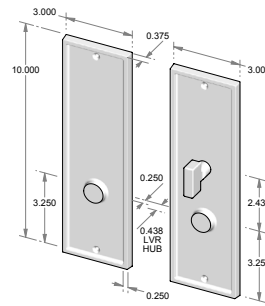

CS-1511ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-1511ML-PF
 – Trim set only. No lock.

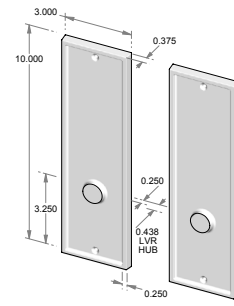

TS-1511ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1511ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1511ML-KC (ext) EP-1511ML-TPC (int)*
CS-1511ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1511ML-KC (ext) EP-1511ML-KC (int) Non-egress * **
CS-1511ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1511 (ext) EP-1511ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1511ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1511ML-KC (ext) EP-1511ML-TPC (int)
TS-1511ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1511ML-KC (ext) EP-1511ML-KC (int)*
TS-1511ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1511 (ext) EP-1511ML-TPC (int)
TS-1511ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1511D (ext) P-1511D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



1512 BANDBOX LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

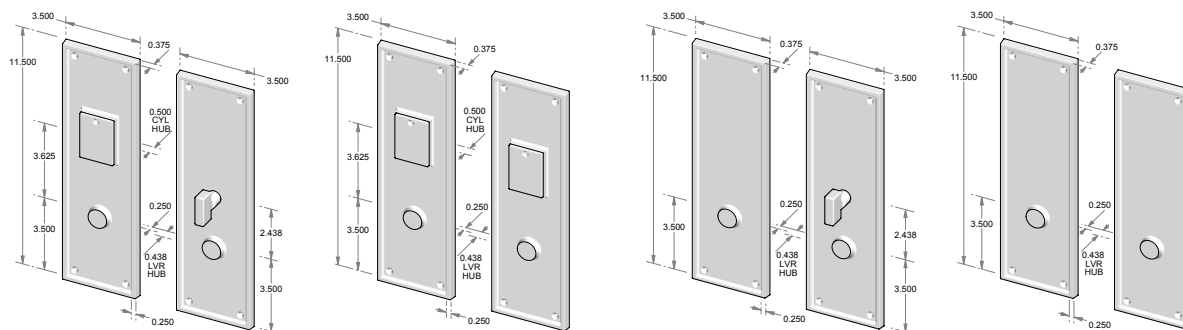

CS-1512ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-1512ML
 – Trim set only. No lock.

CS-1512ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-1512ML-DC
 – Trim set only. No lock.

CS-1512ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-1512ML-PF
 – Trim set only. No lock.

TS-1512ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1512ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-1512ML-KC (ext) EP-1512ML-TPC (int)*

CS-1512ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-1512ML-KC (ext) EP-1512ML-KC (int) Non-egress * **

CS-1512ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-1512 (ext) EP-1512ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1512ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-1512ML-KC (ext) EP-1512ML-TPC (int)

TS-1512ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-1512ML-KC (ext) EP-1512ML-KC (int)*

TS-1512ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-1512 (ext) EP-1512ML-TPC (int)

TS-1512ML-FD

Full dummy. Lever/knob x lever/knob ML dummy set. P-1512D (ext) P-1512D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1516 BANDBOX LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

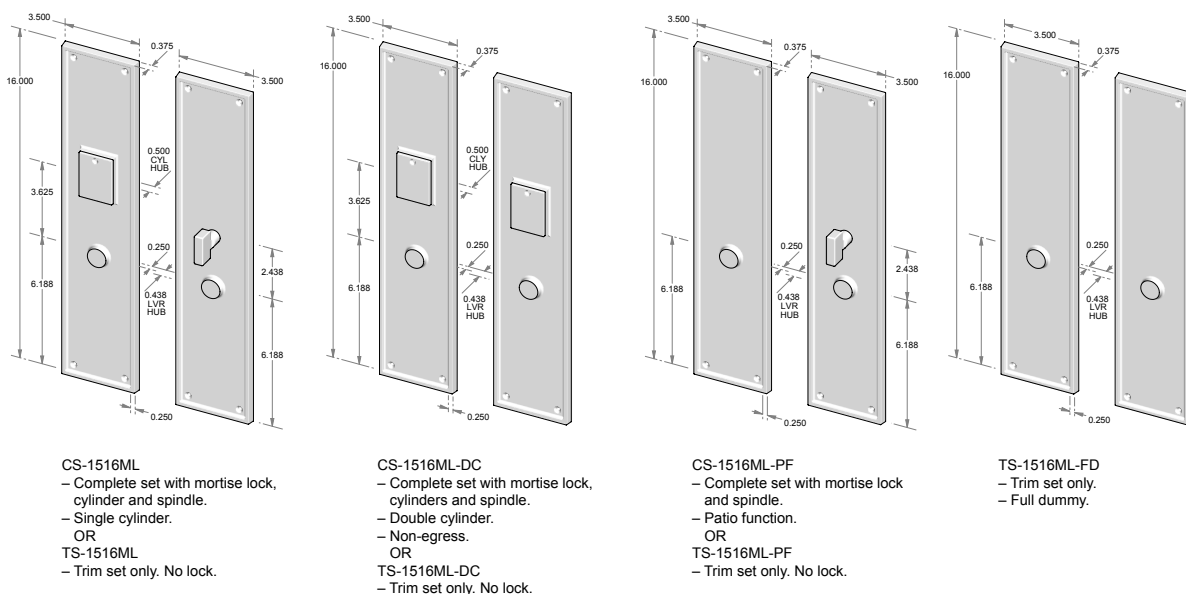

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1516ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1516ML-KC (ext) EP-1516ML-TPC (int)*
CS-1516ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1516ML-KC (ext) EP-1516ML-KC (int) Non-egress * **
CS-1516ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1516 (ext) EP-1516ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1516ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1516ML-KC (ext) EP-1516ML-TPC (int)
TS-1516ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1516ML-KC (ext) EP-1516ML-KC (int)*
TS-1516ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1516 (ext) EP-1516ML-TPC (int)
TS-1516ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1516D (ext) P-1516D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder hub height 0.500".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




1908 CORDUROY LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-1908ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-1900.
 OR
TS-1908ML
 - Trim set only. No lock.



CS-1908ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-1900.
 - Non-egress.
 OR
TS-1908ML-DC
 - Trim set only. No lock.

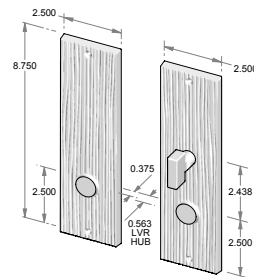

CS-1908ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-1908ML-PF
 - Trim set only. No lock.

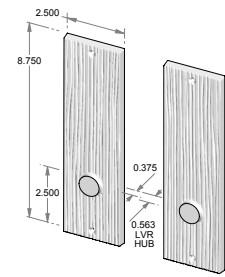

TS-1908ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1908ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1908ML-KC (ext) EP-1908ML-TPC (int)*
CS-1908ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1908ML-KC (ext) EP-1908ML-KC (int) Non-egress * **
CS-1908ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1908 (ext) EP-1908ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1908ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1908ML-KC (ext) EP-1908ML-TPC (int)
TS-1908ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1908ML-KC (ext) EP-1908ML-KC (int)*
TS-1908ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1908 (ext) EP-1908ML-TPC (int)
TS-1908ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1908D (ext) P-1908D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1910 CORDUROY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

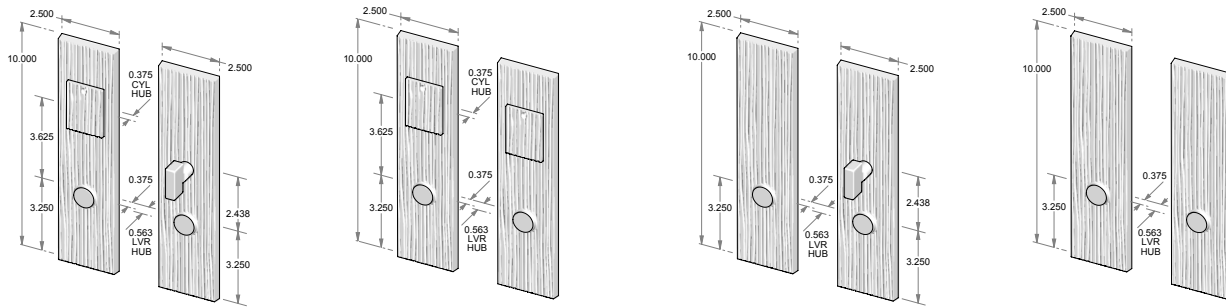

CS-1910ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-1900.
 OR
TS-1910ML
 - Trim set only. No lock.

CS-1910ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-1900.
 - Non-egress.
 OR
TS-1910ML-DC
 - Trim set only. No lock.

CS-1910ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-1910ML-PF
 - Trim set only. No lock.

TS-1910ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1910ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1910ML-KC (ext) EP-1910ML-TPC (int)*
CS-1910ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1910ML-KC (ext) EP-1910ML-KC (int) Non-egress * **
CS-1910ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1910 (ext) EP-1910ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1910ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1910ML-KC (ext) EP-1910ML-TPC (int)
TS-1910ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1910ML-KC (ext) EP-1910ML-KC (int)*
TS-1910ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1910 (ext) EP-1910ML-TPC (int)
TS-1910ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1910D (ext) P-1910D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1912 CORDUROY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

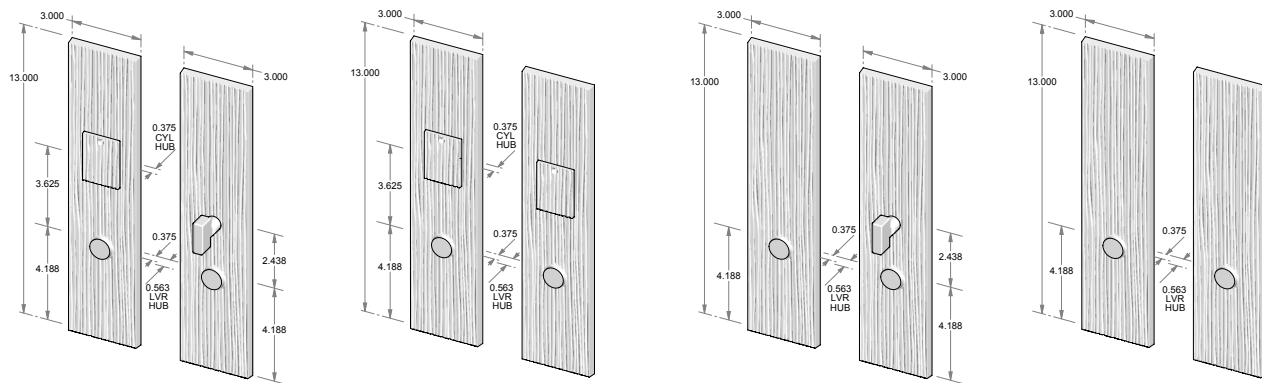

CS-1912ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-1900.
 OR
TS-1912ML
 - Trim set only. No lock.

CS-1912ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-1900.
 - Non-egress.
 OR
TS-1912ML-DC
 - Trim set only. No lock.

CS-1912ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-1912ML-PF
 - Trim set only. No lock.

TS-1912ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1912ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1912ML-KC (ext) EP-1912ML-TPC (int)*
CS-1912ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1912ML-KC (ext) EP-1912ML-KC (int) Non-egress * **
CS-1912ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1912 (ext) EP-1912ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1912ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1912ML-KC (ext) EP-1912ML-TPC (int)
TS-1912ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1912ML-KC (ext) EP-1912ML-KC (int)*
TS-1912ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1912 (ext) EP-1912ML-TPC (int)
TS-1912ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1912D (ext) P-1912D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1913 CORDUROY LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

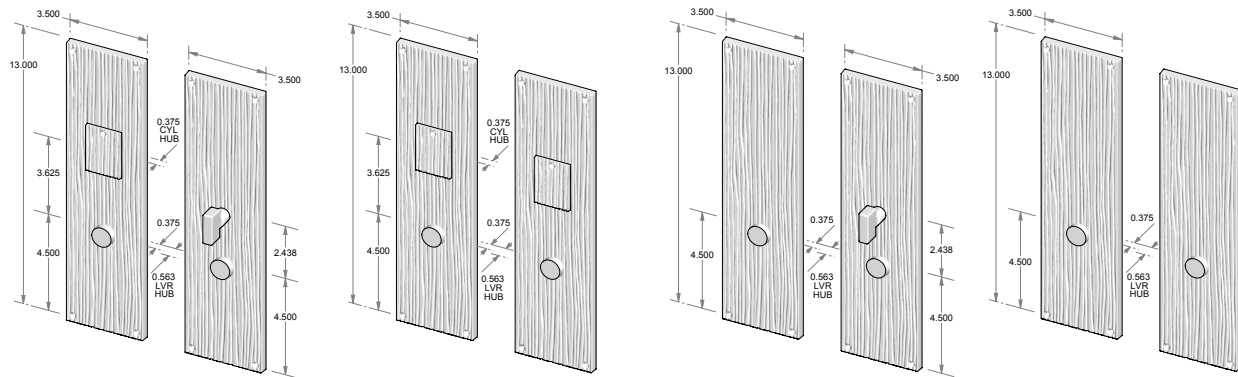

CS-1913ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-1900.
 OR
TS-1913ML
 - Trim set only. No lock.

CS-1913ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-1900.
 - Non-egress.
 OR
TS-1913ML-DC
 - Trim set only. No lock.

CS-1913ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-1913ML-PF
 - Trim set only. No lock.

TS-1913ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-1913ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1913ML-KC (ext) EP-1913ML-TPC (int)*
CS-1913ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1913ML-KC (ext) EP-1913ML-KC (int) Non-egress * **
CS-1913ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1913 (ext) EP-1913ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-1913ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-1913ML-KC (ext) EP-1913ML-TPC (int)
TS-1913ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-1913ML-KC (ext) EP-1913ML-KC (int)*
TS-1913ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-1913 (ext) EP-1913ML-TPC (int)
TS-1913ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-1913D (ext) P-1913D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




2107 MESA LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-2107ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-2107ML
 – Trim set only. No lock.

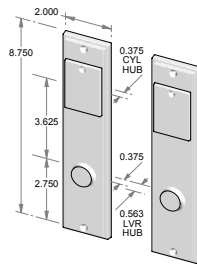

CS-2107ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-2107ML-DC
 – Trim set only. No lock.

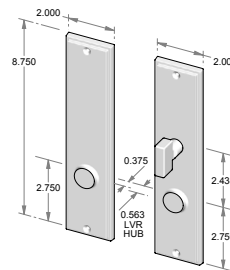

CS-2107ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-2107ML-PF
 – Trim set only. No lock.

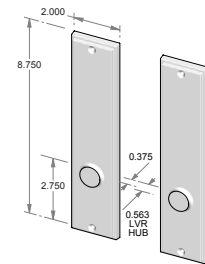

TS-2107ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2107ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2107ML-KC (ext) EP-2107ML-TPC (int)*
CS-2107ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2107ML-KC (ext) EP-2107ML-KC (int) Non-egress * **
CS-2107ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2107 (ext) EP-2107ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2107ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2107ML-KC (ext) EP-2107ML-TPC (int)
TS-2107ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2107ML-KC (ext) EP-2107ML-KC (int)*
TS-2107ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2107 (ext) EP-2107ML-TPC (int)
TS-2107ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2107D (ext) P-2107D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2108 MESA LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

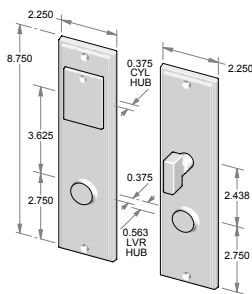


CS-2108ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-2108ML
 – Trim set only. No lock.



CS-2108ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-2108ML-DC
 – Trim set only. No lock.

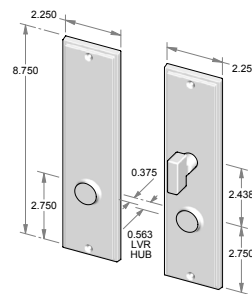

CS-2108ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-2108ML-PF
 – Trim set only. No lock.

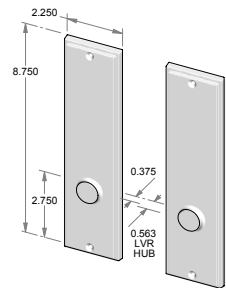

TS-2108ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2108ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2108ML-KC (ext) EP-2108ML-TPC (int)*
CS-2108ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2108ML-KC (ext) EP-2108ML-KC (int) Non-egress * **
CS-2108ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2108 (ext) EP-2108ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2108ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2108ML-KC (ext) EP-2108ML-TPC (int)
TS-2108ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2108ML-KC (ext) EP-2108ML-KC (int)*
TS-2108ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2108 (ext) EP-2108ML-TPC (int)
TS-2108ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2108D (ext) P-2108D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2110 MESA LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

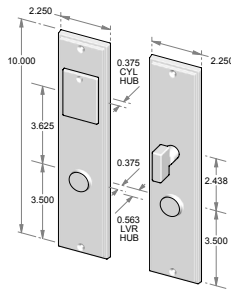


CS-2110ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-2110ML
 - Trim set only. No lock.



CS-2110ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 OR
TS-2110ML-DC
 - Trim set only. No lock.

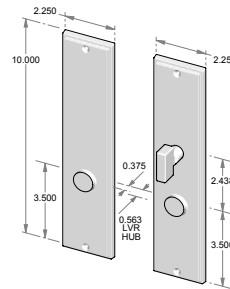

CS-2110ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-2110ML-PF
 - Trim set only. No lock.

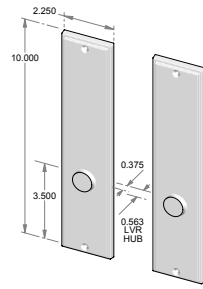

TS-2110ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2110ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2110ML-KC (ext) EP-2110ML-TPC (int)*
CS-2110ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2110ML-KC (ext) EP-2110ML-KC (int) Non-egress * **
CS-2110ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2110 (ext) EP-2110ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2110ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2110ML-KC (ext) EP-2110ML-TPC (int)
TS-2110ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2110ML-KC (ext) EP-2110ML-KC (int)*
TS-2110ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2110 (ext) EP-2110ML-TPC (int)
TS-2110ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2110D (ext) P-2110D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



2111 MESA LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

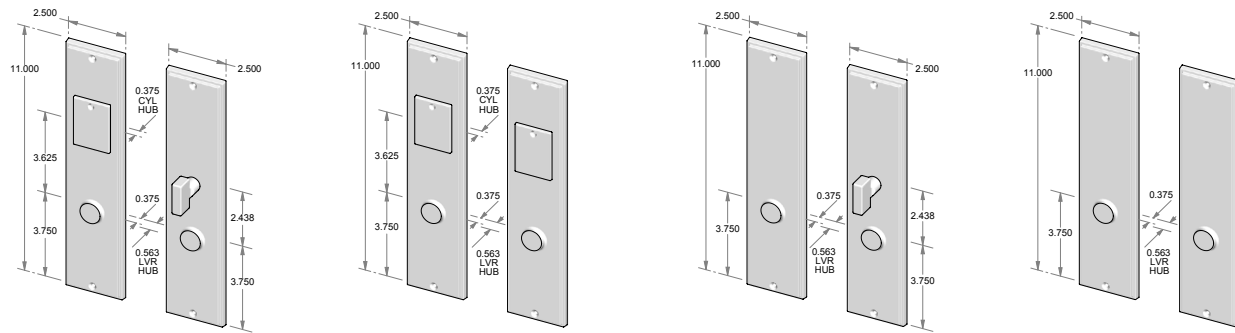

CS-2111ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-2111ML
 – Trim set only. No lock.

CS-2111ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-2111ML-DC
 – Trim set only. No lock.

CS-2111ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-2111ML-PF
 – Trim set only. No lock.

TS-2111ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2111ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2111ML-KC (ext) EP-2111ML-TPC (int)*
CS-2111ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2111ML-KC (ext) EP-2111ML-KC (int) Non-egress * **
CS-2111ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2111 (ext) EP-2111ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2111ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2111ML-KC (ext) EP-2111ML-TPC (int)
TS-2111ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2111ML-KC (ext) EP-2111ML-KC (int)*
TS-2111ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2111 (ext) EP-2111ML-TPC (int)
TS-2111ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2111D (ext) P-2111D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2208 BURLAP LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

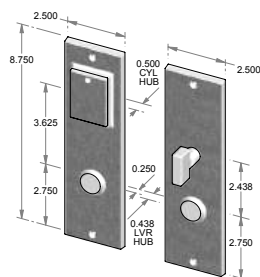


CS-2208ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
OR
TS-2208ML
– Trim set only. No lock.



CS-2208ML-DC
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Non-egress.
– Shown with KC-700.
OR
TS-2208ML-DC
– Trim set only. No lock.

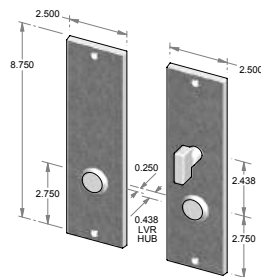

CS-2208ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-2208ML-PF
– Trim set only. No lock.

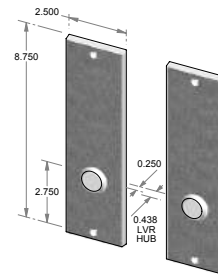

TS-2208ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2208ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2208ML-KC (ext) EP-2208ML-TPC (int)*
CS-2208ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2208ML-KC-700 (ext) EP-2208ML-KC-700 (int) Non-egress * **
CS-2208ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2208 (ext) EP-2208ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2208ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2208ML-KC (ext) EP-2208ML-TPC (int)
TS-2208ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2208ML-KC-700 (ext) EP-2208ML-KC-700 (int)*
TS-2208ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2208 (ext) EP-2208ML-TPC (int)
TS-2208ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2208D (ext) P-2208D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Specify lever/knob design where applicable.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



2210 BURLAP LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

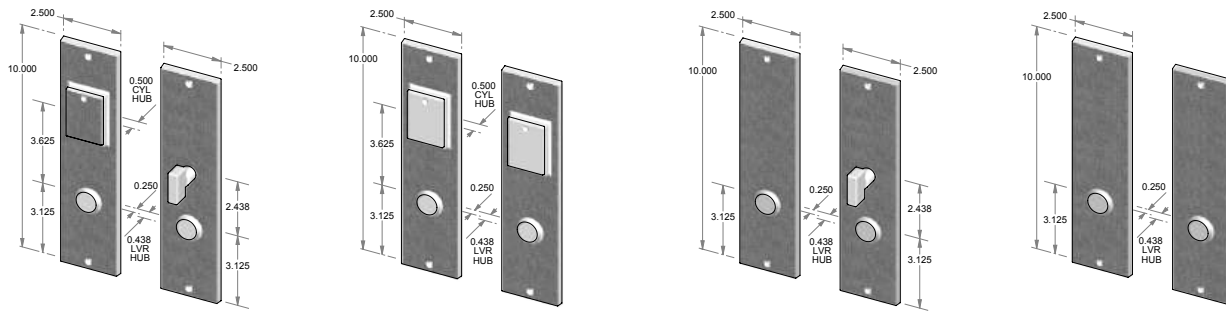

CS-2210ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-2210ML
 - Trim set only. No lock.

CS-2210ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Non-egress.
 - Shown with KC-700.
 OR
TS-2210ML-DC
 - Trim set only. No lock.

CS-2210ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-2210ML-PF
 - Trim set only. No lock.

TS-2210ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2210ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2210ML-KC (ext) EP-2210ML-TPC (int)*
CS-2210ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2210ML-KC-700 (ext) EP-2210ML-KC-700 (int) Non-egress * **
CS-2210ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2210 (ext) EP-2210ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2210ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2210ML-KC (ext) EP-2210ML-TPC (int)
TS-2210ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2210ML-KC-700 (ext) EP-2210ML-KC-700 (int)*
TS-2210ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2210 (ext) EP-2210ML-TPC (int)
TS-2210ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2210D (ext) P-2210D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Specify lever/knob design where applicable.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2308 GEM LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

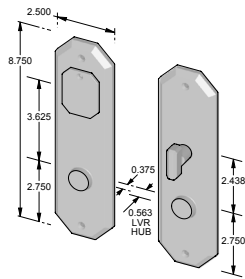


CS-2308ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-2308ML
 - Trim set only. No lock.



CS-2308ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
TS-2308ML-DC-NKC
 - Trim set only. No lock.

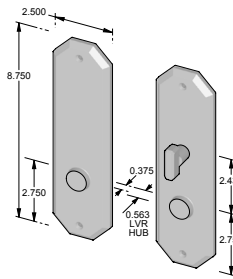

CS-2308ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-2308ML-PF
 - Trim set only. No lock.

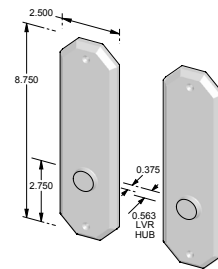

TS-2308ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2308ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2308ML-KC (ext) EP-2308ML-TPC (int)*
CS-2308ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2308ML-NKC (ext) EP-2308ML-NKC (int) Non-egress * **
CS-2308ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2308 (ext) EP-2308ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2308ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2308ML-KC (ext) EP-2308ML-TPC (int)
TS-2308ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2308ML-NKC (ext) EP-2308ML-NKC (int)*
TS-2308ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2308 (ext) EP-2308ML-TPC (int)
TS-2308ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2308D (ext) P-2308D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F2308 GEM LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

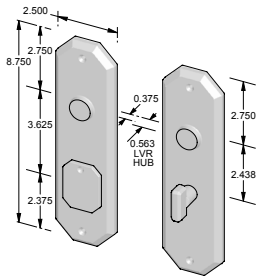


CS-F2308ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F2308ML
 – Trim set only. No lock.



CS-F2308ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F2308ML-DC-NKC
 – Trim set only. No lock.

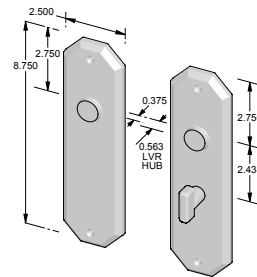

CS-F2308ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F2308ML-PF
 – Trim set only. No lock.

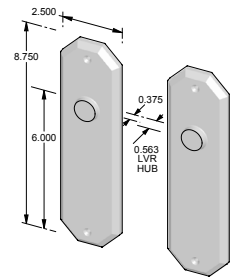

TS-F2308ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F2308ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F2308ML-KC (ext) EP-F2308ML-TPC (int)*
CS-F2308ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F2308ML-NKC (ext) EP-F2308ML-NKC (int) Non-egress * **
CS-F2308ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F2308 (ext) EP-F2308ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F2308ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F2308ML-KC (ext) EP-F2308ML-TPC (int)
TS-F2308ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F2308ML-NKC (ext) EP-F2308ML-NKC (int)*
TS-F2308ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F2308 (ext) EP-F2308ML-TPC (int)
TS-F2308ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-F2308D (ext) P-F2308D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



2309 GEM LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

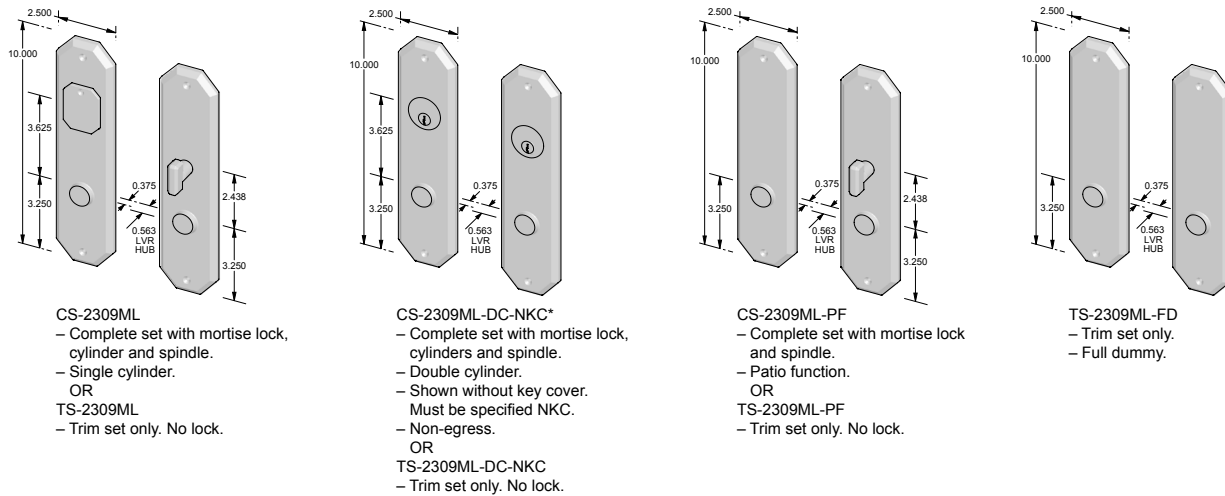

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2309ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2309ML-KC (ext) EP-2309ML-TPC (int)*
CS-2309ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2309ML-NKC (ext) EP-2309ML-NKC (int) Non-egress * **
CS-2309ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2309 (ext) EP-2309ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2309ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2309ML-KC (ext) EP-2309ML-TPC (int)
TS-2309ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2309ML-NKC (ext) EP-2309ML-NKC (int)*
TS-2309ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2309 (ext) EP-2309ML-TPC (int)
TS-2309ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2309D (ext) P-2309D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F2309 GEM LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

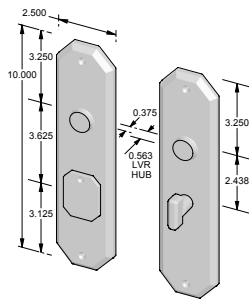


CS-F2309ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-F2309ML
 - Trim set only. No lock.



CS-F2309ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
TS-F2309ML-DC-NKC
 - Trim set only. No lock.

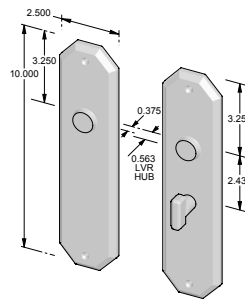

CS-F2309ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-F2309ML-PF
 - Trim set only. No lock.

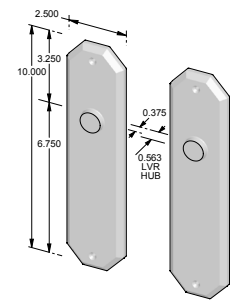

TS-F2309ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F2309ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F2309ML-KC (ext) EP-F2309ML-TPC (int)*
CS-F2309ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F2309ML-NKC (ext) EP-F2309ML-NKC (int) Non-egress * **
CS-F2309ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F2309 (ext) EP-F2309ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F2309ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F2309ML-KC (ext) EP-F2309ML-TPC (int)
TS-F2309ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F2309ML-NKC (ext) EP-F2309ML-NKC (int)*
TS-F2309ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F2309 (ext) EP-F2309ML-TPC (int)
TS-F2309ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-F2309D (ext) P-F2309D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




RP-N925 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-RP-N925ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with CC-400ML-C.
 OR
TS-RP-N925ML
 - Trim set only. No lock.



CS-RP-N925ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with CC-400ML-C.
 - Non-egress.
 OR
TS-RP-N925ML-DC
 - Trim set only. No lock.



CS-RP-N925ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-RP-N925ML-PF
 - Trim set only. No lock.



TS-RP-N925ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/RP-9158ML-TPC (int)*
CS-RP-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/CC-400ML-C (int) Non-egress * **
CS-RP-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 (ext) RP-N925 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/RP-9158ML-TPC (int)
TS-RP-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/CC-400ML-C (int)*
TS-RP-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 (ext) RP-N925 w/RP-9158ML-TPC (int)
TS-RP-N925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-N925D (ext) RP-N925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP-N925 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-F-RP-N925ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with CC-400ML-C.
 OR
TS-F-RP-N925ML
 – Trim set only. No lock.



CS-F-RP-N925ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with CC-400ML-C.
 – Non-egress.
 OR
TS-F-RP-N925ML-DC
 – Trim set only. No lock.



CS-F-RP-N925ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F-RP-N925ML-PF
 – Trim set only. No lock.



TS-F-RP-N925ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/RP-9158ML-TPC (int)*
CS-F-RP-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/CC-400ML-C (int) Non-egress * **
CS-F-RP-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 (ext) RP-N925 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/RP-9158ML-TPC (int)
TS-F-RP-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 w/ CC-400ML-C (ext) RP-N925 w/CC-400ML-C (int)*
TS-F-RP-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N925 (ext) RP-N925 w/RP-9158ML-TPC (int)
TS-F-RP-N925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-N925D (ext) RP-N925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N925 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

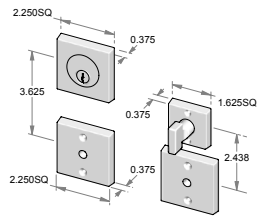


- CS-N925ML**
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 9503ML-C.
 OR
TS-N925ML
 – Trim set only. No lock.



- CS-N925ML-DC**
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 9503ML-C.
 – Non-egress.
 OR
TS-N925ML-DC
 – Trim set only. No lock.



- CS-N925ML-PF**
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-N925ML-PF
 – Trim set only. No lock.



- TS-N925ML-FD**
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9158ML-TPC (int)*
CS-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9502ML-C (int) Non-egress * **
CS-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N925 (ext) P-N925 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9158ML-TPC (int)
TS-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9502ML-C (int)*
TS-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N925 (ext) P-N925 w/9158ML-TPC (int)
TS-N925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-N925D (ext) P-N925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-N925 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

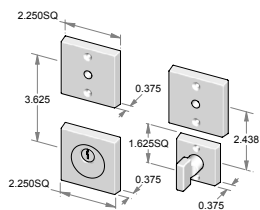


CS-F-N925ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 9503ML-C.
 OR
 TS-F-N925ML
 – Trim set only. No lock.



CS-F-N925ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 9503ML-C.
 – Non-egress.
 OR
 TS-F-N925ML-DC
 – Trim set only. No lock.



CS-F-N925ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
 TS-F-N925ML-PF
 – Trim set only. No lock.



TS-F-N925ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9158ML-TPC (int)*
CS-F-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9502ML-C (int) Non-egress * **
CS-F-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N925 (ext) P-N925 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N925ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9158ML-TPC (int)
TS-F-N925ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N925 w/9503ML-C (ext) P-N925 w/9502ML-C (int)*
TS-F-N925ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N925 (ext) P-N925 w/9158ML-TPC (int)
TS-F-N925ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-N925D (ext) P-N925D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




RP-N926 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-RP-N926ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 9507ML-C.
 OR
TS-RP-N926ML
 – Trim set only. No lock.



CS-RP-N926ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 9507ML-C.
 – Non-egress.
 OR
TS-RP-N926ML-DC
 – Trim set only. No lock.



CS-RP-N926ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-RP-N926ML-PF
 – Trim set only. No lock.



TS-RP-N926ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/RP-9158ML-TPC (int)*
CS-RP-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/9504ML-C (int) Non-egress * **
CS-RP-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 (ext) RP-N926 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/RP-9158ML-TPC (int)
TS-RP-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/9504ML-C (int)*
TS-RP-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 (ext) RP-N926 w/RP-9158ML-TPC (int)
TS-RP-N926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-N926D (ext) RP-N926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP-N926 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

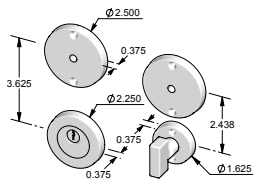


CS-F-RP-N926ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with 9507ML-C.
 OR
 TS-F-RP-N926ML
 - Trim set only. No lock.



CS-F-RP-N926ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with 9507ML-C.
 - Non-egress.
 OR
 TS-F-RP-N926ML-DC
 - Trim set only. No lock.



CS-F-RP-N926ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
 TS-F-RP-N926ML-PF
 - Trim set only. No lock.



TS-F-RP-N926ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/RP-9158ML-TPC (int)*
CS-F-RP-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/9504ML-C (int) Non-egress * **
CS-F-RP-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 (ext) RP-N926 w/RP-9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/RP-9158ML-TPC (int)
TS-F-RP-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 w/9507ML-C (ext) RP-N926 w/9504ML-C (int)*
TS-F-RP-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-N926 (ext) RP-N926 w/RP-9158ML-TPC (int)
TS-F-RP-N926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-N926D (ext) RP-N926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N926 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

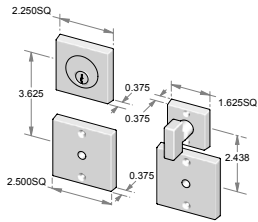


CS-N926ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with 9503ML-C.
 OR
TS-N926ML
 – Trim set only. No lock.



CS-N926ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with 9503ML-C.
 – Non-egress.
 OR
TS-N926ML-DC
 – Trim set only. No lock.

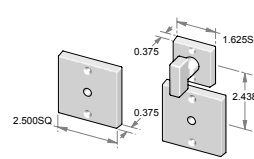

CS-N926ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-N926ML-PF
 – Trim set only. No lock.



TS-N926ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/9503ML-C (ext) P-N926 w/9158ML-TPC (int)*
CS-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/9503ML-C (ext) P-N926 w/9503ML-C (int) Non-egress * **
CS-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N926 (ext) P-N926 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/9503ML-C (ext) P-N926 w/9158ML-TPC (int)
TS-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/9503ML-C (ext) P-N926 w/9503ML-C (int)*
TS-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N926 (ext) P-N926 w/9158ML-TPC (int)
TS-N926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-N926D (ext) P-N926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-N926 NOVUS LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

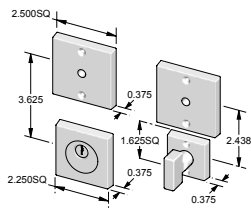


CS-F-N926ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with CC-405ML-C.
 OR
TS-F-N926ML
 – Trim set only. No lock.



CS-F-N926ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with CC-405ML-C.
 – Non-egress.
 OR
TS-F-N926ML-DC
 – Trim set only. No lock.



CS-F-N926ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F-N926ML-PF
 – Trim set only. No lock.



TS-F-N926ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/ CC-9503ML-C (ext) P-N926 w/9158ML-TPC (int)*
CS-F-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/ CC-9503ML-C (ext) P-N926 w/CC-9503ML-C (int) Non-egress * **
CS-F-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N926 (ext) P-N926 w/9158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10SF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N926ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/ CC-9503ML-C (ext) P-N926 w/9158ML-TPC (int)
TS-F-N926ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-N926 w/ CC-9503ML-C (ext) P-N926 w/CC-9503ML-C (int)*
TS-F-N926ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-N926 (ext) P-N926 w/9158ML-TPC (int)
TS-F-N926ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-N926D (ext) P-N926D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N950 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

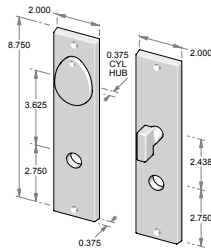


CS-N950ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
OR
TS-N950ML
– Trim set only. No lock.



CS-N950ML-DC-NKC*
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Shown without key cover.
– Must be specified NKC.
– Non-egress.
OR
TS-N950ML-DC-NKC
– Trim set only. No lock.

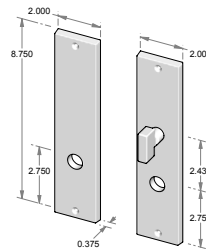

CS-N950ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-N950ML-PF
– Trim set only. No lock.

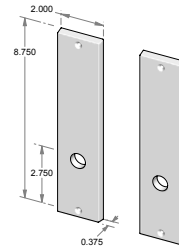

TS-N950ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N950ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N950ML-KC (ext) EP-N950ML-TPC (int)*
CS-N950ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N950ML-NKC (ext) EP-N950ML-NKC (int) Non-egress * **
CS-N950ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N950 (ext) EP-N950ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N950ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N950ML-KC (ext) EP-N950ML-TPC (int)
TS-N950ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N950ML-NKC (ext) EP-N950ML-NKC (int)*
TS-N950ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N950 (ext) EP-N950ML-TPC (int)
TS-N950ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-N950D (ext) P-N950D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




F-N950 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.




CS-F-N950ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
OR
TS-F-N950ML
– Trim set only. No lock.



CS-F-N950ML-DC-NKC*
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Shown without key cover. Must be specified NKC.
– Non-egress.
OR
TS-F-N950ML-DC-NKC
– Trim set only. No lock.



CS-F-N950ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-F-N950ML-PF
– Trim set only. No lock.



TS-F-N950ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N950ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N950ML-KC (ext)
EP-F-N950ML-TPC (int)*

CS-F-N950ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N950ML-NKC (ext)
EP-F-N950ML-NKC (int) Non-egress * **

CS-F-N950ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-F-N950 (ext)
EP-F-N950ML-TPC (int)

Accurate 9100USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10NF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N950ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N950ML-KC (ext)
EP-F-N950ML-TPC (int)

TS-F-N950ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N950ML-NKC (ext)
EP-F-N950ML-NKC (int)*

TS-F-N950ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-F-N950 (ext)
EP-F-N950ML-TPC (int)

TS-F-N950ML-FD

Full dummy. Lever/knob x lever/knob ML dummy set. P-F-N950D (ext)
P-F-N950D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N951 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

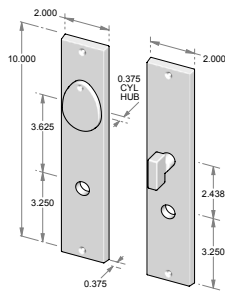


CS-N951ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-N951ML
 – Trim set only. No lock.



CS-N951ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-N951ML-DC-NKC
 – Trim set only. No lock.

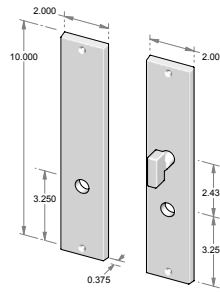

CS-N951ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-N951ML-PF
 – Trim set only. No lock.

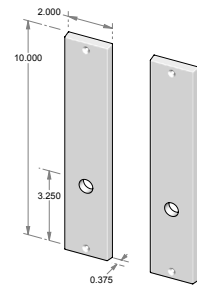

TS-N951ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N951ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N951ML-KC (ext) EP-N951ML-TPC (int)*
CS-N951ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N951ML-NKC (ext) EP-N951ML-NKC (int) Non-egress * **
CS-N951ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N951ML (ext) EP-N951ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N951ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N951ML-KC (ext) EP-N951ML-TPC (int)
TS-N951ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N951ML-NKC (ext) EP-N951ML-NKC (int)*
TS-N951ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N951ML (ext) EP-N951ML-TPC (int)
TS-N951ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-N951ML-D (ext) P-N951ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F-N951 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

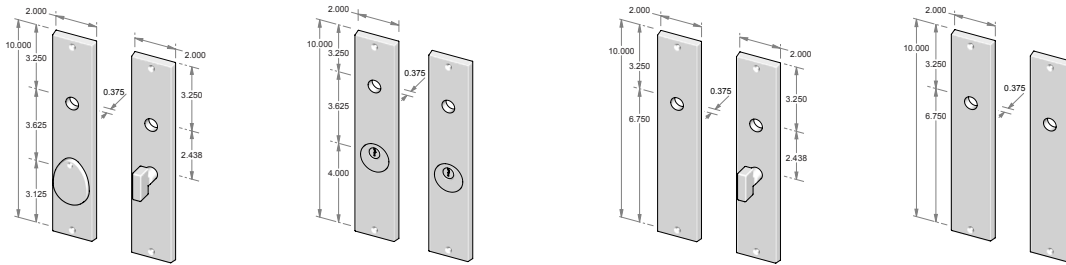

CS-F-N951ML

– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.

OR

TS-F-N951ML

– Trim set only. No lock.

CS-F-N951ML-DC-NKC*

– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.

– Shown without key cover.

Must be specified NKC.

– Non-egress.

OR

TS-F-N951ML-DC-NKC

– Trim set only. No lock.

CS-F-N951ML-PF

– Complete set with mortise lock and spindle.
– Patio function.

OR

TS-F-N951ML-PF

– Trim set only. No lock.

TS-F-N951ML-FD

– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N951ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N951ML-KC (ext)
EP-F-N951ML-TPC (int)*

CS-F-N951ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N951ML-NKC (ext)
EP-F-N951ML-NKC (int) Non-egress * **

CS-F-N951ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-F-N951ML (ext)
EP-F-N951ML-TPC (int)

Accurate 9100USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10NF.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N951ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N951ML-KC (ext)
EP-F-N951ML-TPC (int)

TS-F-N951ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N951ML-NKC (ext)
EP-F-N951ML-NKC (int)*

TS-F-N951ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-F-N951ML (ext)
EP-F-N951ML-TPC (int)

TS-F-N951ML-FD

Full dummy. Lever/knob x lever/knob ML dummy set. P-F-N951ML-D (ext)
P-F-N951ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N952 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

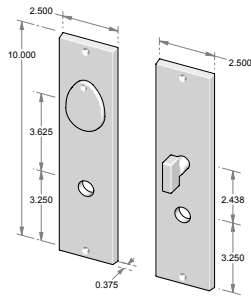


CS-N952ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-N952ML
 – Trim set only. No lock.



CS-N952ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover.
 – Must be specified NKC.
 – Non-egress.
 OR
TS-N952ML-DC-NKC
 – Trim set only. No lock.

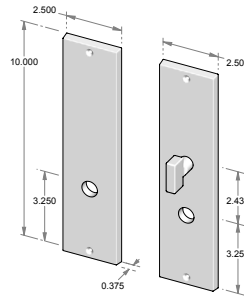

CS-N952ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-N952ML-PF
 – Trim set only. No lock.

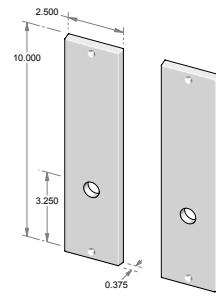

TS-N952ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N952ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N952ML-KC (ext) EP-N952ML-TPC (int)*
CS-N952ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N952ML-NKC (ext) EP-N952ML-NKC (int) Non-egress * **
CS-N952ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N952ML (ext) EP-N952ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N952ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N952ML-KC (ext) EP-N952ML-TPC (int)
TS-N952ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N952ML-NKC (ext) EP-N952ML-NKC (int)*
TS-N952ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N952ML (ext) EP-N952ML-TPC (int)
TS-N952ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-N952ML-D (ext) P-N952ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Total cylinder height 0.375".


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



F-N952 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

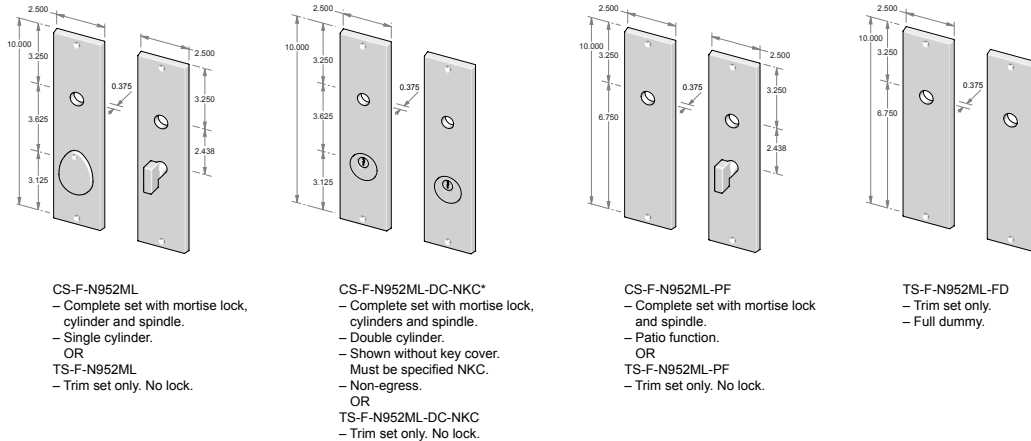

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N952ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N952ML-KC (ext) EP-F-N952ML-TPC (int)*
CS-F-N952ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N952ML-NKC (ext) EP-F-N952ML-NKC (int) Non-egress * **
CS-F-N952ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N952ML (ext) EP-F-N952ML-TPC (int)

Accurate 9100USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N952ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N952ML-KC (ext) EP-F-N952ML-TPC (int)
TS-F-N952ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N952ML-NKC (ext) EP-F-N952ML-NKC (int)*
TS-F-N952ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N952ML (ext) EP-F-N952ML-TPC (int)
TS-F-N952ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-F-N952ML-D (ext) P-F-N952ML-D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N953 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

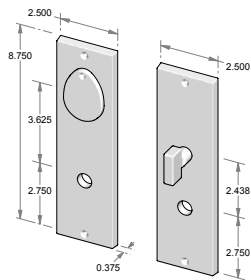


CS-N953ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
 TS-N953ML
 - Trim set only. No lock.



CS-N953ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
 TS-N953ML-DC-NKC
 - Trim set only. No lock.

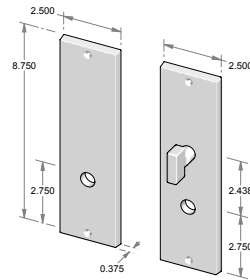

CS-N953ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
 TS-N953ML-PF
 - Trim set only. No lock.

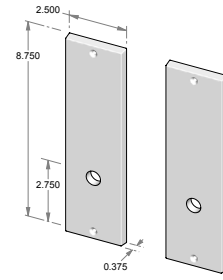

TS-N953ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N953ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N953ML-KC (ext) EP-N953ML-TPC (int)*
CS-N953ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N953ML-NKC (ext) EP-N953ML-NKC (int) Non-egress * **
CS-N953ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N953 (ext) EP-N953ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N953ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N953ML-KC (ext) EP-N953ML-TPC (int)
TS-N953ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N953ML-NKC (ext) EP-N953ML-NKC (int)*
TS-N953ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N953 (ext) EP-N953ML-TPC (int)
TS-N953ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-N953D (ext) P-N953D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F-N953 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

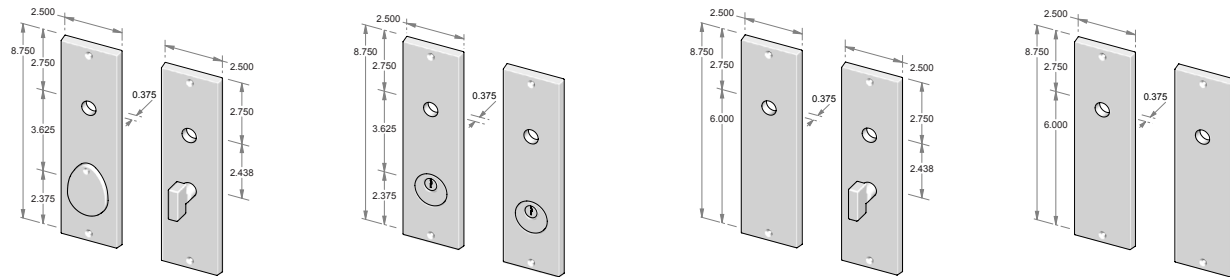

CS-F-N953ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
 TS-F-N953ML
 - Trim set only. No lock.

CS-F-N953ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
 TS-F-N953ML-DC-NKC
 - Trim set only. No lock.

CS-F-N953ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
 TS-F-N953ML-PF
 - Trim set only. No lock.

TS-F-N953ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N953ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N953ML-KC (ext) EP-F-N953ML-TPC (int)*
CS-F-N953ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N953ML-NKC (ext) EP-F-N953ML-NKC (int) Non-egress * **
CS-F-N953ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N953 (ext) EP-F-N953ML-TPC (int)

Accurate 9100USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N953ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N953ML-KC (ext) EP-F-N953ML-TPC (int)
TS-F-N953ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N953ML-NKC (ext) EP-F-N953ML-NKC (int)*
TS-F-N953ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N953 (ext) EP-F-N953ML-TPC (int)
TS-F-N953ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-F-N953D (ext) P-F-N953D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



N955 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

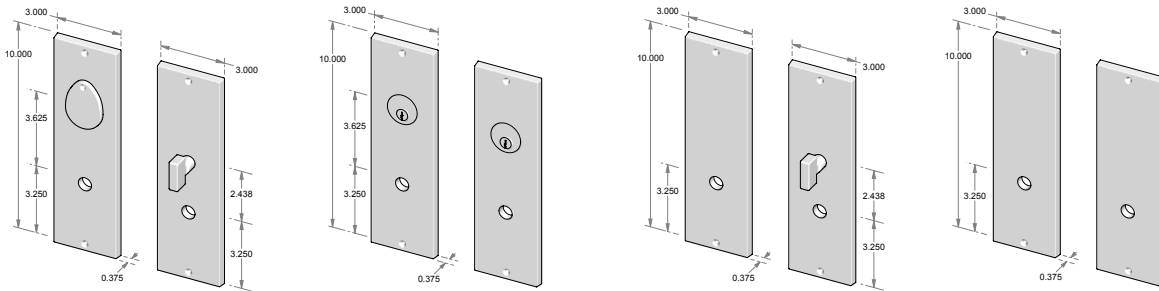

CS-N955ML
- Complete set with mortise lock, cylinder and spindle.
- Single cylinder.
OR
TS-N955ML
- Trim set only. No lock.

CS-N955ML-DC-NKC*
- Complete set with mortise lock, cylinders and spindle.
- Double cylinder.
- Shown without key cover. Must be specified NKC.
- Non-egress.
OR
TS-N955ML-DC-NKC
- Trim set only. No lock.

CS-N955ML-PF
- Complete set with mortise lock and spindle.
- Patio function.
OR
TS-N955ML-PF
- Trim set only. No lock.

TS-N955ML-FD
- Trim set only.
- Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N955ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N955ML-KC (ext) EP-N955ML-TPC (int)*
CS-N955ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N955ML-NKC (ext) EP-N955ML-NKC (int) Non-egress * **
CS-N955ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N955 (ext) EP-N955ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N955ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-N955ML-KC (ext) EP-N955ML-TPC (int)
TS-N955ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-N955ML-NKC (ext) EP-N955ML-NKC (int)*
TS-N955ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-N955 (ext) EP-N955ML-TPC (int)
TS-N955ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-N955D (ext) P-N955D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F-N955 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

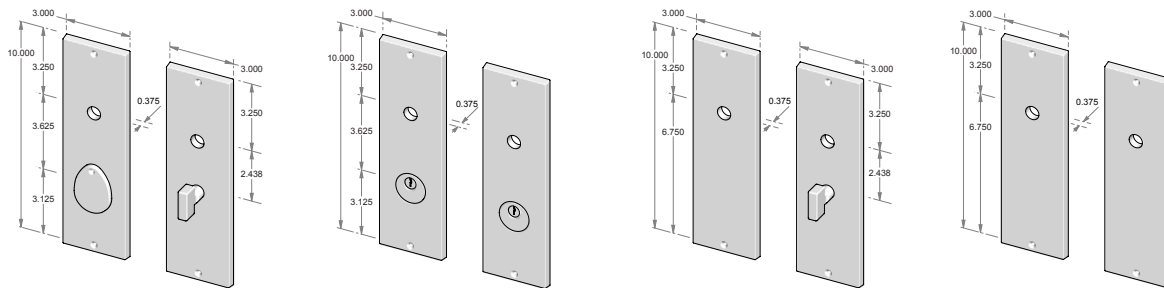

CS-F-N955ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-F-N955ML
 – Trim set only. No lock.

CS-F-N955ML-DC-NKC*
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown without key cover. Must be specified NKC.
 – Non-egress.
 OR
TS-F-N955ML-DC-NKC
 – Trim set only. No lock.

CS-F-N955ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-F-N955ML-PF
 – Trim set only. No lock.

TS-F-N955ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N955ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N955ML-KC (ext) EP-F-N955ML-TPC (int)*
CS-F-N955ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N955ML-NKC (ext) EP-F-N955ML-NKC (int) Non-egress * **
CS-F-N955ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N955 (ext) EP-F-N955ML-TPC (int)

Accurate 9100USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N955ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N955ML-KC (ext) EP-F-N955ML-TPC (int)
TS-F-N955ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N955ML-NKC (ext) EP-F-N955ML-NKC (int)*
TS-F-N955ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N955 (ext) EP-F-N955ML-TPC (int)
TS-F-N955ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-F-N955D (ext) P-F-N955D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



N957 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

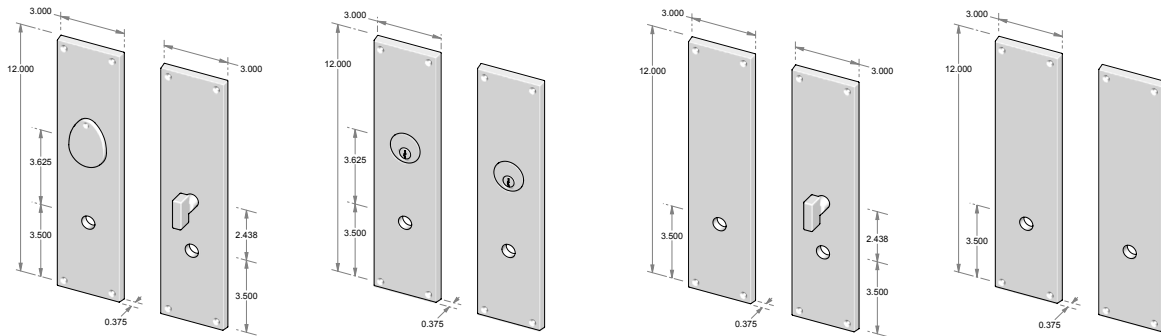

CS-N957ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-N957ML
 - Trim set only. No lock.

CS-N957ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR
TS-N957ML-DC-NKC
 - Trim set only. No lock.

CS-N957ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-N957ML-PF
 - Trim set only. No lock.

TS-N957ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-N957ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-N957ML-KC (ext)
 EP-N957ML-TPC (int)*

CS-N957ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-N957ML-NKC (ext)
 EP-N957ML-NKC (int) Non-egress * **

CS-N957ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-N957 (ext)
 EP-N957ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-N957ML

Single cylinder. Lever/knob x lever/knob ML entry set. EP-N957ML-KC (ext)
 EP-N957ML-TPC (int)

TS-N957ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. EP-N957ML-NKC (ext)
 EP-N957ML-NKC (int)*

TS-N957ML-PF

Patio function. Lever/knob x lever/knob ML entry set. P-N957 (ext)
 EP-N957ML-TPC (int)

TS-N957ML-FD

Full dummy. Lever/knob x lever/knob ML dummy set. P-N957D (ext) P-N957D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



F-N957 NOVUS LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

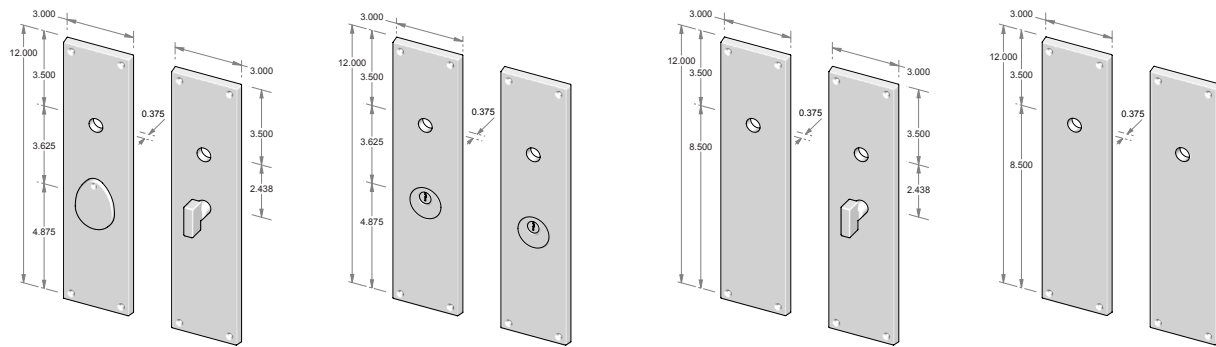

CS-F-N957ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 OR
TS-F-N957ML
 - Trim set only. No lock.

CS-F-N957ML-DC-NKC*
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown without key cover. Must be specified NKC.
 - Non-egress.
 OR

CS-F-N957ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-F-N957ML-PF
 - Trim set only. No lock.

TS-F-N957ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-N957ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N957ML-KC (ext) EP-F-N957ML-TPC (int)*
CS-F-N957ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N957ML-NKC (ext) EP-F-N957ML-NKC (int) Non-egress * **
CS-F-N957ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N957 (ext) EP-F-N957ML-TPC (int)

Accurate 910USD Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10F.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder height 0.375".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-N957ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-F-N957ML-KC (ext) EP-F-N957ML-TPC (int)
TS-F-N957ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-F-N957ML-NKC (ext) EP-F-N957ML-NKC (int)*
TS-F-N957ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-F-N957 (ext) EP-F-N957ML-TPC (int)
TS-F-N957ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-F-N957D (ext) P-F-N957D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder height 0.375".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2408 RIDGE BURLAP LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

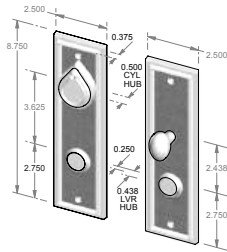


CS-2408ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-2408ML
 – Trim set only. No lock.

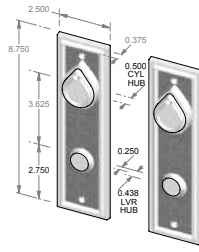

CS-2408ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 – Non-egress.
 OR
TS-2408ML-DC
 – Trim set only. No lock.

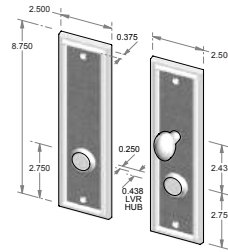

CS-2408ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-2408ML-PF
 – Trim set only. No lock.

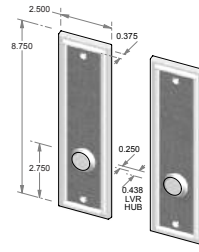

TS-2408ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2408ML-KC (ext) EP-2408ML-TPC (int)*
CS-2408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2408ML-KC (ext) EP-2408ML-KC (int) Non-egress * **
CS-2408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2408 (ext) EP-2408ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2408ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2408ML-KC (ext) EP-2408ML-TPC (int)
TS-2408ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2408ML-KC (ext) EP-2408ML-KC (int)*
TS-2408ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2408 (ext) EP-2408ML-TPC (int)
TS-2408ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2408D (ext) P-2408D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



2410 RIDGE BURLAP LEVER x KNOB MORTISE LOCK ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

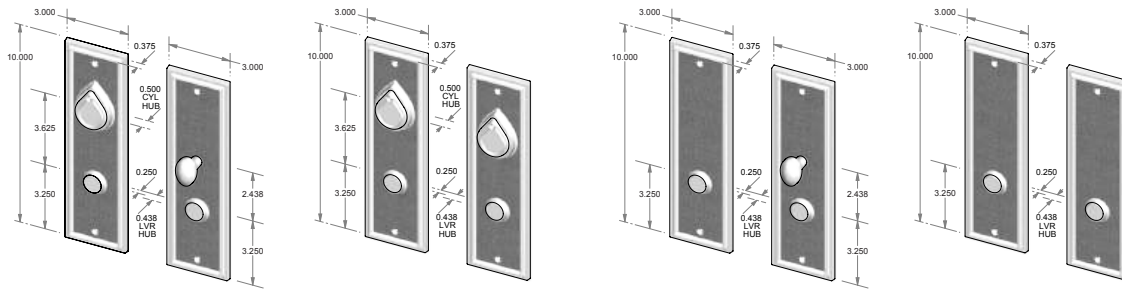

CS-2410ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-300 and TPC-306.
 OR
TS-2410ML
 - Trim set only. No lock.

CS-2410ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-300.
 - Non-egress.
 OR
TS-2410ML-DC
 - Trim set only. No lock.

CS-2410ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 - Shown with TPC-306.
 OR
TS-2410ML-PF
 - Trim set only. No lock.

TS-2410ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2410ML-KC (ext) EP-2410ML-TPC (int)*
CS-2410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2410ML-KC (ext) EP-2410ML-KC (int) Non-egress * **
CS-2410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2410 (ext) EP-2410ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2410ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2410ML-KC (ext) EP-2410ML-TPC (int)
TS-2410ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2410ML-KC (ext) EP-2410ML-KC (int)*
TS-2410ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2410 (ext) EP-2410ML-TPC (int)
TS-2410ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2410D (ext) P-2410D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2510 TETON LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

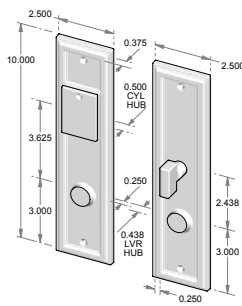


CS-2510ML
– Complete set with mortise lock, cylinder and spindle.
– Single cylinder.
OR
TS-2510ML
– Trim set only. No lock.



CS-2510ML-DC
– Complete set with mortise lock, cylinders and spindle.
– Double cylinder.
– Non-egress.
OR
TS-2510ML-DC
– Trim set only. No lock.

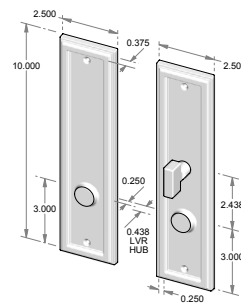

CS-2510ML-PF
– Complete set with mortise lock and spindle.
– Patio function.
OR
TS-2510ML-PF
– Trim set only. No lock.

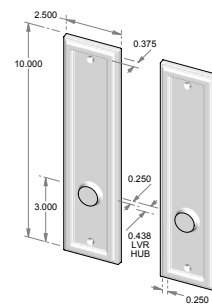

TS-2510ML-FD
– Trim set only.
– Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-2510ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2510ML-KC (ext) EP-2510ML-TPC (int)*
CS-2510ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2510ML-KC (ext) EP-2510ML-KC (int) Non-egress * **
CS-2510ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2510 (ext) EP-2510ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-2510ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-2510ML-KC (ext) EP-2510ML-TPC (int)
TS-2510ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-2510ML-KC (ext) EP-2510ML-KC (int)*
TS-2510ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-2510 (ext) EP-2510ML-TPC (int)
TS-2510ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-2510D (ext) P-2510D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.


Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




E225 EASED EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

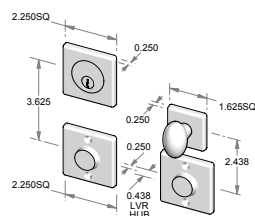


CS-E225ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with CC-E225ML-C.
 OR
TS-E225ML
 - Trim set only. No lock.



CS-E225ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with CC-E225ML-C.
 - Non-egress.
 OR
TS-E225ML-DC
 - Trim set only. No lock.

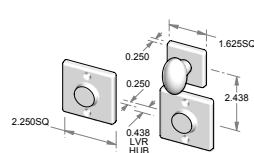

CS-E225ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-E225ML-PF
 - Trim set only. No lock.



TS-E225ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-E225ML

Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/E158ML-TPC (int)*

CS-E225ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/CC-E225ML-C (int) Non-egress * **

CS-E225ML-PF

Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-E225 (ext) P-E225 w/E158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-E225ML

Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/E158ML-TPC (int)

TS-E225ML-DC

Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/CC-E225ML-C (int)*

TS-E225ML-PF

Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-E225 (ext) P-E225 w/E158ML-TPC (int)

TS-E225ML-FD

Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-E225D (ext) P-E225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-E225 EASED EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-F-E225ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with CC-E225ML-C.
 OR
TS-F-E225ML
 - Trim set only. No lock.



CS-F-E225ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with CC-E225ML-C.
 - Non-egress.
 OR
TS-F-E225ML-DC
 - Trim set only. No lock.



CS-F-E225ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
TS-F-E225ML-PF
 - Trim set only. No lock.



TS-F-E225ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-E225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/E158ML-TPC (int)*
CS-F-E225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/CC-E225ML-C (int) Non-egress * **
CS-F-E225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-E225 (ext) P-E225 w/E158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-E225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/E158ML-TPC (int)
TS-F-E225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. P-E225 w/ CC-E225ML-C (ext) P-E225 w/CC-E225ML-C (int)*
TS-F-E225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. P-E225 (ext) P-E225 w/E158ML-TPC (int)
TS-F-E225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. P-E225D (ext) P-E225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




RP-E225 EASED EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.

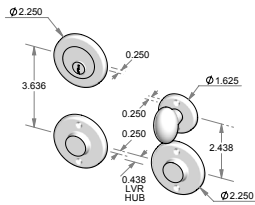


CS-RP-E225ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 – Shown with CC-RP-E225ML-C.
 OR
TS-RP-E225ML
 – Trim set only. No lock.



CS-RP-E225ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Shown with CC-RP-E225ML-C.
 – Non-egress.
 OR
TS-RP-E225ML-DC
 – Trim set only. No lock.



CS-RP-E225ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-RP-E225ML-PF
 – Trim set only. No lock.



TS-RP-E225ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-RP-E225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/RP-E158ML-TPC (int)*
CS-RP-E225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/CC-RP-E225ML-C (int) Non-egress * **
CS-RP-E225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 (ext) RP-E225 w/RP-E158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-RP-E225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/RP-E158ML-TPC (int)
TS-RP-E225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/CC-RP-E225ML-C (int)*
TS-RP-E225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 (ext) RP-E225 w/RP-E158ML-TPC (int)
TS-RP-E225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-E225D (ext) RP-E225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




F-RP-E225 EASED EDGE LEVER x KNOB SECTIONAL MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available. **Note:** Refer to pages 6-2 through 6-4 for mortise cylinder trim options.




CS-F-RP-E225ML
 - Complete set with mortise lock, cylinder and spindle.
 - Single cylinder.
 - Shown with CC-RP-E225ML-C.
 OR
 TS-F-RP-E225ML
 - Trim set only. No lock.



CS-F-RP-E225ML-DC
 - Complete set with mortise lock, cylinders and spindle.
 - Double cylinder.
 - Shown with CC-RP-E225ML-C.
 - Non-egress.
 OR
 TS-F-RP-E225ML-DC
 - Trim set only. No lock.



CS-F-RP-E225ML-PF
 - Complete set with mortise lock and spindle.
 - Patio function.
 OR
 TS-F-RP-E225ML-PF
 - Trim set only. No lock.



TS-F-RP-E225ML-FD
 - Trim set only.
 - Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-F-RP-E225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/RP-E158ML-TPC (int)*
CS-F-RP-E225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/CC-RP-E225ML-C (int) Non-egress * **
CS-F-RP-E225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 (ext) RP-E225 w/RP-E158ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10S.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Thru-bolt only.

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-F-RP-E225ML	Single cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/RP-E158ML-TPC (int)
TS-F-RP-E225ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 w/ CC-RP-E225ML-C (ext) RP-E225 w/CC-RP-E225ML-C (int)*
TS-F-RP-E225ML-PF	Patio function. Lever/knob x lever/knob ML entry set. Sectional. RP-E225 (ext) RP-E225 w/RP-E158ML-TPC (int)
TS-F-RP-E225ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. Sectional. RP-E225D (ext) RP-E225D (int)

Compatible with Accurate mortise locks only.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design and ML cylinder trim.

*1.750" minimum door thickness.


Thru-bolt only.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




E407 EASED EDGE LEVER x KNOB MORTISE LOCK ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate. Additional functions available.

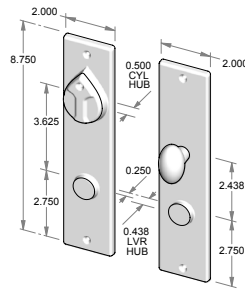


CS-E407ML
 – Complete set with mortise lock, cylinder and spindle.
 – Single cylinder.
 OR
TS-E407ML
 – Trim set only. No lock.



CS-E407ML-DC
 – Complete set with mortise lock, cylinders and spindle.
 – Double cylinder.
 – Non-egress.
 OR
TS-E407ML-DC
 – Trim set only. No lock.

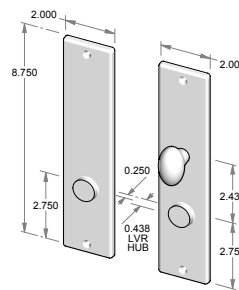

CS-E407ML-PF
 – Complete set with mortise lock and spindle.
 – Patio function.
 OR
TS-E407ML-PF
 – Trim set only. No lock.

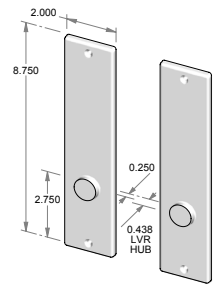

TS-E407ML-FD
 – Trim set only.
 – Full dummy.

Complete sets with cylinder(s), spindle and emergency egress mortise lock (except where noted non-egress).

CS-E407ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-E407ML-KC (ext) EP-E407ML-TPC (int)*
CS-E407ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-E407ML-KC (ext) EP-E407ML-KC (int) Non-egress * **
CS-E407ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-E407 (ext) EP-E407ML-TPC (int)

Accurate 9100 Series mortise lock 2.500" or 2.750" backset standard. Installation instruction #10N.

Additional functions and custom backsets available. Call for options and pricing.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to Parts, Miscellaneous Upcharges UC-2 through UC-4.

**1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder hub height 0.500".

Trim sets for mortise lock with spindle, no lock or cylinder(s) included.

TS-E407ML	Single cylinder. Lever/knob x lever/knob ML entry set. EP-E407ML-KC (ext) EP-E407ML-TPC (int)
TS-E407ML-DC	Double cylinder. Lever/knob x lever/knob ML entry set. EP-E407ML-KC (ext) EP-E407ML-KC (int)*
TS-E407ML-PF	Patio function. Lever/knob x lever/knob ML entry set. P-E407 (ext) EP-E407ML-TPC (int)
TS-E407ML-FD	Full dummy. Lever/knob x lever/knob ML dummy set. P-E407D (ext) P-E407D (int)

Specify manufacturer and function of lock to be used.

Door handing and thickness is required for all lever/knob mortise lock entry sets.

Always specify lever/knob design.

*1.750" minimum door thickness.

Will not cover 2.125" bore.

Total cylinder hub height 0.500".

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

