

CONTENTS

This section contains complete lever/knob deadbolt entry sets and trim only deadbolt entry sets. Complete sets include bronze trim, tubular passage latch, deadbolt, cylinder(s), spindle, fasteners and installation instructions. All complete deadbolt entry set part numbers begin with CS. Trim only sets include bronze trim, spindle, fasteners and installation instructions. No locks, cylinder(s) or latches are included. All trim only deadbolt entry set part numbers begin with TS. Deadbolt entry trim sets can be machined to be compatible with most high quality latches and deadbolts. The lock manufacturer, model number of lock and cylinder type must be specified when ordering trim only sets.

TABLE OF CONTENTS

Lever/Knob Deadbolt Entry Sets

Bevel Edge Lever/Knob Deadbolt Entry Sets	Pages	7-3 – 7-12
Arch Lever/Knob Deadbolt Entry Sets	Pages	7-13 – 7-23
Oval Lever/Knob Deadbolt Entry Sets	Page	7-24
Contemporary Lever/Knob Deadbolt Entry Sets	Pages	7-25 – 7-37
Fleur de Lis Lever/Knob Deadbolt Entry Sets	Pages	7-38 – 7-41
Ridge Lever/Knob Deadbolt Entry Sets	Pages	7-42 – 7-50
Corrugated w/Band Lever/Knob Deadbolt Entry Sets	Pages	7-51 – 7-52
Hampton Lever/Knob Deadbolt Entry Sets	Pages	7-53 – 7-55
Trellis Lever/Knob Deadbolt Entry Sets	Pages	7-56 – 7-57
Deco Lever/Knob Deadbolt Entry Sets	Page	7-58
Corrugated Lever/Knob Deadbolt Entry Sets	Pages	7-59 – 7-61
Bandbox Lever/Knob Deadbolt Entry Sets	Pages	7-62 – 7-67
Corduroy Lever/Knob Deadbolt Entry Sets	Pages	7-68 – 7-73
Mesa Lever/Knob Deadbolt Entry Sets	Pages	7-74 – 7-78
Burlap Lever/Knob Deadbolt Entry Sets	Pages	7-79 – 7-81
Novus Lever/Knob Deadbolt Entry Sets	Pages	7-82 – 7-89
Teton Lever/Knob Deadbolt Entry Sets	Page	7-90


continued on next page

ORDERING INSTRUCTIONS

Complete Sets and Trim Sets: See Ordering Instructions in Binder 1/ Dealer Information.

Custom Sets: See Custom Ordering Instructions in Binder 1/ Dealer Information.

DOOR HANDING GUIDE

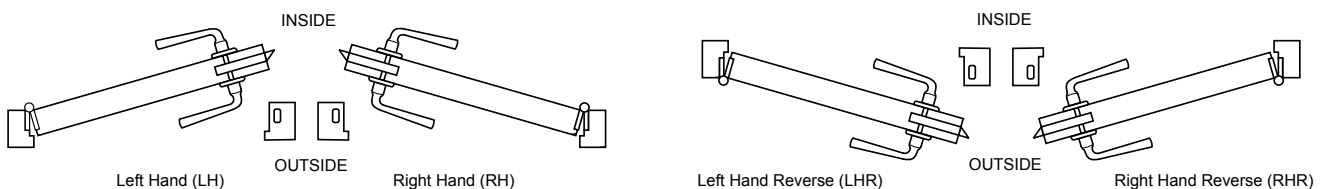

LEVER/KNOB DEADBOLT ENTRY SETS

Bluetooth Smart Deadbolt Entry Sets

Bevel Edge Lever/Knob Bluetooth Smart Deadbolt Entry Sets	Pages 7-91 – 7-95
Arch Lever/Knob Bluetooth Smart Deadbolt Entry Sets	Pages 7-96 – 7-100
Contemporary Lever/Knob Bluetooth Smart Deadbolt Entry Sets	Pages 7-101 – 7-102
Fleur de Lis Lever/Knob Bluetooth Smart Deadbolt Entry Sets	Pages 7-103 – 7-104
Ridge Lever/Knob Bluetooth Smart Deadbolt Entry Sets	Pages 7-105 – 7-107
Bandbox Lever/Knob Bluetooth Smart Deadbolt Entry Sets	Page 7-108


SUN VALLEY BRONZE

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




407 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-407PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-407PLD
 – Trim set only. No latch or deadbolt.



CS-407PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-407PLD-DC
 – Trim set only. No latch or deadbolt.

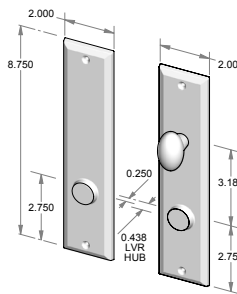

CS-407PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-407PLD-PF
 – Trim set only. No latch or deadbolt.

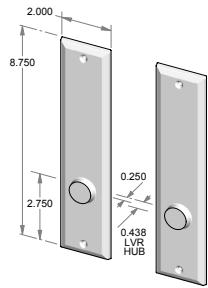

TS-407PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-407PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-407KC (ext) EP-407TPC (int)*
CS-407PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-407KC (ext) EP-407KC (int)*
CS-407PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-407 (ext) EP-407TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-407PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-407KC (ext) EP-407TPC (int)
TS-407PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-407KC (ext) EP-407KC (int)
TS-407PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-407 (ext) EP-407TPC (int)
TS-407PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-407D (ext) P-407D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

***Will not cover 2.125" bore.**


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




408 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-408PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-408PLD
 – Trim set only. No latch or deadbolt.



CS-408PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-408PLD-DC
 – Trim set only. No latch or deadbolt.



CS-408PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-408PLD-PF
 – Trim set only. No latch or deadbolt.



TS-408PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-408KC (ext) EP-408TPC (int)*
CS-408PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-408KC (ext) EP-408KC (int)*
CS-408PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-408 (ext) EP-408TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-408KC (ext) EP-408TPC (int)
TS-408PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-408KC (ext) EP-408KC (int)
TS-408PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-408 (ext) EP-408TPC (int)
TS-408PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-408D (ext) P-408D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




409 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-409PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 OR
TS-409PLD
 - Trim set only. No latch or deadbolt.



CS-409PLD-DC
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 OR
TS-409PLD-DC
 - Trim set only. No latch or deadbolt.

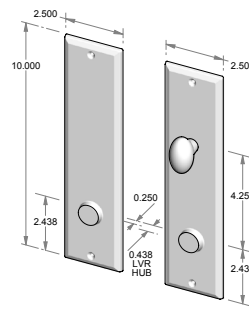

CS-409PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 OR
TS-409PLD-PF
 - Trim set only. No latch or deadbolt.



TS-409PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-409PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409KC (ext) EP-409TPC (int)*
CS-409PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409KC (ext) EP-409KC (int)*
CS-409PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-409 (ext) EP-409TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-409PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409KC (ext) EP-409TPC (int)
TS-409PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409KC (ext) EP-409KC (int)
TS-409PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-409 (ext) EP-409TPC (int)
TS-409PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-409D (ext) P-409D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



409-5.5 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

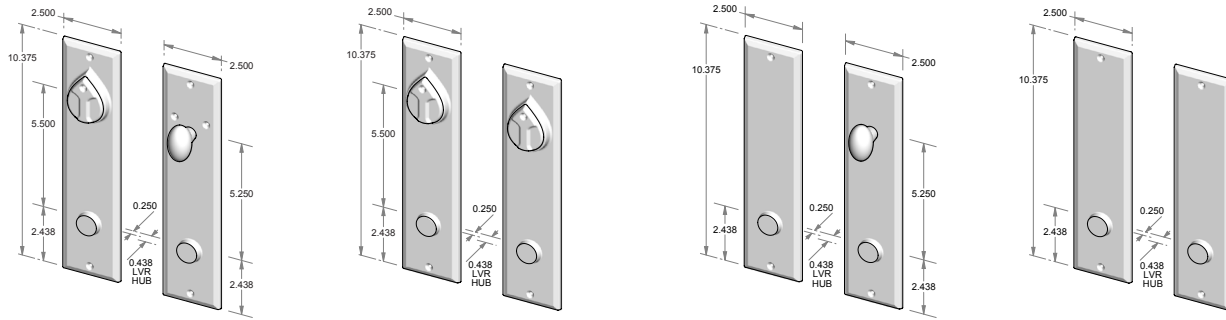

CS-409-5.5PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 OR
TS-409-5.5PLD
 - Trim set only. No latch or deadbolt.

CS-409-5.5PLD-DC
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 OR
TS-409-5.5PLD-DC
 - Trim set only. No latch or deadbolt.

CS-409-5.5PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 OR
TS-409-5.5PLD-PF
 - Trim set only. No latch or deadbolt.

TS-409-5.5PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-409-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409-5.5KC (ext) EP-409-5.5TPC (int)*
CS-409-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409-5.5KC (ext) EP-409-5.5KC (int)*
CS-409-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-409-5.5 (ext) EP-409-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-409-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409-5.5KC (ext) EP-409-5.5TPC (int)
TS-409-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-409-5.5KC (ext) EP-409-5.5KC (int)
TS-409-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-409-5.5 (ext) EP-409-5.5TPC (int)
TS-409-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-409-5.5D (ext) P-409-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



410 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

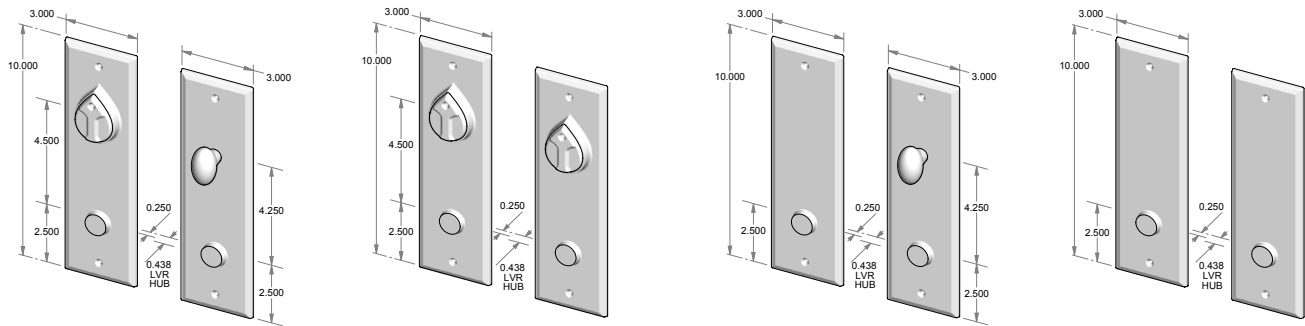

CS-410PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-410PLD
 – Trim set only. No latch or deadbolt.

CS-410PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-410PLD-DC
 – Trim set only. No latch or deadbolt.

CS-410PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-410PLD-PF
 – Trim set only. No latch or deadbolt.

TS-410PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410KC (ext) EP-410TPC (int)*
CS-410PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410KC (ext) EP-410KC (int)*
CS-410PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-410 (ext) EP-410TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410KC (ext) EP-410TPC (int)
TS-410PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410KC (ext) EP-410KC (int)
TS-410PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-410 (ext) EP-410TPC (int)
TS-410PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-410D (ext) P-410D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




410-5.5 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-410-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-410-5.5PLD
 – Trim set only. No latch or deadbolt.

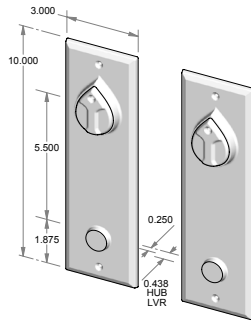

CS-410-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-410-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-410-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-410-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-410-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-410-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410-5.5KC (ext) EP-410-5.5TPC (int)*
CS-410-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410-5.5KC (ext) EP-410-5.5KC (int)*
CS-410-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-410-5.5 (ext) EP-410-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-410-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410-5.5KC (ext) EP-410-5.5TPC (int)
TS-410-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-410-5.5KC (ext) EP-410-5.5KC (int)
TS-410-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-410-5.5 (ext) EP-410-5.5TPC (int)
TS-410-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-410-5.5D (ext) P-410-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



601 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

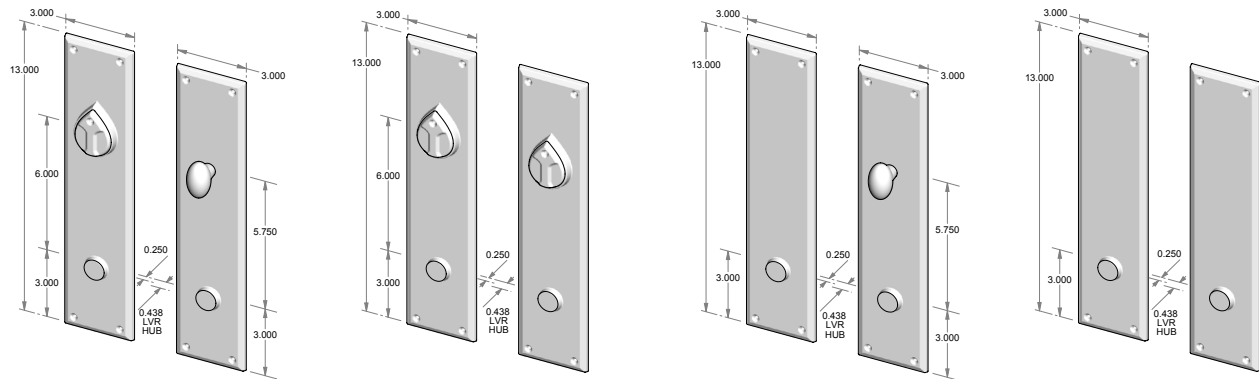

CS-601PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-601PLD
 – Trim set only. No latch or deadbolt.

CS-601PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-601PLD-DC
 – Trim set only. No latch or deadbolt.

CS-601PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-601PLD-PF
 – Trim set only. No latch or deadbolt.

TS-601PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-601PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601KC (ext) EP-601TPC (int)*
CS-601PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601KC (ext) EP-601KC (int)*
CS-601PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-601 (ext) EP-601TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-601PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601KC (ext) EP-601TPC (int)
TS-601PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601KC (ext) EP-601KC (int)
TS-601PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-601 (ext) EP-601TPC (int)
TS-601PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-601D (ext) P-601D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



601-5.5 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

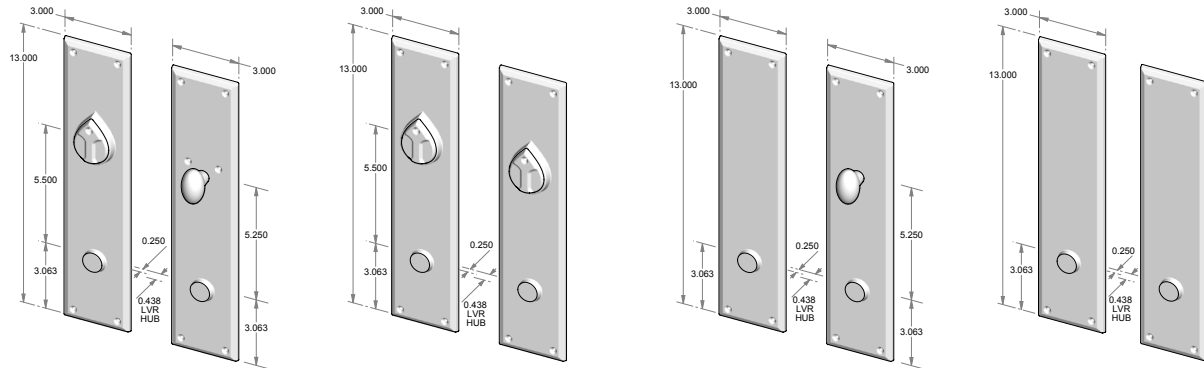

CS-601-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-601-5.5PLD
 – Trim set only. No latch or deadbolt.

CS-601-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-601-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

CS-601-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-601-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

TS-601-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-601-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601-5.5KC (ext) EP-601-5.5TPC (int)*
CS-601-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601-5.5KC (ext) EP-601-5.5KC (int)*
CS-601-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-601-5.5 (ext) EP-601-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-601-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601-5.5KC (ext) EP-601-5.5TPC (int)
TS-601-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-601-5.5KC (ext) EP-601-5.5KC (int)
TS-601-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-601-5.5 (ext) EP-601-5.5TPC (int)
TS-601-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-601-5.5D (ext) P-601-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



602 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

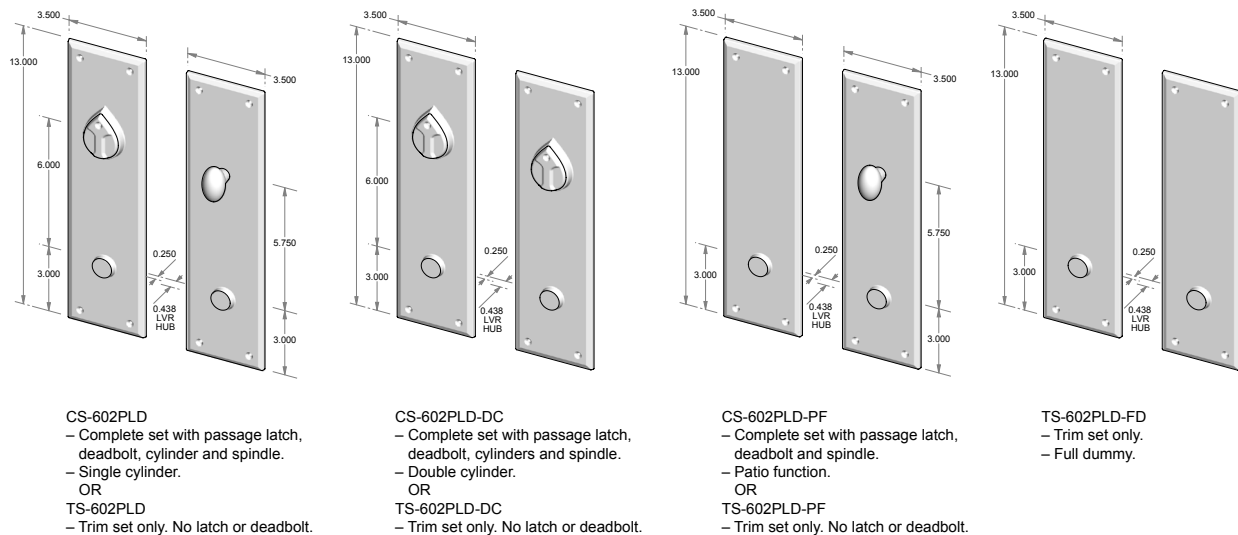

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-602PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602KC (ext) EP-602TPC (int)*
CS-602PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602KC (ext) EP-602KC (int)*
CS-602PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-602 (ext) EP-602TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-602PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602KC (ext) EP-602TPC (int)
TS-602PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602KC (ext) EP-602KC (int)
TS-602PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-602 (ext) EP-602TPC (int)
TS-602PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-602D (ext) P-602D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



602-5.5 BEVEL EDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

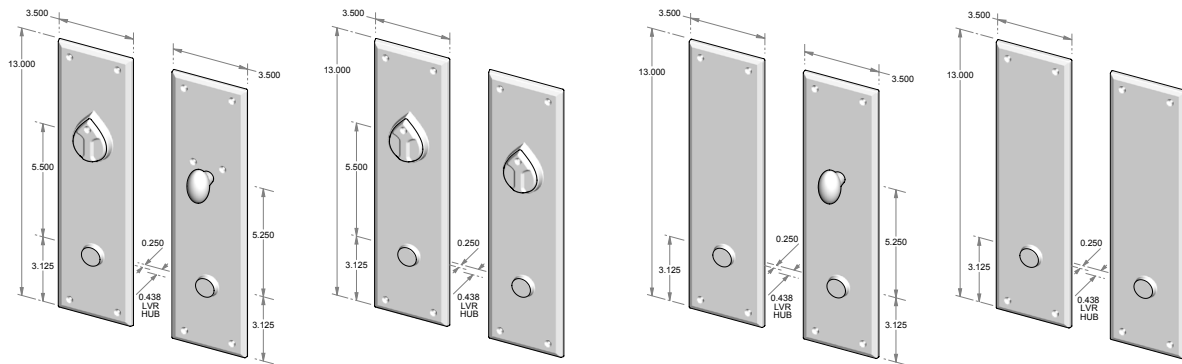

CS-602-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-602-5.5PLD
 – Trim set only. No latch or deadbolt.

CS-602-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-602-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

CS-602-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-602-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

TS-602-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-602-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602-5.5KC (ext) EP-602-5.5TPC (int)*
CS-602-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602-5.5KC (ext) EP-602-5.5KC (int)*
CS-602-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-602-5.5 (ext) EP-602-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-602-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602-5.5KC (ext) EP-602-5.5TPC (int)
TS-602-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-602-5.5KC (ext) EP-602-5.5KC (int)
TS-602-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-602-5.5 (ext) EP-602-5.5TPC (int)
TS-602-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-602-5.5D (ext) P-602-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A406 ARCH LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-A406PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-A406PLD
 – Trim set only. No latch or deadbolt.



CS-A406PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-A406PLD-DC
 – Trim set only. No latch or deadbolt.

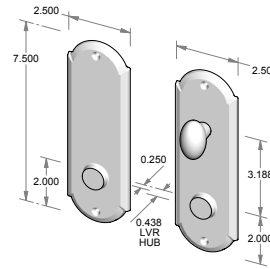

CS-A406PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-A406PLD-PF
 – Trim set only. No latch or deadbolt.



TS-A406PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A406PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A406KC (ext) EP-A406TPC (int)*
CS-A406PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A406KC (ext) EP-A406KC (int)*
CS-A406PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A406 (ext) EP-A406TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A406PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A406KC (ext) EP-A406TPC (int)
TS-A406PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A406KC (ext) EP-A406KC (int)
TS-A406PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A406 (ext) EP-A406TPC (int)
TS-A406PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A406D (ext) P-A406D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A407 ARCH LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

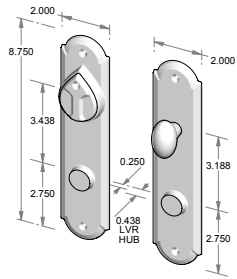


CS-A407PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-A407PLD
 – Trim set only. No latch or deadbolt.



CS-A407PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-A407PLD-DC
 – Trim set only. No latch or deadbolt.

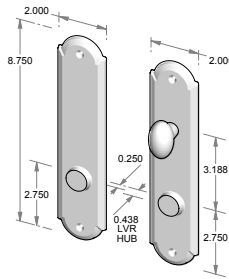

CS-A407PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-A407PLD-PF
 – Trim set only. No latch or deadbolt.



TS-A407PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A407PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A407KC (ext) EP-A407TPC (int)*
CS-A407PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A407KC (ext) EP-A407KC (int)*
CS-A407PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A407 (ext) EP-A407TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A407PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A407KC (ext) EP-A407TPC (int)
TS-A407PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A407KC (ext) EP-A407KC (int)
TS-A407PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A407 (ext) EP-A407TPC (int)
TS-A407PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A407D (ext) P-A407D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A408 ARCH LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

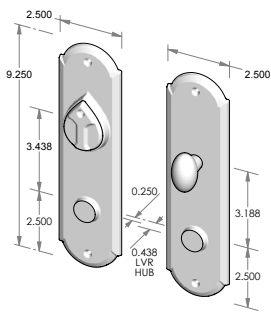


CS-A408PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-A408PLD
 – Trim set only. No latch or deadbolt.

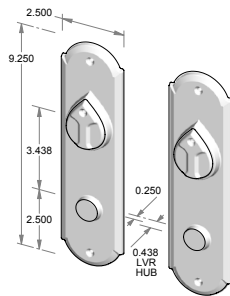

CS-A408PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-A408PLD-DC
 – Trim set only. No latch or deadbolt.

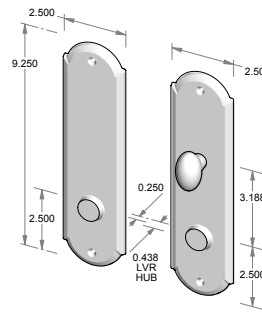

CS-A408PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-A408PLD-PF
 – Trim set only. No latch or deadbolt.



TS-A408PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A408KC (ext) EP-A408TPC (int)*
CS-A408PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A408KC (ext) EP-A408KC (int)*
CS-A408PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A408 (ext) EP-A408TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A408KC (ext) EP-A408TPC (int)
TS-A408PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A408KC (ext) EP-A408KC (int)
TS-A408PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A408 (ext) EP-A408TPC (int)
TS-A408PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A408D (ext) P-A408D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A409 ARCH LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

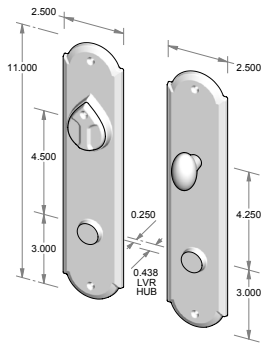


CS-A409PLD
– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-A409PLD
– Trim set only. No latch or deadbolt.



CS-A409PLD-DC
– Complete set with passage latch, deadbolt, cylinders and spindle.
– Double cylinder.
OR
TS-A409PLD-DC
– Trim set only. No latch or deadbolt.



CS-A409PLD-PF
– Complete set with passage latch, deadbolt and spindle.
– Patio function.
OR
TS-A409PLD-PF
– Trim set only. No latch or deadbolt.



TS-A409PLD-FD
– Trim set only.
– Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A409PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409KC (ext) EP-A409TPC (int)*
CS-A409PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409KC (ext) EP-A409KC (int)*
CS-A409PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A409 (ext) EP-A409TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A409PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409KC (ext) EP-A409TPC (int)
TS-A409PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409KC (ext) EP-A409KC (int)
TS-A409PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A409 (ext) EP-A409TPC (int)
TS-A409PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A409D (ext) P-A409D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




A409-5.5 ARCH LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-A409-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-A409-5.5PLD
 – Trim set only. No latch or deadbolt.

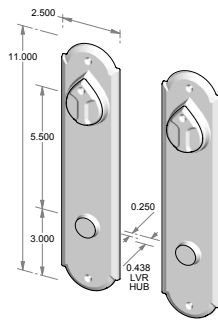

CS-A409-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-A409-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-A409-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-A409-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-A409-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A409-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409-5.5KC (ext) EP-A409-5.5TPC (int)*

CS-A409-5.5PLD-DC

Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409-5.5KC (ext) EP-A409-5.5KC (int)*

CS-A409-5.5PLD-PF

Patio function. Lever/knob x lever/knob deadbolt entry set. P-A409-5.5 (ext) EP-A409-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A409-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409-5.5KC (ext) EP-A409-5.5TPC (int)

TS-A409-5.5PLD-DC

Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A409-5.5KC (ext) EP-A409-5.5KC (int)

TS-A409-5.5PLD-PF

Patio function. Lever/knob x lever/knob deadbolt entry set. P-A409-5.5 (ext) EP-A409-5.5TPC (int)

TS-A409-5.5PLD-FD

Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A409-5.5D (ext) P-A409-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A410 ARCH LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

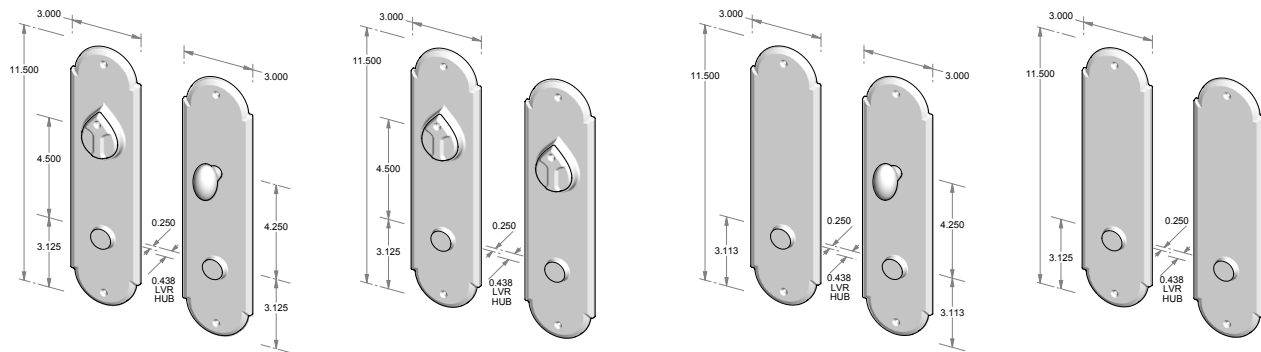

CS-A410PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 OR
TS-A410PLD
 - Trim set only. No latch or deadbolt.

CS-A410PLD-DC
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 OR
TS-A410PLD-DC
 - Trim set only. No latch or deadbolt.

CS-A410PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 OR
TS-A410PLD-PF
 - Trim set only. No latch or deadbolt.

TS-A410PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410KC (ext) EP-A410TPC (int)*
CS-A410PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410KC (ext) EP-A410KC (int)*
CS-A410PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A410 (ext) EP-A410TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410KC (ext) EP-A410TPC (int)
TS-A410PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410KC (ext) EP-A410KC (int)
TS-A410PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A410 (ext) EP-A410TPC (int)
TS-A410PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A410D (ext) P-A410D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A410-5.5 ARCH LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

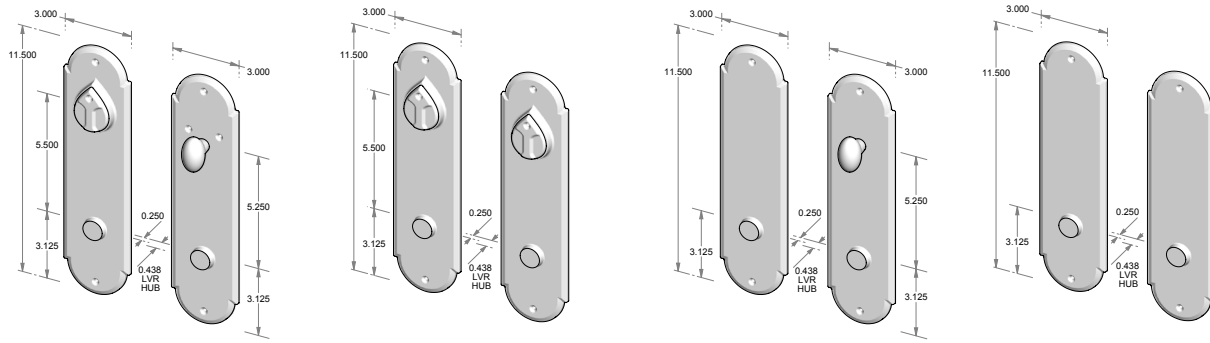

CS-A410-5.5PLD
– Complete set with passage latch,
deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-A410-5.5PLD
– Trim set only. No latch or deadbolt.

CS-A410-5.5PLD-DC
– Complete set with passage latch,
deadbolt, cylinders and spindle.
– Double cylinder.
OR
TS-A410-5.5PLD-DC
– Trim set only. No latch or deadbolt.

CS-A410-5.5PLD-PF
– Complete set with passage latch,
deadbolt and spindle.
– Patio function.
OR
TS-A410-5.5PLD-PF
– Trim set only. No latch or deadbolt.

TS-A410-5.5PLD-FD
– Trim set only.
– Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A410-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410-5.5KC (ext) EP-A410-5.5TPC (int)*
CS-A410-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410-5.5KC (ext) EP-A410-5.5KC (int)*
CS-A410-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A410-5.5 (ext) EP-A410-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A410-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410-5.5KC (ext) EP-A410-5.5TPC (int)
TS-A410-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A410-5.5KC (ext) EP-A410-5.50KC (int)
TS-A410-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A410-5.5 (ext) EP-A410-5.5TPC (int)
TS-A410-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A410-5.5D (ext) P-A410-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A601 ARCH LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

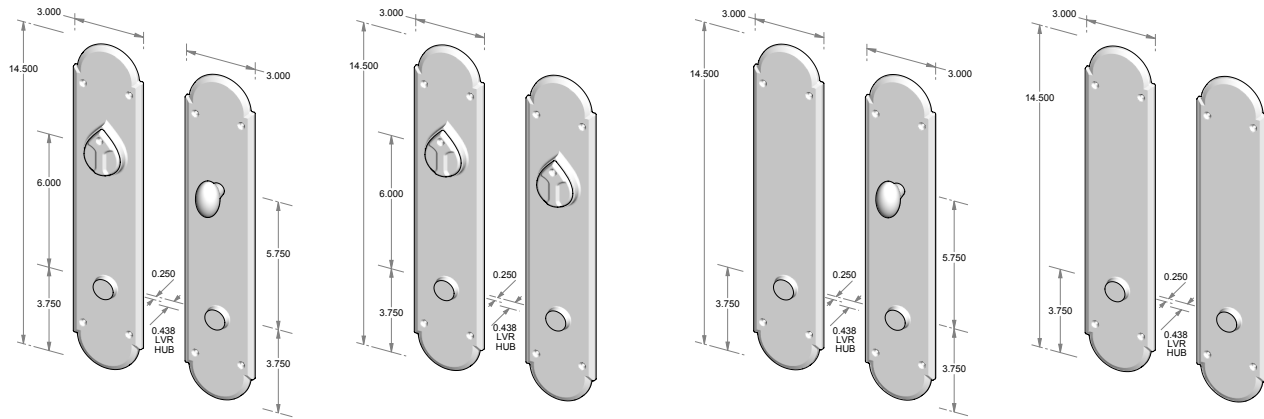

CS-A601PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-A601PLD
 – Trim set only. No latch or deadbolt.

CS-A601PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-A601PLD-DC
 – Trim set only. No latch or deadbolt.

CS-A601PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-A601PLD-PF
 – Trim set only. No latch or deadbolt.

TS-A601PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A601PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601KC (ext) EP-A601TPC (int)*
CS-A601PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601KC (ext) EP-A601KC (int)*
CS-A601PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A601 (ext) EP-A601TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.
 6.000" center-to-center spacing.
 Door handing and thickness is required for all lever/knob deadbolt entry sets.
 Always specify lever/knob design.
 *Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A601PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601KC (ext) EP-A601TPC (int)
TS-A601PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601KC (ext) EP-A601KC (int)
TS-A601PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A601 (ext) EP-A601TPC (int)
TS-A601PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A601D (ext) P-A601D (int)

Specify manufacturer and function of lock to be used.
 2.375" or 2.750" backset standard.
 1.375" minimum door thickness.
 6.000" center-to-center spacing.
 Door handing and thickness is required for all lever/knob deadbolt entry sets.
 Always specify lever/knob design.


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



A601-5.5 ARCH LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

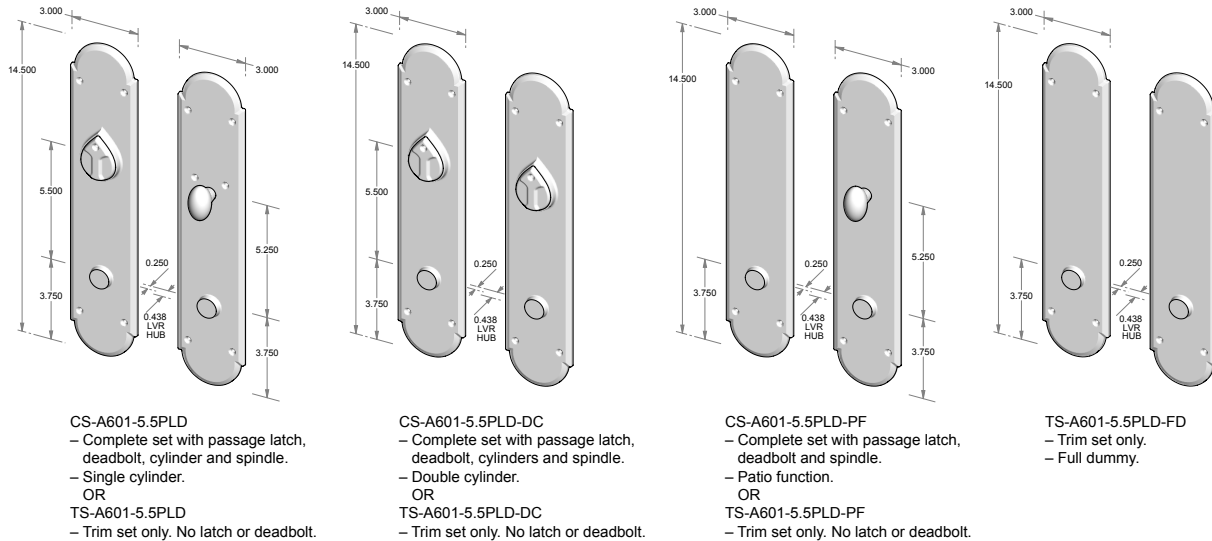

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A601-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601-5.5KC (ext) EP-A601-5.5TPC (int)*
CS-A601-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601-5.5KC (ext) EP-A601-5.5KC (int)*
CS-A601-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A601-5.5 (ext) EP-A601-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A601-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601-5.5KC (ext) EP-A601-5.5TPC (int)
TS-A601-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A601-5.5KC (ext) EP-A601-5.5KC (int)
TS-A601-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A601-5.5 (ext) EP-A601-5.5TPC (int)
TS-A601-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A601-5.5D (ext) P-A601-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A602 ARCH LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

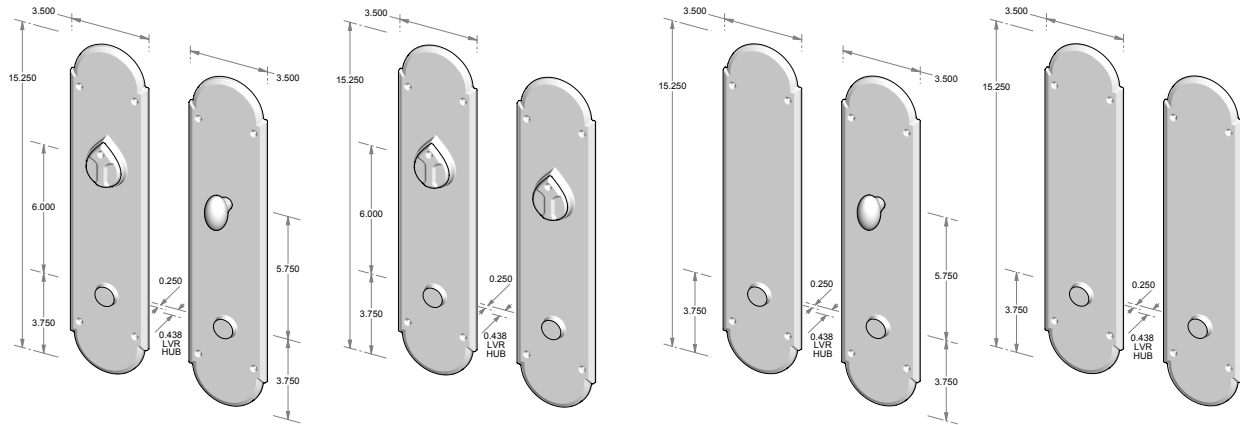

CS-A602PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-A602PLD
 – Trim set only. No latch or deadbolt.

CS-A602PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-A602PLD-DC
 – Trim set only. No latch or deadbolt.

CS-A602PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-A602PLD-PF
 – Trim set only. No latch or deadbolt.

TS-A602PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A602PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602KC (ext) EP-A602TPC (int)*
CS-A602PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602KC (ext) EP-A602KC (int)*
CS-A602PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A602 (ext) EP-A602TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A602PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602KC (ext) EP-A602TPC (int)
TS-A602PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602KC (ext) EP-A602KC (int)
TS-A602PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A602 (ext) EP-A602TPC (int)
TS-A602PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A602D (ext) P-A602D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



A602-5.5 ARCH LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

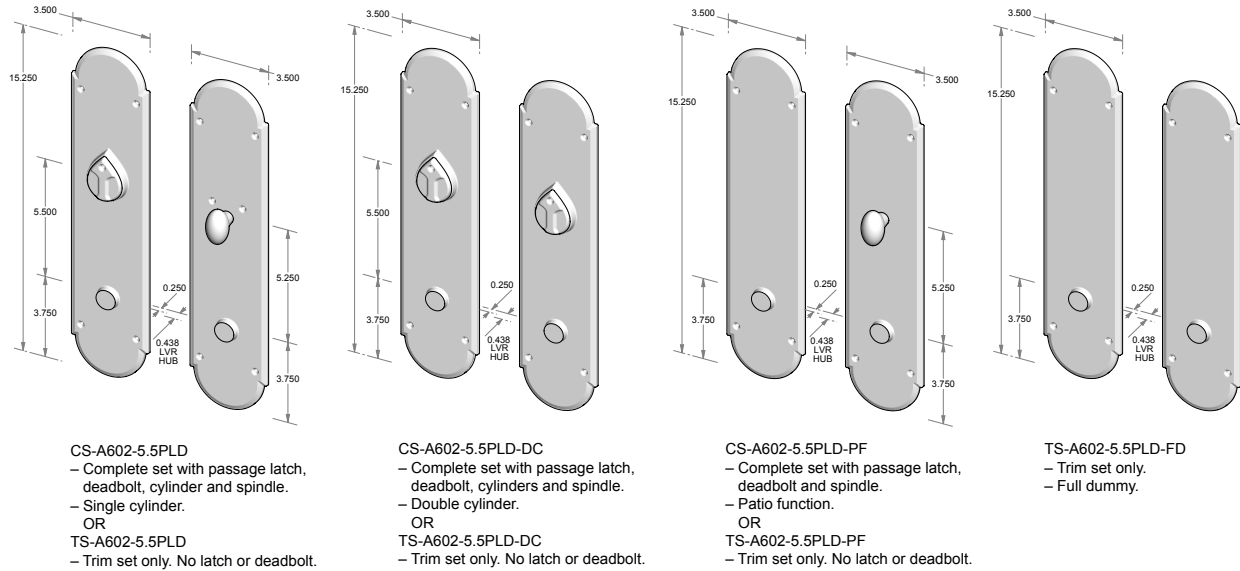

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-A602-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602-5.5KC (ext) EP-A602-5.5TPC (int)*
CS-A602-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602-5.5KC (ext) EP-A602-5.5KC (int)*
CS-A602-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A602-5.5 (ext) EP-A602-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-A602-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602-5.5KC (ext) EP-A602-5.5TPC (int)
TS-A602-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-A602-5.5KC (ext) EP-A602-5.5KC (int)
TS-A602-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-A602-5.5 (ext) EP-A602-5.5TPC (int)
TS-A602-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-A602-5.5D (ext) P-A602-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




OP700 OVAL LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-OP700PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 OR
TS-OP700PLD
 - Trim set only. No latch or deadbolt.



CS-OP700PLD-DC
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 OR
TS-OP700PLD-DC
 - Trim set only. No latch or deadbolt.

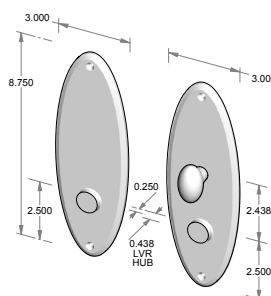

CS-OP700PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 OR
TS-OP700PLD-PF
 - Trim set only. No latch or deadbolt.

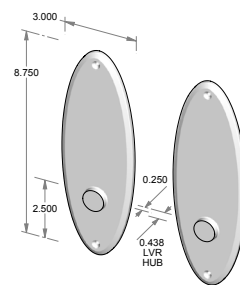

TS-OP700PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-OP700PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-OP700KC (ext) EP-OP700TPC (int)*
CS-OP700PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-OP700KC (ext) EP-OP700KC (int)*
CS-OP700PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-OP700 (ext) EP-OP700TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-OP700PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-OP700KC (ext) EP-OP700TPC (int)
TS-OP700PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-OP700KC (ext) EP-OP700KC (int)
TS-OP700PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-OP700 (ext) EP-OP700TPC (int)
TS-OP700PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-OP700D (ext) P-OP700D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




950 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

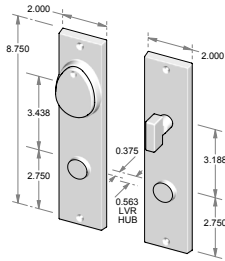


CS-950PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-950PLD
 – Trim set only. No no latch or deadbolt.



CS-950PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-950PLD-DC-NKC
 – Trim set only. No no latch or deadbolt.



CS-950PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-950PLD-PF
 – Trim set only. No no latch or deadbolt.

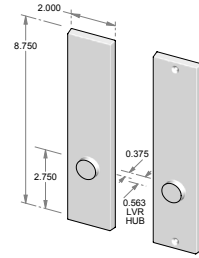

TS-950PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-950PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-950KC (ext) EP-950TPC (int)*
CS-950PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-950NKC (ext) EP-950NKC (int)*
CS-950PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-950 (ext) EP-950TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.
 3.438" center-to-center spacing.
 Door handing and thickness is required for all lever/knob deadbolt entry sets.
 Always specify lever/knob design.
 All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-950PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-950KC (ext) EP-950TPC (int)
TS-950PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-950NKC (ext) EP-950NKC (int)
TS-950PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-950 (ext) EP-950TPC (int)
TS-950PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-950D (ext) P-950D (int)


Specify manufacturer and function of lock to be used.
 2.375" or 2.750" backset standard.
 1.375" minimum door thickness.
 3.438" center-to-center spacing.
 Door handing and thickness is required for all lever/knob deadbolt entry sets.
 Always specify lever/knob design.
 All functions available without key cover. Add NKC to part number.
***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




950R CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

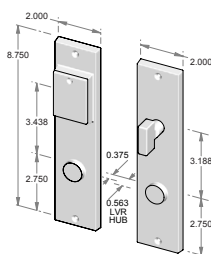


CS-950R-PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-950R-PLD
 – Trim set only. No latch or deadbolt.



CS-950R-PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-950R-PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

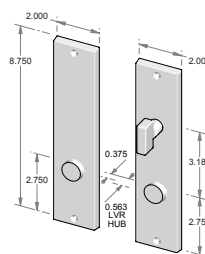

CS-950PLD-P*
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-950PLD-PF
 – Trim set only. No latch or deadbolt.

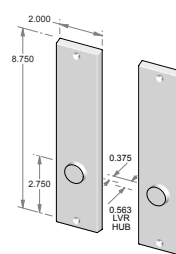

TS-950PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-950R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-950R-KC (ext) EP-950R-TPC (int)*
CS-950R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-950R-NKC (ext) EP-950R-NKC (int)*
CS-950PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-950 (ext) EP-950TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-950R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-950R-KC (ext) EP-950R-TPC (int)
TS-950R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-950R-NKC (ext) EP-950R-NKC (int)
TS-950PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-950 (ext) EP-950TPC (int)
TS-950PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-950D (ext) P-950D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.


***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




951 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

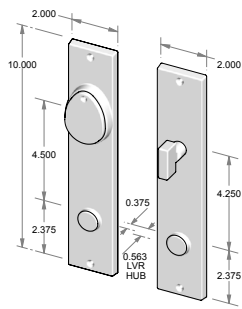


CS-951PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-951PLD
 – Trim set only. No latch or deadbolt.

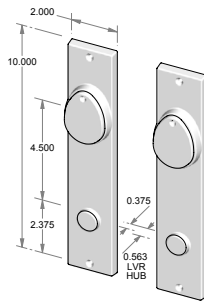

CS-951PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-951PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

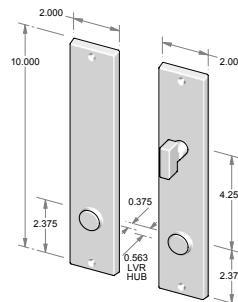

CS-951PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-951PLD-PF
 – Trim set only. No latch or deadbolt.

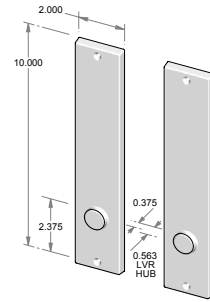

TS-951PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-951PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951KC (ext) EP-951TPC (int)*
CS-951PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951NKC (ext) EP-951NKC (int)*
CS-951PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-951 (ext) EP-951TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-951PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951KC (ext) EP-951TPC (int)
TS-951PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951NKC (ext) EP-951NKC (int)
TS-951PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-951 (ext) EP-951TPC (int)
TS-951PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-951D (ext) P-951D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.


***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




951-5.5 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-951-5.5PLD
– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-951-5.5PLD
– Trim set only. No latch or deadbolt.



CS-951-5.5PLD-DC-NKC*
– Complete set with passage latch, deadbolt, cylinders and spindle.
– Double cylinder.
– *Shown without key cover. Must be specified NKC.
OR
TS-951-5.5PLD-DC-NKC
– Trim set only. No latch or deadbolt.



CS-951-5.5PLD-PF
– Complete set with passage latch, deadbolt and spindle.
– Patio function.
OR
TS-951-5.5PLD-PF
– Trim set only. No latch or deadbolt.



TS-951-5.5PLD-FD
– Trim set only.
– Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-951-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951-5.5KC (ext) EP-951-5.5TPC (int)*
CS-951-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951-5.5NKC (ext) EP-951-5.5NKC (int)*
CS-951-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-951-5.5 (ext) EP-951-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-951-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951-5.5KC (ext) EP-951-5.5TPC (int)
TS-951-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-951-5.5NKC (ext) EP-951-5.5NKC (int)
TS-951-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-951-5.5 (ext) EP-951-5.5TPC (int)
TS-951-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-951-5.5D (ext) P-951-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.


***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




951R CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-951R-PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-951R-PLD
 – Trim set only. No latch or deadbolt.



CS-951R-PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-951R-PLD-DC-NKC
 – Trim set only. No latch or deadbolt.



CS-951-PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-951-PLD-PF
 – Trim set only. No latch or deadbolt.



TS-951-PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-951R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-951R-KC (ext) EP-951TPC (int)*
CS-951R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-951R-NKC (ext) EP-951R-NKC (int)*
CS-951PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-951 (ext) EP-951TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-951R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-951R-KC (ext) EP-951TPC (int)
TS-951R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-951R-NKC (ext) EP-951R-NKC (int)
TS-951PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-951 (ext) EP-951TPC (int)
TS-951PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-951D (ext) P-951D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.


***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



952 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

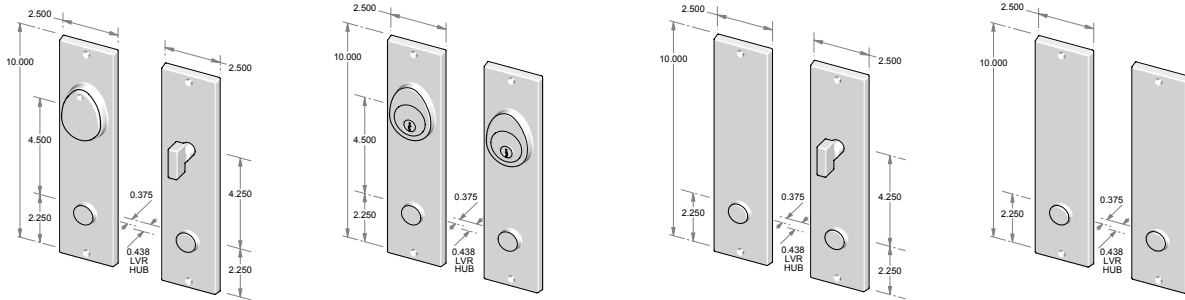

CS-952PLD

- Complete set with passage latch, deadbolt, cylinder and spindle.
- Single cylinder.
- OR
- TS-952PLD
- Trim set only. No latch or deadbolt.

CS-952PLD-DC-NKC*

- Complete set with passage latch, deadbolt, cylinders and spindle.
- Double cylinder.
- *Shown without key cover. Must be specified NKC.
- OR
- TS-952PLD-DC-NKC
- Trim set only. No latch or deadbolt.

CS-952PLD-PF

- Complete set with passage latch, deadbolt and spindle.
- Patio function.
- OR
- TS-952PLD-PF
- Trim set only. No latch or deadbolt.

TS-952PLD-FD

- Trim set only.
- Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-952PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952KC (ext) EP-952TPC (int)*
CS-952PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952NKC (ext) EP-952NKC (int)*
CS-952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952 (ext) EP-952TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-952PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952KC (ext) EP-952TPC (int)
TS-952PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952NKC (ext) EP-952NKC (int)
TS-952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952 (ext) EP-952TPC (int)
TS-952PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-952D (ext) P-952D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




952-5.5 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-952-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-952-5.5PLD
 – Trim set only. No latch or deadbolt.

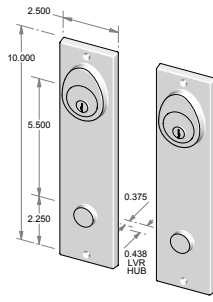

CS-952-5.5PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-952-5.5PLD-DC-NKC
 – Trim set only. No latch or deadbolt.



CS-952-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-952-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-952-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-952-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952-5.5KC (ext) EP-952-5.5TPC (int)*
CS-952-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952-5.5NKC (ext) EP-952-5.5NKC (int)*
CS-952-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-95-5.52 (ext) EP-952-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-952-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952-5.5KC (ext) EP-952-5.5TPC (int)
TS-952-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-952-5.5NKC (ext) EP-952-5.5NKC (int)
TS-952-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952-5.5 (ext) EP-952-5.5TPC (int)
TS-952-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-952-5.5D (ext) P-952-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



952R CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

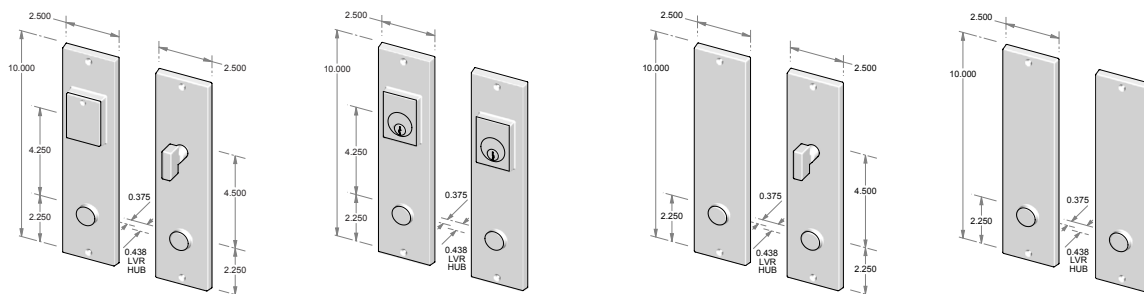

CS-952R-PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 OR
TS-952R-PLD
 - Trim set only. No latch or deadbolt.

CS-952R-PLD-DC-NKC*
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 - *Shown without key cover. Must be specified NKC.
 OR
TS-952R-PLD-DC-NKC
 - Trim set only. No latch or deadbolt.

CS-952PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 OR
TS-952PLD-PF
 - Trim set only. No latch or deadbolt.

TS-952PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-952R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R-KC (ext) EP-952TPC (int)*
CS-952R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R-NKC (ext) EP-952R-NKC (int)*
CS-952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952 (ext) EP-952TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-952R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R-KC (ext) EP-952TPC (int)
TS-952R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R-NKC (ext) EP-952R-NKC (int)
TS-952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952 (ext) EP-952TPC (int)
TS-952PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-952D (ext) P-952D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



952R5.5 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

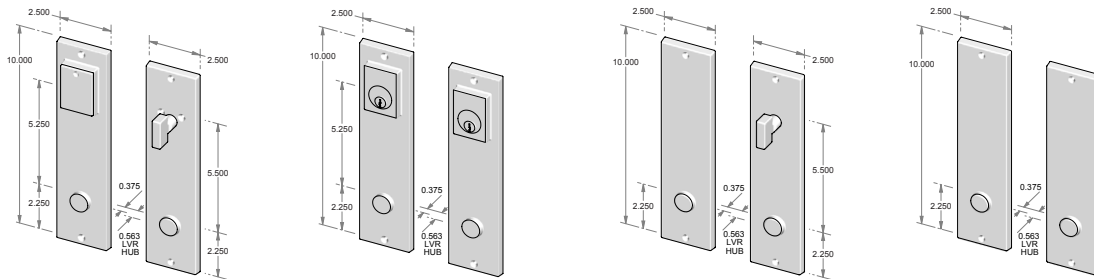

CS-952R5.5PLD
– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-952R5.5PLD
– Trim set only. No latch or deadbolt.

CS-952R5.5PLD-DC-NKC*
– Complete set with passage latch, deadbolt, cylinders and spindle.
– Double cylinder.
– *Shown without key cover. Must be specified NKC.
OR
TS-952R5.5PLD-DC-NKC
– Trim set only. No latch or deadbolt.

CS-952-5.5PLD-PF
– Complete set with passage latch, deadbolt and spindle.
– Patio function.
OR
TS-952-5.5PLD-PF
– Trim set only. No latch or deadbolt.

TS-952-5.5PLD-FD
– Trim set only.
– Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-952R5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R5.5-KC (ext) EP-952-5.5TPC (int)*
CS-952R5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R5.5-NKC (ext) EP-952R5.5-NKC (int)*
CS-952-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952-5.5 (ext) EP-952-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.
5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.
Door handing and thickness is required for all lever/knob deadbolt entry sets.
Always specify lever/knob design.
All functions available without key cover. Add NKC to part number.
*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-952R5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R5.5-KC (ext) EP-952-5.5TPC (int)
TS-952R5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-952R5.5-NKC (ext) EP-952R5.5-NKC (int)
TS-952-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-952-5.5 (ext) EP-952-5.5TPC (int)
TS-952-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-952-5.5D (ext) P-952-5.5D (int)


Specify manufacturer and function of lock to be used.
2.375" or 2.750" backset standard.
1.375" minimum door thickness.
5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.
Door handing and thickness is required for all lever/knob deadbolt entry sets.
Always specify lever/knob design.
All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



953 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

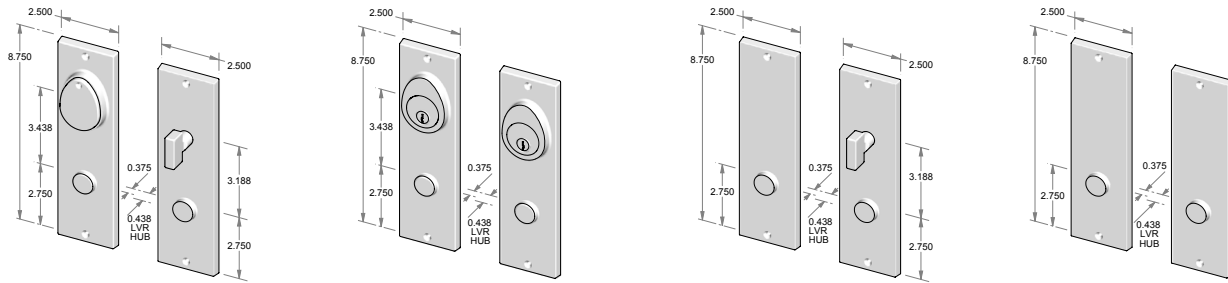

CS-953PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-953PLD
 – Trim set only. No latch or deadbolt.

CS-953PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-953PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

CS-953PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-953PLD-PF
 – Trim set only. No latch or deadbolt.

TS-953PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-953PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-953KC (ext) EP-953TPC (int)*
CS-953PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-953NKC (ext) EP-953NKC (int)*
CS-953PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-953 (ext) EP-953TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.
 3.438" center-to-center spacing.
 Door handing and thickness is required for all lever/knob deadbolt entry sets.
 Always specify lever/knob design.
 All functions available without key cover. Add NKC to part number.
 *Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-953PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-953KC (ext) EP-953TPC (int)
TS-953PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-953NKC (ext) EP-953NKC (int)
TS-953PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-953 (ext) EP-953TPC (int)
TS-953PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-953D (ext) P-953D (int)

Specify manufacturer and function of lock to be used.
 2.375" or 2.750" backset standard.
 1.375" minimum door thickness.
 3.438" center-to-center spacing.
 Door handing and thickness is required for all lever/knob deadbolt entry sets.
 Always specify lever/knob design.
 All functions available without key cover. Add NKC to part number.


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




953R CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

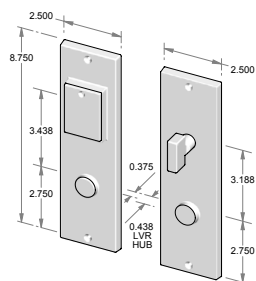


CS-953R-PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-953R-PLD
 – Trim set only. No latch or deadbolt.

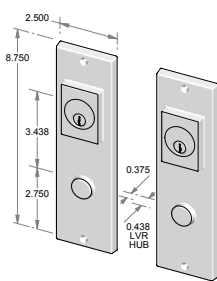

CS-953R-PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-953R-PLD-DC-NKC
 – Trim set only. No latch or deadbolt.



CS-953R-PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-953R-PLD-PF
 – Trim set only. No latch or deadbolt.



TS-953R-PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-953R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-953R-KC (ext) EP-953TPC (int)*
CS-953R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-953R-NKC (ext) EP-953R-NKC (int)*
CS-953PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-953 (ext) EP-953TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-953R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-953R-KC (ext) EP-953TPC (int)
TS-953R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-953R-NKC (ext) EP-953R-NKC (int)
TS-953PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-953 (ext) EP-953TPC (int)
TS-953PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-953D (ext) P-953D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




955 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

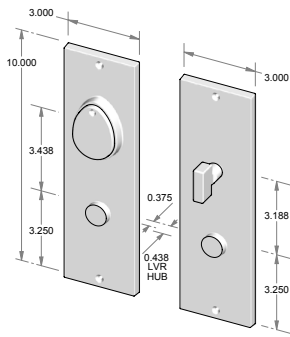


CS-955PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-955PLD
 – Trim set only. No latch or deadbolt.

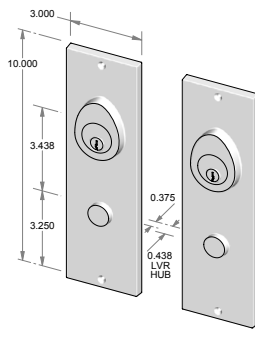

CS-955PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-955PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

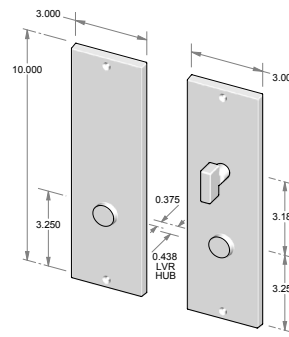

CS-955PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-955PLD-PF
 – Trim set only. No latch or deadbolt.



TS-955PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-955PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-955KC (ext) EP-955TPC (int)*
CS-955PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-955NKC (ext) EP-955NKC (int)*
CS-955PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-955 (ext) EP-955TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-955PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-955KC (ext) EP-955TPC (int)
TS-955PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-955NKC (ext) EP-955NKC (int)
TS-955PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-955 (ext) EP-955TPC (int)
TS-955PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-955D (ext) P-955D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



957 CONTEMPORARY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

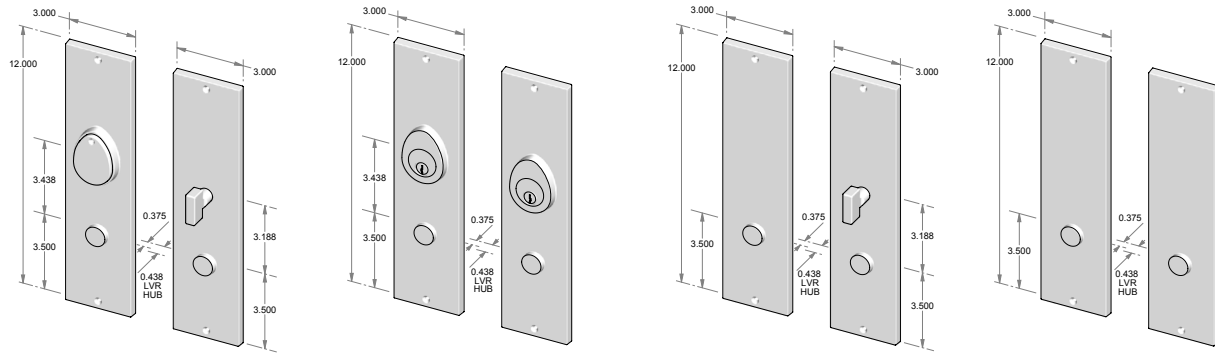

CS-957PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-957PLD
 – Trim set only. No latch or deadbolt.

CS-957PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-957PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

CS-957PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-957PLD-PF
 – Trim set only. No latch or deadbolt.

TS-957PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-957PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-957KC (ext) EP-957TPC (int)*
CS-957PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-957NKC (ext) EP-957NKC (int)*
CS-957PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-957 (ext) EP-957TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-957PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-957KC (ext) EP-957TPC (int)
TS-957PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-957NKC (ext) EP-957NKC (int)
TS-957PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-957 (ext) EP-957TPC (int)
TS-957PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-957D (ext) P-957D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1245 FLEUR DE LIS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

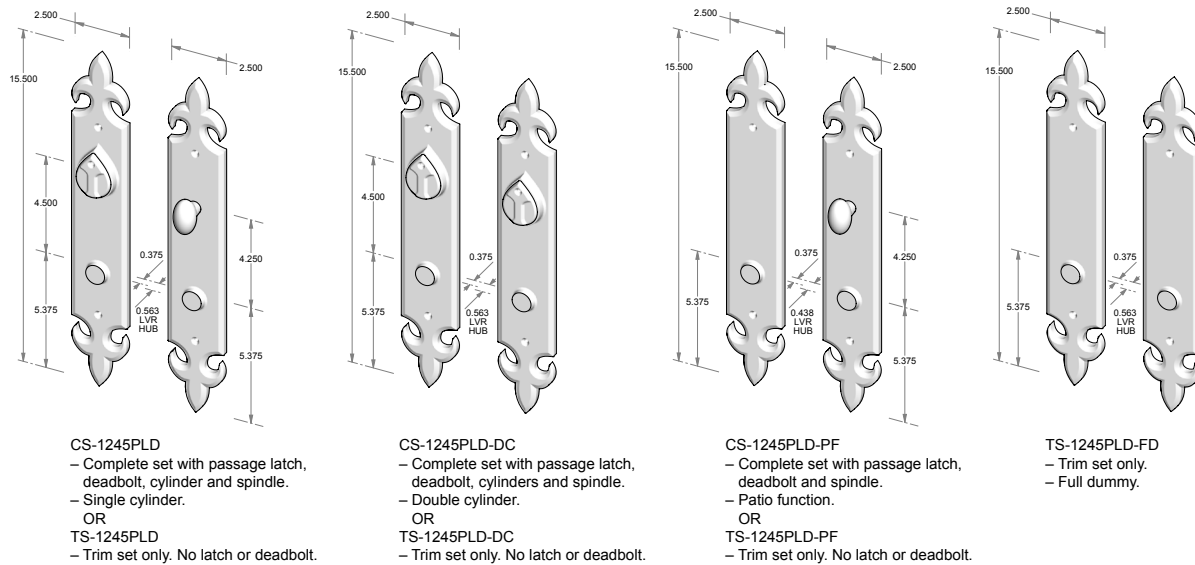

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1245PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245KC (ext) EP-1245TPC (int)*
CS-1245PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245KC (ext) EP-1245KC (int)*
CS-1245PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1245 (ext) EP-1245TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1245PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245KC (ext) EP-1245TPC (int)
TS-1245PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245KC (ext) EP-1245KC (int)
TS-1245PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1245 (ext) EP-1245TPC (int)
TS-1245PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1245D (ext) P-1245D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1245-5.5 FLEUR DE LIS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

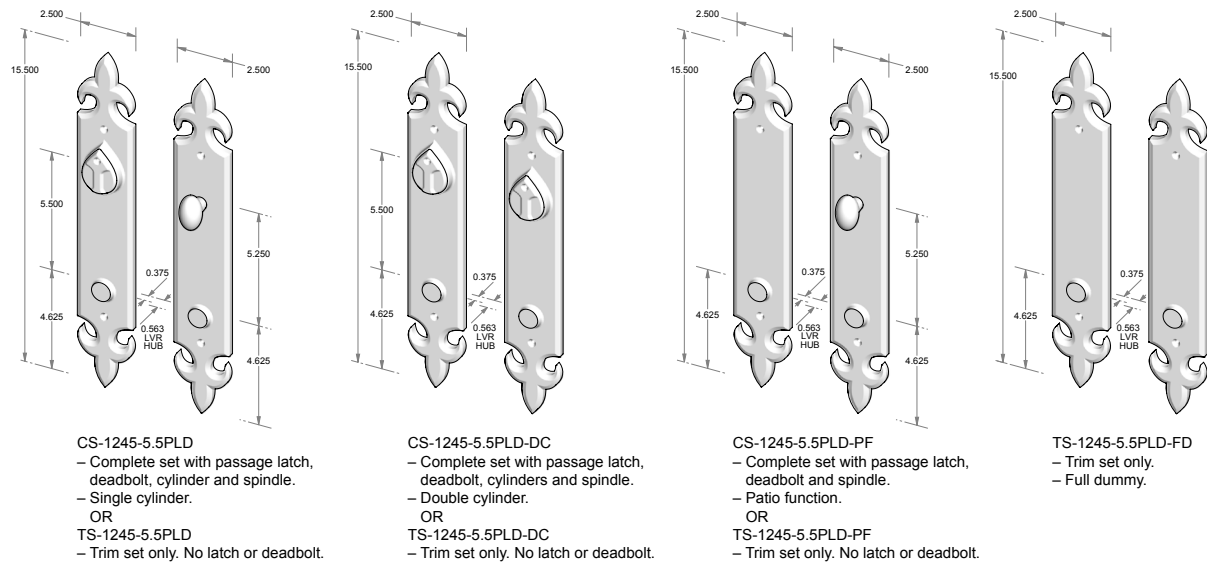

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1245-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245-5.5KC (ext) EP-1245-5.5TPC (int)*
CS-1245-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245-5.5KC (ext) EP-1245-5.5KC (int)*
CS-1245-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1245-5.5 (ext) EP-1245-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1245-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245-5.5KC (ext) EP-1245-5.5TPC (int)
TS-1245-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1245-5.5KC (ext) EP-1245-5.5KC (int)
TS-1245-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1245-5.5 (ext) EP-1245-5.5TPC (int)
TS-1245-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1245-5.5D (ext) P-1245-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1250 FLEUR DE LIS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

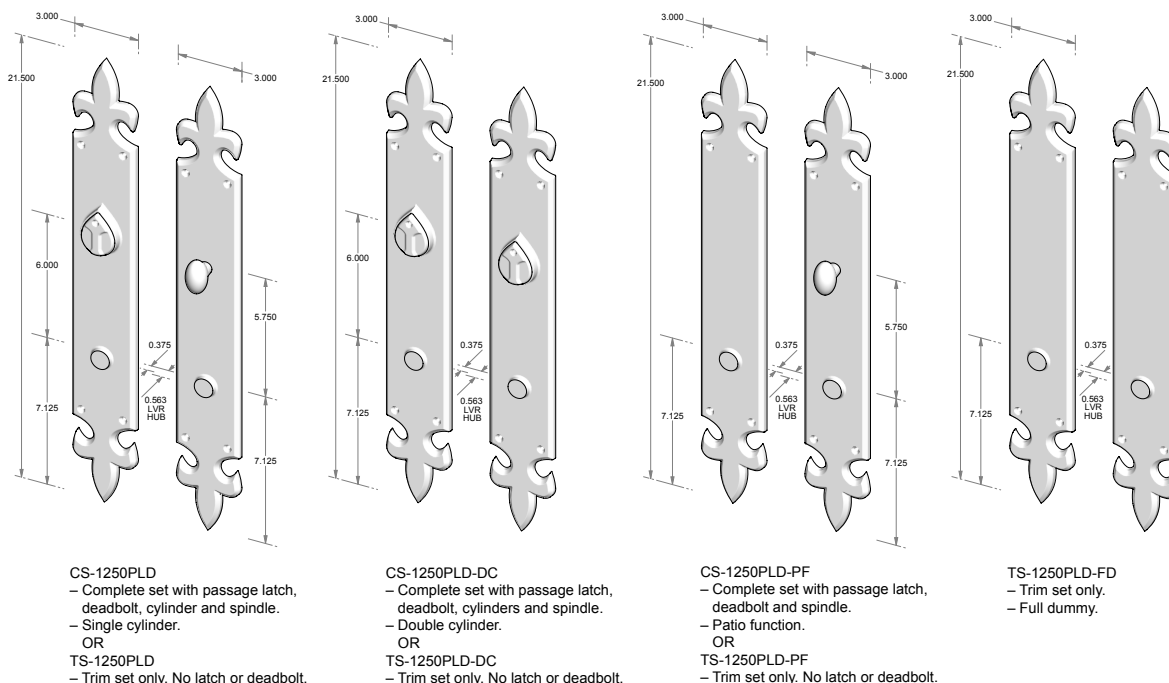

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1250PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250KC (ext) EP-1250TPC (int)*
CS-1250PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250KC (ext) EP-1250KC (int)*
CS-1250PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1250 (ext) EP-1250TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1250PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250KC (ext) EP-1250TPC (int)
TS-1250PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250KC (ext) EP-1250KC (int)
TS-1250PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1250 (ext) EP-1250TPC (int)
TS-1250PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1250D (ext) P-1250D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1250-5.5 FLEUR DE LIS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

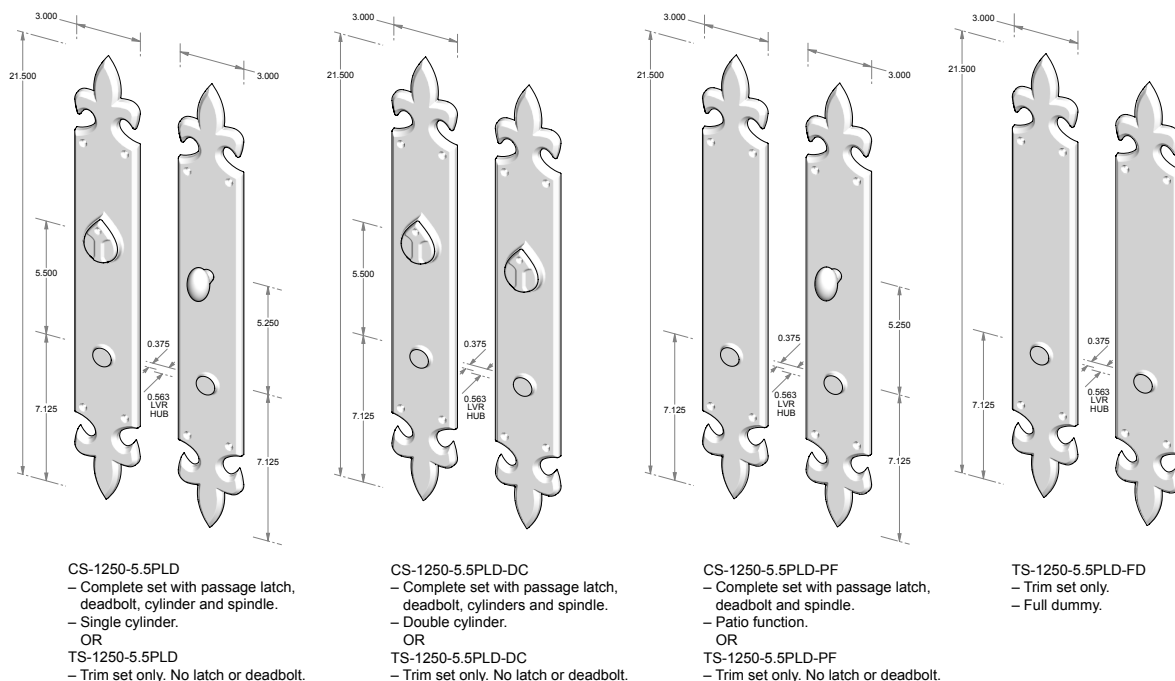

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1250-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250-5.5KC (ext) EP-1250-5.5TPC (int)*
CS-1250-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250-5.5KC (ext) EP-1250-5.5KC (int)*
CS-1250-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-125-5.50 (ext) EP-1250-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1250-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250-5.5KC (ext) EP-1250-5.5TPC (int)
TS-1250-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1250-5.5KC (ext) EP-1250-5.5KC (int)
TS-1250-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1250-5.5 (ext) EP-1250-5.5TPC (int)
TS-1250-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1250-5.5D (ext) P-1250-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




420 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-420PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-300 and TPC-306.
 OR
TS-420PLD
 - Trim set only. No latch or deadbolt.



CS-420PLD-DC
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-300.
 OR
TS-420PLD-DC
 - Trim set only. No latch or deadbolt.

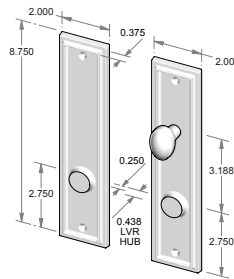

CS-420PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 - Shown with TPC-306.
 OR
TS-420PLD-PF
 - Trim set only. No latch or deadbolt.



TS-420PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-420PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-420KC (ext) EP-420TPC (int)*
CS-420PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-420KC (ext) EP-420KC (int)*
CS-420PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-420 (ext) EP-420TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Will not cover 2.125" bore.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-420PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-420KC (ext) EP-420TPC (int)
TS-420PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-420KC (ext) EP-420KC (int)
TS-420PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-420 (ext) EP-420TPC (int)
TS-420PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-420D (ext) P-420D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

Will not cover 2.125" bore.


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




421 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-421PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-421PLD
 – Trim set only. No latch or deadbolt.



CS-421PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-421PLD-DC
 – Trim set only. No latch or deadbolt.



CS-421PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-421PLD-PF
 – Trim set only. No latch or deadbolt.

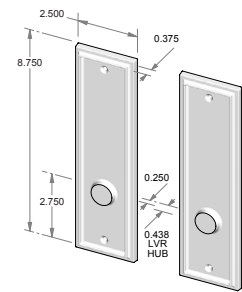

TS-421PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-421PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-421KC (ext) EP-421TPC (int)*
CS-421PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-421KC (ext) EP-421KC (int)*
CS-421PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-421 (ext) EP-421TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-421PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-421KC (ext) EP-421TPC (int)
TS-421PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-421KC (ext) EP-421KC (int)
TS-421PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-421 (ext) EP-421TPC (int)
TS-421PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-421D (ext) P-421D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




422 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-422PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-422PLD
 – Trim set only. No latch or deadbolt.

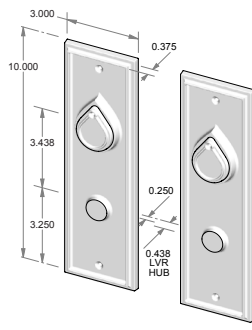

CS-422PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-422PLD-DC
 – Trim set only. No latch or deadbolt.



CS-422PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-422PLD-PF
 – Trim set only. No latch or deadbolt.

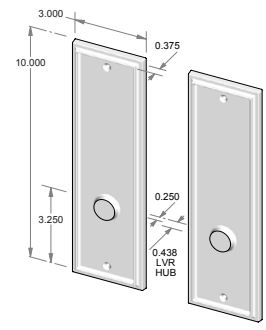

TS-422PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-422PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422KC (ext) EP-422TPC (int)*
CS-422PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422KC (ext) EP-422KC (int)*
CS-422PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-422 (ext) EP-422TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-422PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422KC (ext) EP-422TPC (int)
TS-422PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422KC (ext) EP-422KC (int)
TS-422PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-422 (ext) EP-422TPC (int)
TS-422PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-422D (ext) P-422D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




422-5.5 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-422-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-422-5.5PLD
 – Trim set only. No latch or deadbolt.

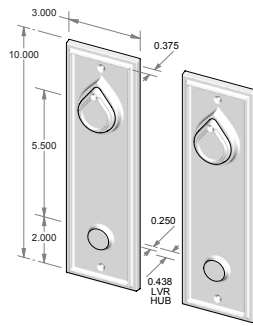

CS-422-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-422-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-422-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-422-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

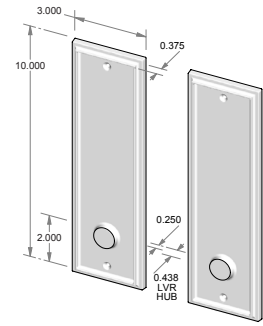

TS-422-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-422-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422-5.5KC (ext) EP-422-5.5TPC (int)*
CS-422-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422-5.5KC (ext) EP-422-5.5KC (int)*
CS-422-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-422-5.5 (ext) EP-422-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-422-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422-5.5KC (ext) EP-422-5.5TPC (int)
TS-422-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-422-5.5KC (ext) EP-422-5.5KC (int)
TS-422-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-422-5.5 (ext) EP-422-5.5TPC (int)
TS-422-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-422-5.5D (ext) P-422-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




423 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

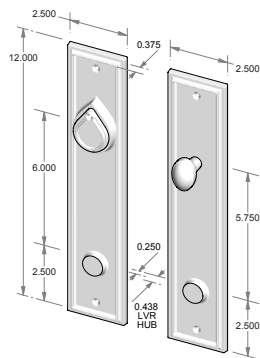


CS-423PLD
 - Complete set with passage latch, deadbolt, cylinder and spindle.
 - Single cylinder.
 - Shown with KC-300 and TPC-306.
 OR
TS-423PLD
 - Trim set only. No latch or deadbolt.

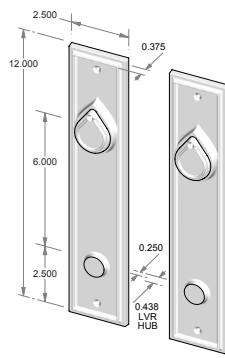

CS-423PLD-DC
 - Complete set with passage latch, deadbolt, cylinders and spindle.
 - Double cylinder.
 - Shown with KC-300.
 OR
TS-423PLD-DC
 - Trim set only. No latch or deadbolt.

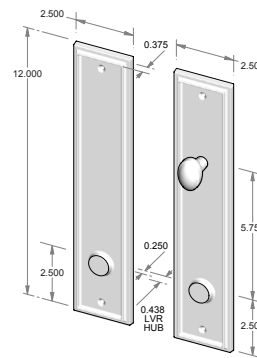

CS-423PLD-PF
 - Complete set with passage latch, deadbolt and spindle.
 - Patio function.
 - Shown with TPC-306.
 OR
TS-423PLD-PF
 - Trim set only. No latch or deadbolt.

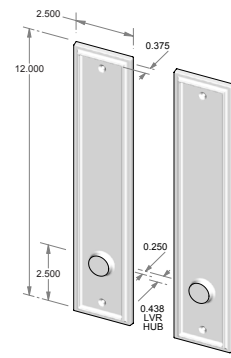

TS-423PLD-FD
 - Trim set only.
 - Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-423PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423KC (ext) EP-423TPC (int)*
CS-423PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423KC (ext) EP-423KC (int)*
CS-423PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-423 (ext) EP-423TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-423PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423KC (ext) EP-423TPC (int)
TS-423PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423KC (ext) EP-423KC (int)
TS-423PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-423 (ext) EP-423TPC (int)
TS-423PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-423D (ext) P-423D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

6.000" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




423-5.5 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

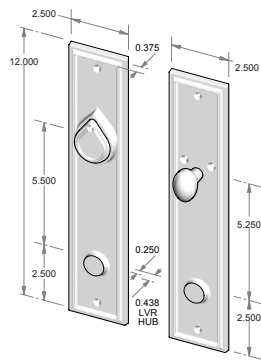


CS-423-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-423-5.5PLD
 – Trim set only. No latch or deadbolt.

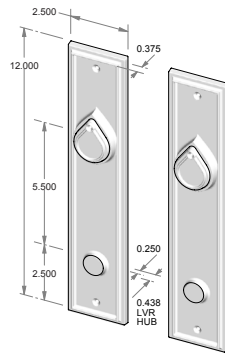

CS-423-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-423-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

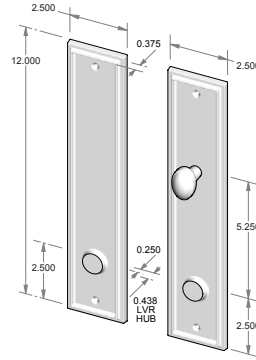

CS-423-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-423-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

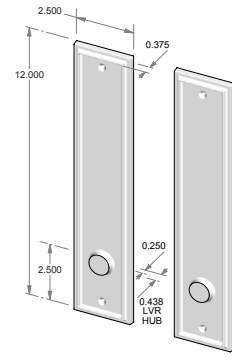

TS-423-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-423-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423-5.5KC (ext) EP-423-5.5TPC (int)*
CS-423-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423-5.5KC (ext) EP-423-5.5KC (int)*
CS-423-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-423-5.5 (ext) EP-423-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-423-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423-5.5KC (ext) EP-423-5.5TPC (int)
TS-423-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-423-5.5KC (ext) EP-423-5.5KC (int)
TS-423-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-423-5.5 (ext) EP-423-5.5TPC (int)
TS-423-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-423-5.5D (ext) P-423-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




424 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

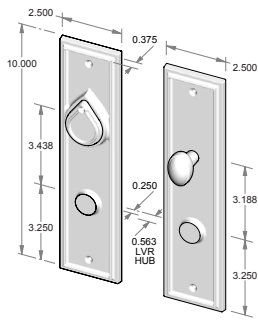


CS-424PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-424PLD
 – Trim set only. No latch or deadbolt.



CS-424PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-424PLD-DC
 – Trim set only. No latch or deadbolt.

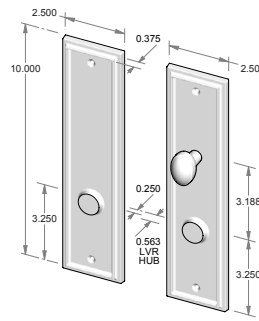

CS-424PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-424PLD-PF
 – Trim set only. No latch or deadbolt.



TS-424PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-424PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-424KC (ext) EP-424TPC (int)*
CS-424PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-424KC (ext) EP-424KC (int)*
CS-424PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-424 (ext) EP-424TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-424PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-424KC (ext) EP-424TPC (int)
TS-424PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-424KC (ext) EP-424KC (int)
TS-424PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-424 (ext) EP-424TPC (int)
TS-424PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-424D (ext) P-424D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



425 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

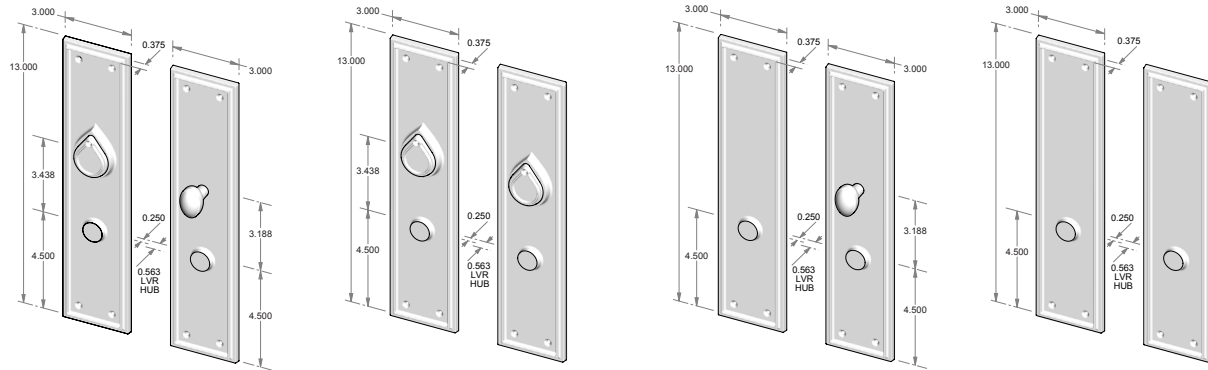

CS-425PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-425PLD
 – Trim set only. No latch or deadbolt.

CS-425PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-425PLD-DC
 – Trim set only. No latch or deadbolt.

CS-425PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-425PLD-PF
 – Trim set only. No latch or deadbolt.

TS-425PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-425PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-425KC (ext) EP-425TPC (int)*
CS-425PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-425KC (ext) EP-425KC (int)*
CS-425PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-425 (ext) EP-425TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-425PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-425KC (ext) EP-425TPC (int)
TS-425PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-425KC (ext) EP-425KC (int)
TS-425PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-425 (ext) EP-425TPC (int)
TS-425PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-425D (ext) P-425D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




426 RIDGE LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-426PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
TS-426PLD
 – Trim set only. No latch or deadbolt.



CS-426PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-300.
 OR
TS-426PLD-DC
 – Trim set only. No latch or deadbolt.



CS-426PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 – Shown with TPC-306.
 OR
TS-426PLD-PF
 – Trim set only. No latch or deadbolt.



TS-426PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-426PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-426KC (ext) EP-426TPC (int)*
CS-426PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-426KC (ext) EP-426KC (int)*
CS-426PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-426 (ext) EP-426TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-426PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-426KC (ext) EP-426TPC (int)
TS-426PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-426KC (ext) EP-426KC (int)
TS-426PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-426 (ext) EP-426TPC (int)
TS-426PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-426D (ext) P-426D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



431 CORRUGATED w/BAND LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

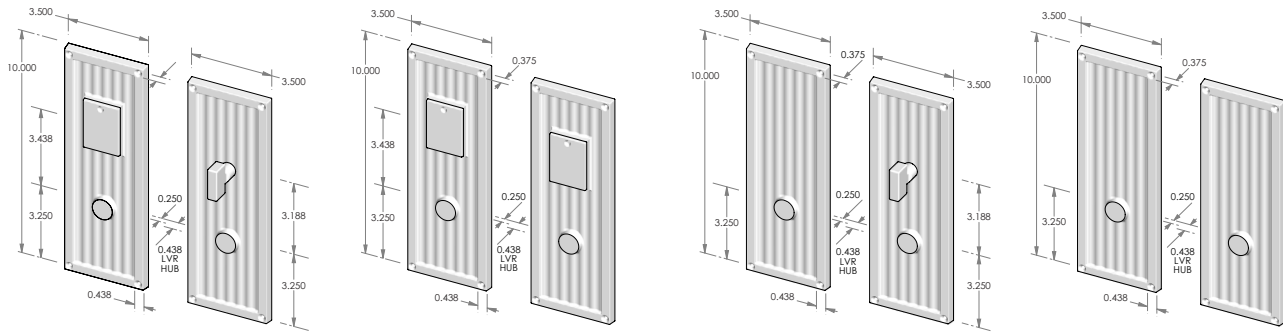

CS-431PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-431PLD
 – Trim set only. No latch or deadbolt.

CS-431PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-431PLD-DC
 – Trim set only. No latch or deadbolt.

CS-431PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-431PLD-PF
 – Trim set only. No latch or deadbolt.

TS-431PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-431PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431KC (ext) EP-431TPC (int)*
CS-431PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431KC (ext) EP-431KC (int)*
CS-431PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-431 (ext) EP-431TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-431PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431KC (ext) EP-431TPC (int)
TS-431PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431KC (ext) EP-431KC (int)
TS-431PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-431 (ext) EP-431TPC (int)
TS-431PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-431D (ext) P-431D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE




431-5.5 CORRUGATED w/BAND LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-431-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-431-5.5PLD
 – Trim set only. No latch or deadbolt.



CS-431-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-431-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

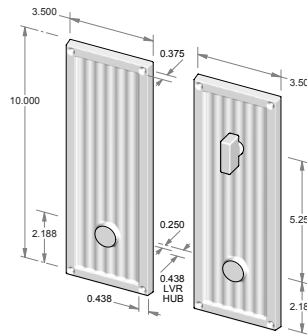

CS-431-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-431-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

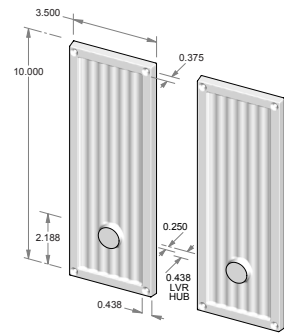

TS-431-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-431-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431-5.5KC (ext) EP-431-5.5TPC (int)*
CS-431-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431-5.5KC (ext) EP-431-5.5KC (int)*
CS-431-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-431-5.5 (ext) EP-431-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-431-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431-5.5KC (ext) EP-431-5.5TPC (int)
TS-431-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-431-5.5KC (ext) EP-431-5.5KC (int)
TS-431-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-431-5.5 (ext) EP-431-5.5TPC (int)
TS-431-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-431-5.5D (ext) P-431-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




440 HAMPTON LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-440PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-440PLD
 – Trim set only. No latch or deadbolt.

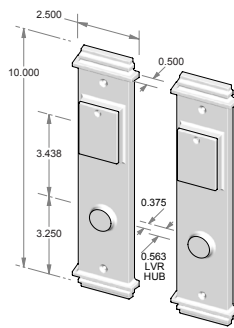

CS-440PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-440PLD-DC
 – Trim set only. No latch or deadbolt.



CS-440PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-440PLD-PF
 – Trim set only. No latch or deadbolt.

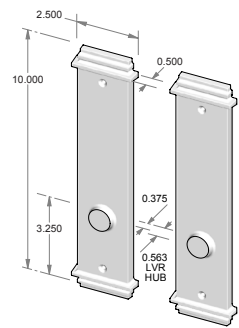

TS-440PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-440PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-440KC (ext) EP-440TPC (int)*
CS-440PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-440KC (ext) EP-440KC (int)*
CS-440PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-440 (ext) EP-440TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-440PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-440KC (ext) EP-440TPC (int)
TS-440PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-440KC (ext) EP-440KC (int)
TS-440PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-440 (ext) EP-440TPC (int)
TS-440PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-440D (ext) P-440D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



441 HAMPTON LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

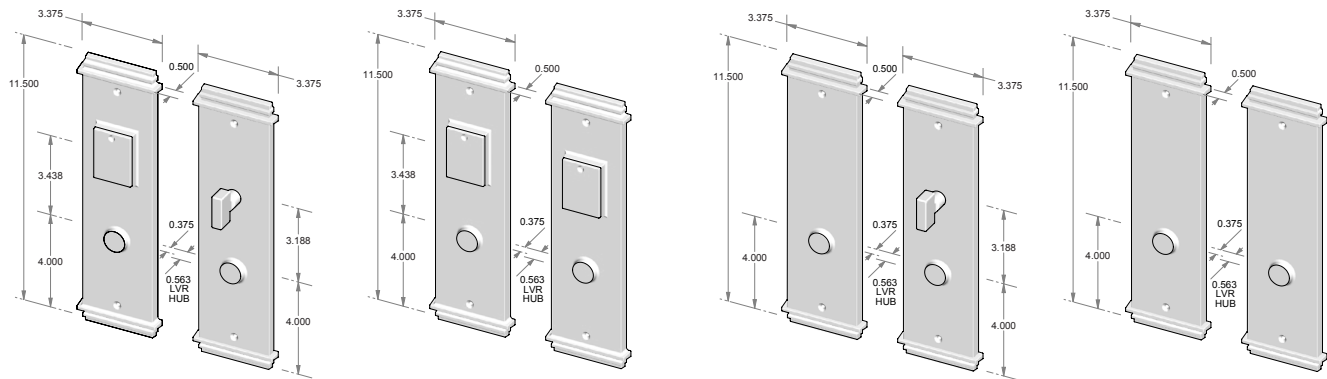

CS-441PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-441PLD
 – Trim set only. No latch or deadbolt.

CS-441PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-441PLD-DC
 – Trim set only. No latch or deadbolt.

CS-441PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-441PLD-PF
 – Trim set only. No latch or deadbolt.

TS-441PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-441PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441KC (ext) EP-441TPC (int)*
CS-441PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441KC (ext) EP-441KC (int)*
CS-441PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-441 (ext) EP-441TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-441PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441KC (ext) EP-441TPC (int)
TS-441PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441KC (ext) EP-441KC (int)
TS-441PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-441 (ext) EP-441TPC (int)
TS-441PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-441D (ext) P-441D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



441-5.5 HAMPTON LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

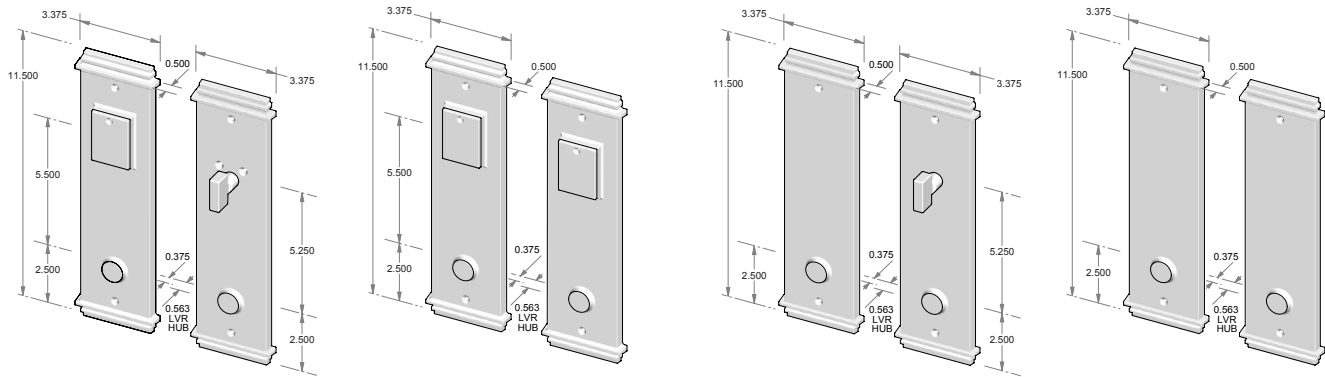

CS-441-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-441-5.5PLD
 – Trim set only. No latch or deadbolt.

CS-441-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-441-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

CS-441-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-441-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

TS-441-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-441-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441-5.5KC (ext) EP-441-5.5TPC (int)*
CS-441-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441-5.5KC (ext) EP-441-5.5KC (int)*
CS-441-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-441-5.5 (ext) EP-441-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-441-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441-5.5KC (ext) EP-441-5.5TPC (int)
TS-441-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-441-5.5KC (ext) EP-441-5.5KC (int)
TS-441-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-441-5.5 (ext) EP-441-5.5TPC (int)
TS-441-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-441-5.5D (ext) P-441-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



451 TRELLIS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

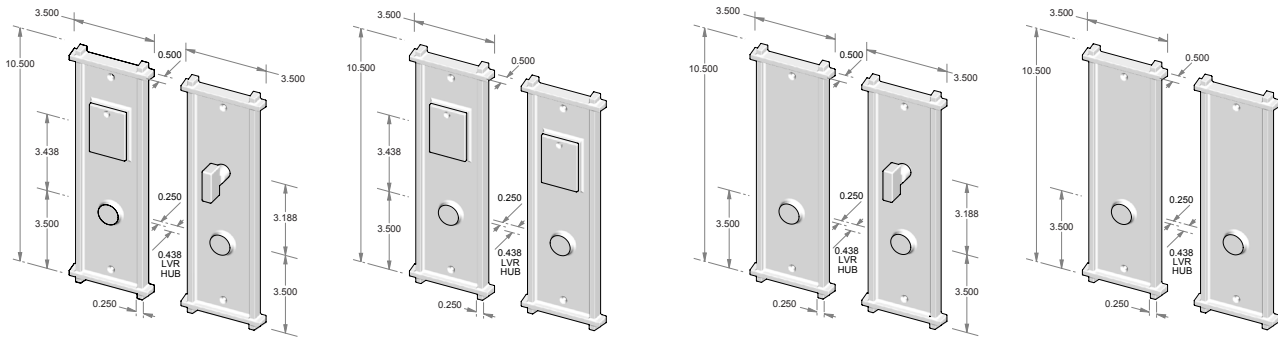

CS-451PLD

– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.

OR

TS-451PLD

– Trim set only. No latch or deadbolt.

CS-451PLD-DC

– Complete set with passage latch, deadbolt, cylinders and spindle.
– Double cylinder.

OR

TS-451PLD-DC

– Trim set only. No latch or deadbolt.

CS-451PLD-PF

– Complete set with passage latch, deadbolt and spindle.
– Patio function.

OR

TS-451PLD-PF

– Trim set only. No latch or deadbolt.

TS-451PLD-FD

– Trim set only.
– Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-451PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451KC (ext) EP-451TPC (int)*
CS-451PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451KC (ext) EP-451KC (int)*
CS-451PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-451 (ext) EP-451TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-451PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451KC (ext) EP-451TPC (int)
TS-451PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451KC (ext) EP-451KC (int)
TS-451PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-451 (ext) EP-451TPC (int)
TS-451PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-451D (ext) P-451D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




451-5.5 TRELLIS LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

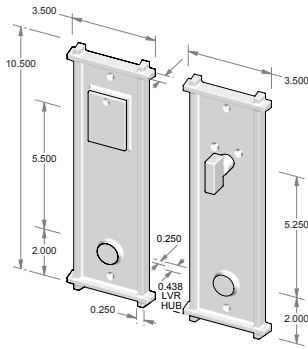


CS-451-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-451-5.5PLD
 – Trim set only. No latch or deadbolt.



CS-451-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-451-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-451-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-451-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

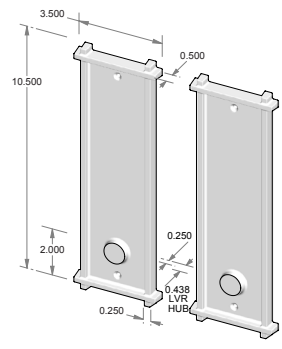

TS-451-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-451-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451-5.5KC (ext) EP-451-5.5TPC (int)*
CS-451-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451-5.5KC (ext) EP-451-5.5KC (int)*
CS-451-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-451-5.5 (ext) EP-451-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-451-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451-5.5KC (ext) EP-451-5.5TPC (int)
TS-451-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-451-5.5KC (ext) EP-451-5.5KC (int)
TS-451-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-451-5.5 (ext) EP-451-5.5TPC (int)
TS-451-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-451-5.5D (ext) P-451-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



461 DECO LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

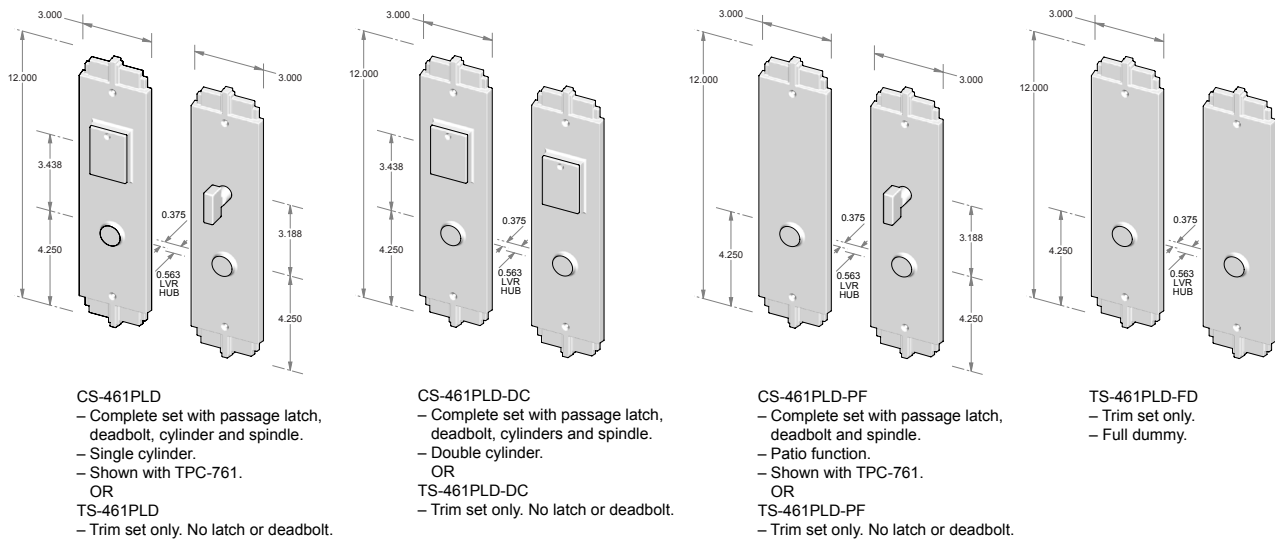

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-461PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-461KC (ext) EP-461TPC (int)*
CS-461PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-461KC (ext) EP-461KC (int)*
CS-461PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-461 (ext) EP-461TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-461PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-461KC (ext) EP-461TPC (int)
TS-461PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-461KC (ext) EP-461KC (int)
TS-461PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-461 (ext) EP-461TPC (int)
TS-461PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-461D (ext) P-461D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1408 CORRUGATED LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-1408PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1408PLD
 – Trim set only. No latch or deadbolt.

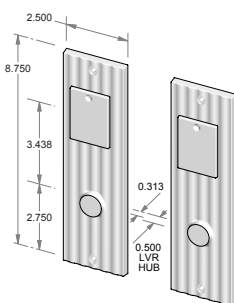

CS-1408PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1408PLD-DC
 – Trim set only. No latch or deadbolt.

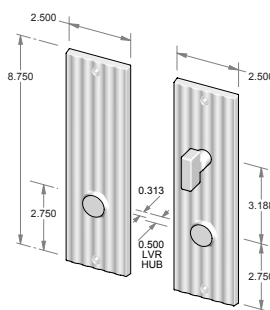

CS-1408PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1408PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1408PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1408KC (ext) EP-1408TPC (int)*
CS-1408PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1408KC (ext) EP-1408KC (int)*
CS-1408PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1408 (ext) EP-1408TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1408KC (ext) EP-1408TPC (int)
TS-1408PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1408KC (ext) EP-1408KC (int)
TS-1408PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1408 (ext) EP-1408TPC (int)
TS-1408PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1408D (ext) P-1408D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1410 CORRUGATED LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

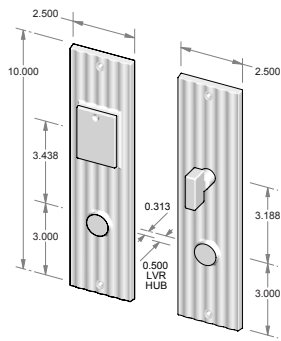


CS-1410PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1410PLD
 – Trim set only. No latch or deadbolt.



CS-1410PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1410PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1410PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1410PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1410PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410KC (ext) EP-1410TPC (int)*
CS-1410PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410KC (ext) EP-1410KC (int)*
CS-1410PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1410 (ext) EP-1410TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410KC (ext) EP-1410TPC (int)
TS-1410PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410KC (ext) EP-1410KC (int)
TS-1410PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1410 (ext) EP-1410TPC (int)
TS-1410PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1410D (ext) P-1410D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1410-5.5 CORRUGATED LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

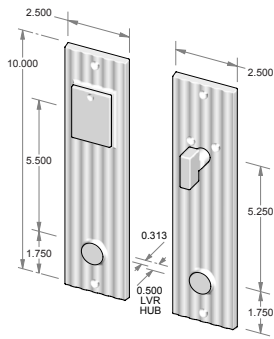


CS-1410-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1410-5.5PLD
 – Trim set only. No latch or deadbolt.

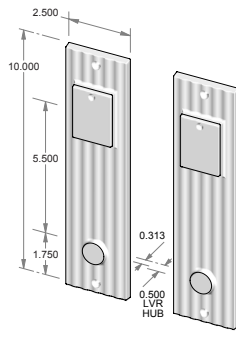

CS-1410-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1410-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1410-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1410-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1410-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1410-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410-5.5KC (ext) EP-1410-5.5TPC (int)*
CS-1410-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410-5.5KC (ext) EP-1410-5.5KC (int)*
CS-1410-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1410-5.5 (ext) EP-1410-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1410-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410-5.5KC (ext) EP-1410-5.5TPC (int)
TS-1410-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1410-5.5KC (ext) EP-1410-5.5KC (int)
TS-1410-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1410-5.5 (ext) EP-1410-5.5TPC (int)
TS-1410-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1410-5.5D (ext) P-1410-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1510 BANDBOX LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-1510PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1510PLD
 – Trim set only. No latch or deadbolt.



CS-1510PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1510PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1510PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1510PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1510PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1510PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510KC (ext) EP-1510TPC (int)*
CS-1510PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510KC (ext) EP-1510KC (int)*
CS-1510PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1510 (ext) EP-1510TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1510PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510KC (ext) EP-1510TPC (int)
TS-1510PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510KC (ext) EP-1510KC (int)
TS-1510PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1510 (ext) EP-1510TPC (int)
TS-1510PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1510D (ext) P-1510D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1510-5.5 BANDBOX LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

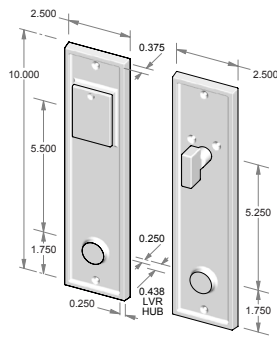


CS-1510-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1510-5.5PLD
 – Trim set only. No latch or deadbolt.



CS-1510-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1510-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1510-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1510-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1510-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1510-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510-5.5KC (ext) EP-1510-5.5TPC (int)*
CS-1510-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510-5.5KC (ext) EP-1510-5.5KC (int)*
CS-1510-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1510-5.5 (ext) EP-1510-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1510-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510-5.5KC (ext) EP-1510-5.5TPC (int)
TS-1510-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1510-5.5KC (ext) EP-1510-5.5KC (int)
TS-1510-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1510-5.5 (ext) EP-1510-5.5TPC (int)
TS-1510-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1510-5.5D (ext) P-1510-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1511 BANDBOX LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-1511PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1511PLD
 – Trim set only. No latch or deadbolt.



CS-1511PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1511PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1511PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1511PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1511PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1511PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1511KC (ext) EP-1511TPC (int)*
CS-1511PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1511KC (ext) EP-1511KC (int)*
CS-1511PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1511 (ext) EP-1511TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1511PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1511KC (ext) EP-1511TPC (int)
TS-1511PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1511KC (ext) EP-1511KC (int)
TS-1511PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1511 (ext) EP-1511TPC (int)
TS-1511PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1511D (ext) P-1511D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1512 BANDBOX LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

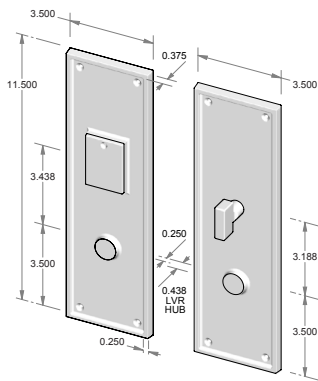


CS-1512PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-1512PLD
 – Trim set only. No latch or deadbolt.

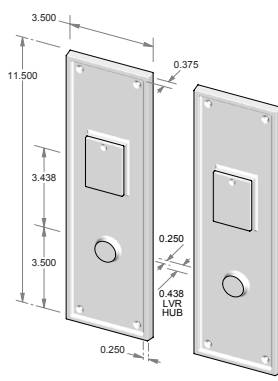

CS-1512PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-1512PLD-DC
 – Trim set only. No latch or deadbolt.

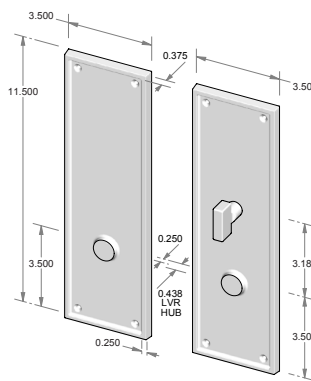

CS-1512PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1512PLD-PF
 – Trim set only. No latch or deadbolt.

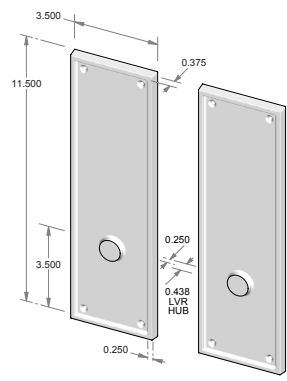

TS-1512PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1512PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512KC (ext) EP-1512TPC (int)*
CS-1512PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512KC (ext) EP-1512KC (int)*
CS-1512PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1512 (ext) EP-1512TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1512PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512KC (ext) EP-1512TPC (int)
TS-1512PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512KC (ext) EP-1512KC (int)
TS-1512PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1512 (ext) EP-1512TPC (int)
TS-1512PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1512D (ext) P-1512D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1512-5.5 BANDBOX LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

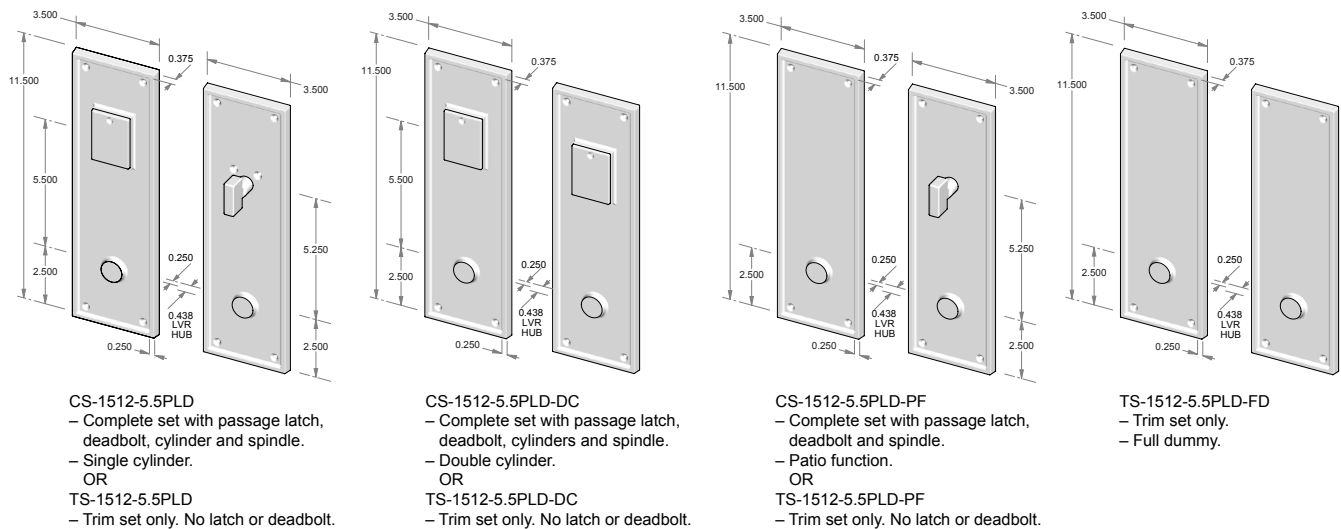

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1512-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512-5.5KC (ext) EP-1512-5.5TPC (int)*
CS-1512-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512-5.5KC (ext) EP-1512-5.5KC (int)*
CS-1512-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1512-5.5 (ext) EP-1512-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1512-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512-5.5KC (ext) EP-1512-5.5TPC (int)
TS-1512-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1512-5.5KC (ext) EP-1512-5.5KC (int)
TS-1512-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1512-5.5 (ext) EP-1512-5.5TPC (int)
TS-1512-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1512-5.5D (ext) P-1512-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1516 BANDBOX LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

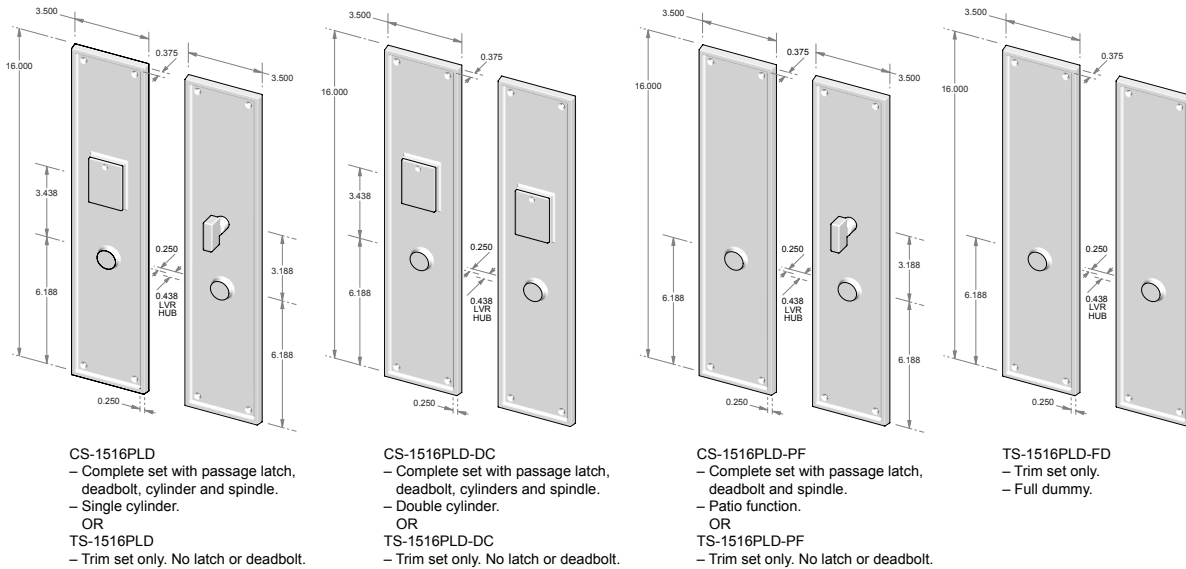

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1516PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1516KC (ext) EP-1516TPC (int)*
CS-1516PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1516KC (ext) EP-1516KC (int)*
CS-1516PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1516 (ext) EP-1516TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1516PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1516KC (ext) EP-1516TPC (int)
TS-1516PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1516KC (ext) EP-1516KC (int)
TS-1516PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1516 (ext) EP-1516TPC (int)
TS-1516PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1516D (ext) P-1516D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1908 CORDUROY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

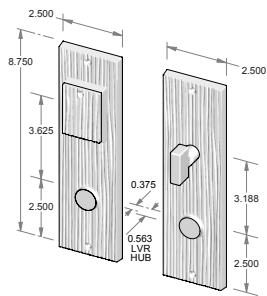


CS-1908PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-1900.
 OR
TS-1908PLD
 – Trim set only. No latch or deadbolt.

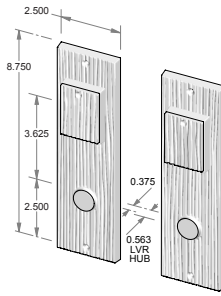

CS-1908PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-1900.
 OR
TS-1908PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1908PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1908PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1908PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1908PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1908KC (ext) EP-1908TPC (int)*
CS-1908PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1908KC (ext) EP-1908KC (int)*
CS-1908PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1908 (ext) EP-1908TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1908PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1908KC (ext) EP-1908TPC (int)
TS-1908PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1908KC (ext) EP-1908KC (int)
TS-1908PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1908 (ext) EP-1908TPC (int)
TS-1908PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1908D (ext) P-1908D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1910 CORDUROY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

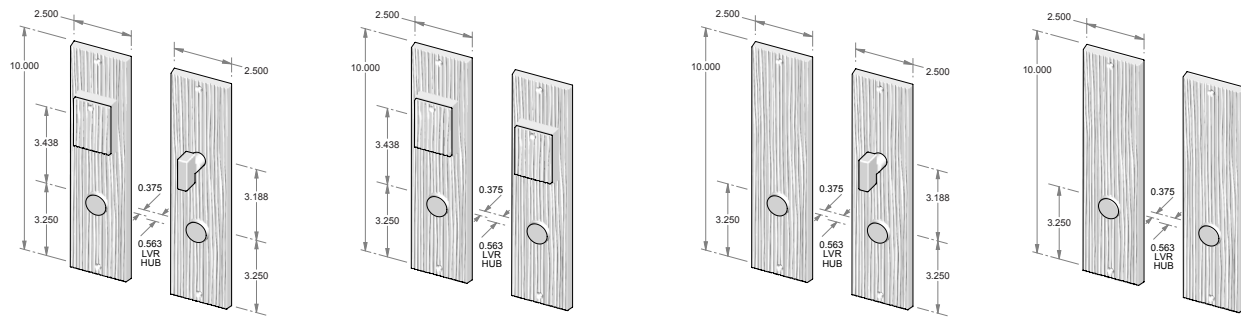

CS-1910PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-1900.
 OR
TS-1910PLD
 – Trim set only. No latch or deadbolt.

CS-1910PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-1900.
 OR
TS-1910PLD-DC
 – Trim set only. No latch or deadbolt.

CS-1910PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1910PLD-PF
 – Trim set only. No latch or deadbolt.

TS-1910PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1910PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910KC (ext) EP-1910TPC (int)*
CS-1910PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910KC (ext) EP-1910KC (int)*
CS-1910PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1910 (ext) EP-1910TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1910PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910KC (ext) EP-1910TPC (int)
TS-1910PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910KC (ext) EP-1910KC (int)
TS-1910PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1910 (ext) EP-1910TPC (int)
TS-1910PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1910D (ext) P-1910D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




1910-5.5 CORDUROY LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-1910-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-1900.
 OR
TS-1910-5.5PLD
 – Trim set only. No latch or deadbolt.



CS-1910-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-1900.
 OR
TS-1910-5.5PLD-DC
 – Trim set only. No latch or deadbolt.



CS-1910-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1910-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-1910-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1910-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910-5.5KC (ext) EP-1910-5.5TPC (int)*
CS-1910-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910-5.5KC (ext) EP-1910-5.5KC (int)*
CS-1910-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1910-5.5 (ext) EP-1910-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1910-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910-5.5KC (ext) EP-1910-5.5TPC (int)
TS-1910-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1910-5.5KC (ext) EP-1910-5.5KC (int)
TS-1910-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1910-5.5 (ext) EP-1910-5.5TPC (int)
TS-1910-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1910-5.5D (ext) P-1910-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1912 CORDUROY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

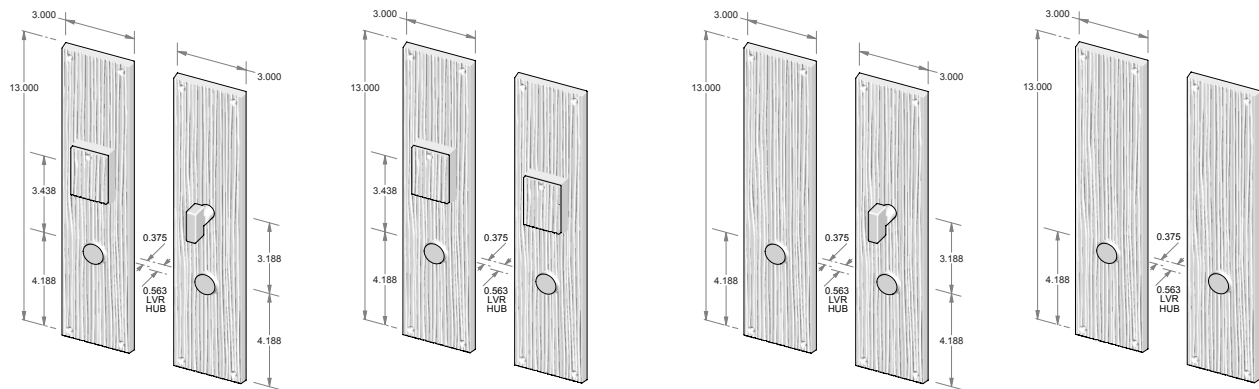

CS-1912PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-1900.
 OR
TS-1912PLD
 – Trim set only. No latch or deadbolt.

CS-1912PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-1900.
 OR
TS-1912PLD-DC
 – Trim set only. No latch or deadbolt.

CS-1912PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-1912PLD-PF
 – Trim set only. No latch or deadbolt.

TS-1912PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1912PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1912KC (ext) EP-1912TPC (int)*
CS-1912PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1912KC (ext) EP-1912KC (int)*
CS-1912PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1912 (ext) EP-1912TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1912PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1912KC (ext) EP-1912TPC (int)
TS-1912PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1912KC (ext) EP-1912KC (int)
TS-1912PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1912 (ext) EP-1912TPC (int)
TS-1912PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1912D (ext) P-1912D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1913 CORDUROY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

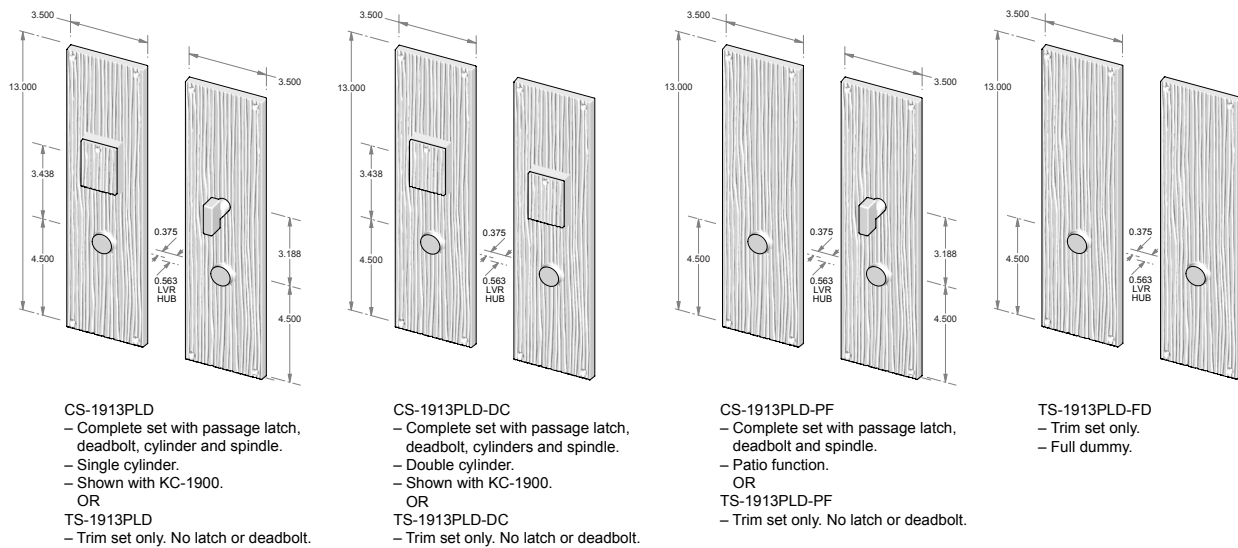

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1913PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1913KC (ext) EP-1913TPC (int)*
CS-1913PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1913KC (ext) EP-1913KC (int)*
CS-1913PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1913 (ext) EP-1913TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1913PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1913KC (ext) EP-1913TPC (int)
TS-1913PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1913KC (ext) EP-1913KC (int)
TS-1913PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1913 (ext) EP-1913TPC (int)
TS-1913PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1913D (ext) P-1913D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



1922 CORDUROY LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

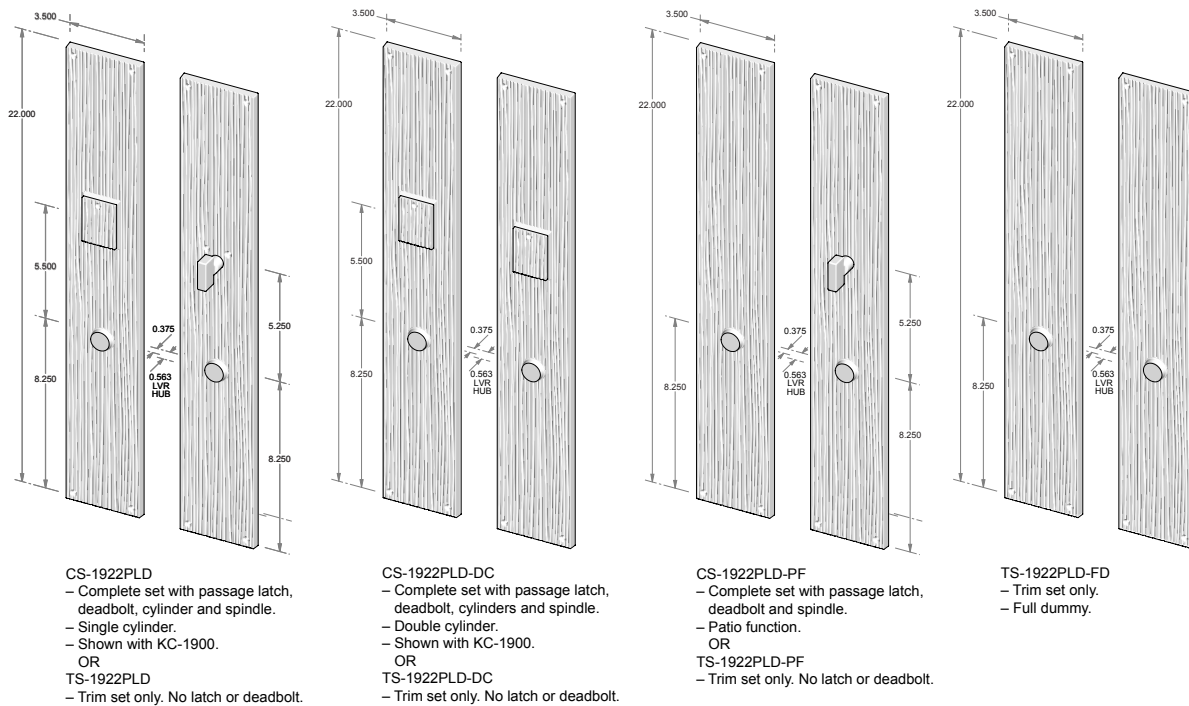

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-1922PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1922KC (ext) EP-1922TPC (int)*
CS-1922PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1922KC (ext) EP-1922KC (int)*
CS-1922PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1922 (ext) EP-1922TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-1922PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1922KC (ext) EP-1922TPC (int)
TS-1922PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-1922KC (ext) EP-1922KC (int)
TS-1922PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-1922 (ext) EP-1922TPC (int)
TS-1922PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-1922D (ext) P-1922D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2107 MESA LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-2107PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-2107PLD
 – Trim set only. No latch or deadbolt.



CS-2107PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-2107PLD-DC
 – Trim set only. No latch or deadbolt.

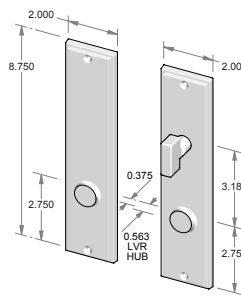

CS-2107PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2107PLD-PF
 – Trim set only. No latch or deadbolt.



TS-2107PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2107PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2107KC (ext) EP-2107TPC (int)*
CS-2107PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2107KC (ext) EP-2107KC (int)*
CS-2107PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2107 (ext) EP-2107TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

***Will not cover 2.125" bore.**

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2107PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2107KC (ext) EP-2107TPC (int)
TS-2107PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2107KC (ext) EP-2107KC (int)
TS-2107PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2107 (ext) EP-2107TPC (int)
TS-2107PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2107D (ext) P-2107D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

***Will not cover 2.125" bore.**


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2108 MESA LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

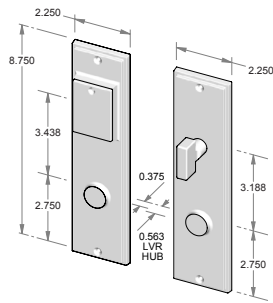


CS-2108PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-2108PLD
 – Trim set only. No latch or deadbolt.



CS-2108PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-2108PLD-DC
 – Trim set only. No latch or deadbolt.

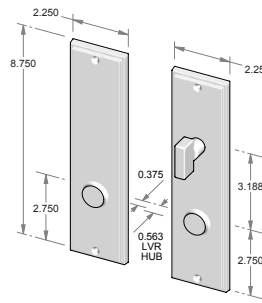

CS-2108PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2108PLD-PF
 – Trim set only. No latch or deadbolt.



TS-2108PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2108PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2108KC (ext) EP-2108TPC (int)*
CS-2108PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2108KC (ext) EP-2108KC (int)*
CS-2108PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2108 (ext) EP-2108TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

**Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2108PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2108KC (ext) EP-2108TPC (int)
TS-2108PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2108KC (ext) EP-2108KC (int)
TS-2108PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2108 (ext) EP-2108TPC (int)
TS-2108PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2108D (ext) P-2108D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2110 MESA LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

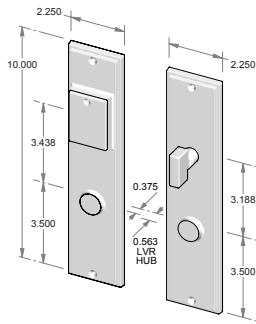


CS-2110PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-2110PLD
 – Trim set only. No latch or deadbolt.

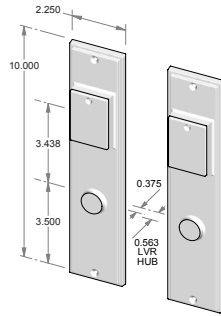

CS-2110PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-2110PLD-DC
 – Trim set only. No latch or deadbolt.

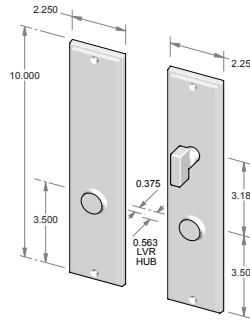

CS-2110PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2110PLD-PF
 – Trim set only. No latch or deadbolt.



TS-2110PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2110PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2110KC (ext) EP-2110TPC (int)*
CS-2110PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2110KC (ext) EP-2110KC (int)*
CS-2110PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2110 (ext) EP-2110TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2110PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2110KC (ext) EP-2110TPC (int)
TS-2110PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2110KC (ext) EP-2110KC (int)
TS-2110PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2110 (ext) EP-2110TPC (int)
TS-2110PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2110D (ext) P-2110D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



2111 MESA LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

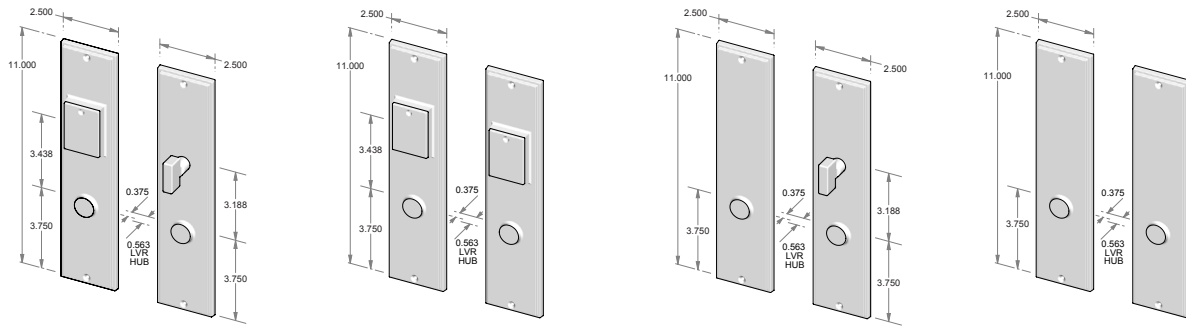

CS-2111PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-2111PLD
 – Trim set only. No latch or deadbolt.

CS-2111PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-2111PLD-DC
 – Trim set only. No latch or deadbolt.

CS-2111PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2111PLD-PF
 – Trim set only. No latch or deadbolt.

TS-2111PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2111PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111KC (ext) EP-2111TPC (int)*
CS-2111PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111KC (ext) EP-2111KC (int)*
CS-2111PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2111 (ext) EP-2111TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2111PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111KC (ext) EP-2111TPC (int)
TS-2111PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111KC (ext) EP-2111KC (int)
TS-2111PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2111 (ext) EP-2111TPC (int)
TS-2111PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2111D (ext) P-2111D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2111-5.5 MESA LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-2111-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-2111-5.5PLD
 – Trim set only. No latch or deadbolt.



CS-2111-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-2111-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

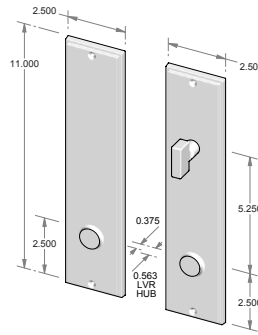

CS-2111-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2111-5.5PLD-PF
 – Trim set only. No latch or deadbolt.



TS-2111-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2111-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111-5.5KC (ext) EP-2111-5.5TPC (int)*
CS-2111-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111-5.5KC (ext) EP-2111-5.5KC (int)*
CS-2111-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2111-5.5 (ext) EP-2111-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2111-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111-5.5KC (ext) EP-2111-5.5TPC (int)
TS-2111-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2111-5.5KC (ext) EP-2111-5.5KC (int)
TS-2111-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2111-5.5 (ext) EP-2111-5.5TPC (int)
TS-2111-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2111-5.5D (ext) P-2111-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2208 BURLAP LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




- CS-2208PLD**
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-2200.
 OR
TS-2208PLD
 – Trim set only. No latch or deadbolt.



- CS-2208PLD-DC**
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-2200.
 OR
TS-2208PLD-DC
 – Trim set only. No latch or deadbolt.



- CS-2208PLD-PF**
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2208PLD-PF
 – Trim set only. No latch or deadbolt.



- TS-2208PLD-FD**
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2208PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2208KC-2200 (ext) EP-2208TPC (int)*
CS-2208PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2208KC-2200 (ext) EP-2208KC-2200 (int)*
CS-2208PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2208 (ext) EP-2208TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2208PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2208KC-2200 (ext) EP-2208TPC (int)
TS-2208PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2208KC-2200 (ext) EP-2208KC-2200 (int)
TS-2208PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2208 (ext) EP-2208TPC (int)
TS-2208PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2208D (ext) P-2208D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2210 BURLAP LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

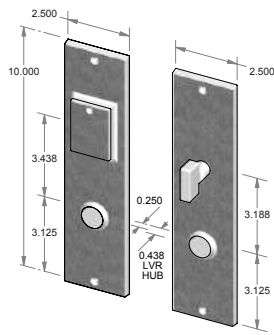


CS-2210PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-2200.
 OR
TS-2210PLD
 – Trim set only. No latch or deadbolt.



CS-2210PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-2200.
 OR
TS-2210PLD-DC
 – Trim set only. No latch or deadbolt.



CS-2210PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2210PLD-PF
 – Trim set only. No latch or deadbolt.



TS-2210PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2210PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210KC-2200 (ext) EP-2210TPC (int)*
CS-2210PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210KC-2200 (ext) EP-2210KC-2200 (int)*
CS-2210PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2210 (ext) EP-2210TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2210PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210KC-2200 (ext) EP-2210TPC (int)
TS-2210PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210KC-2200 (ext) EP-2210KC-2200 (int)
TS-2210PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2210 (ext) EP-2210TPC (int)
TS-2210PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2210D (ext) P-2210D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2210-5.5 BURLAP LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-2210-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 – Shown with KC-2200.
 OR
TS-2210-5.5PLD
 – Trim set only. No latch or deadbolt.

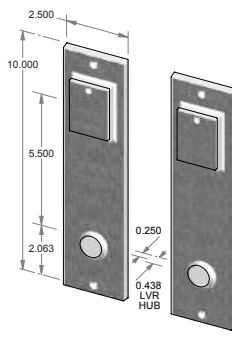

CS-2210-5.5PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – Shown with KC-2200.
 OR
TS-2210-5.5PLD-DC
 – Trim set only. No latch or deadbolt.

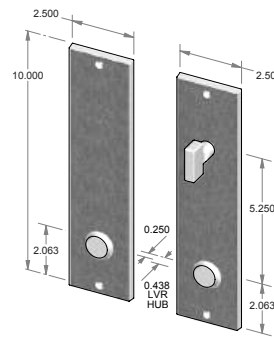

CS-2210-5.5PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2210-5.5PLD-PF
 – Trim set only. No latch or deadbolt.

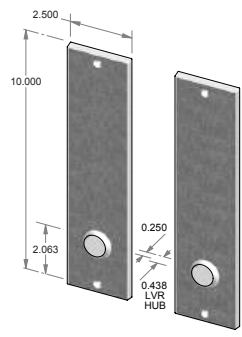

TS-2210-5.5PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2210-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210-5.5KC-2200 (ext) EP-2210-5.5TPC (int)*
CS-2210-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210-5.5KC-2200 (ext) EP-2210-5.5KC-2200 (int)*
CS-2210-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2210-5.5 (ext) EP-2210-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2210-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210-5.5KC-2200 (ext) EP-2210-5.5TPC (int)
TS-2210-5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2210-5.5KC-2200 (ext) EP-2210-5.5KC-2200 (int)
TS-2210-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-2210-5.5 (ext) EP-2210-5.5TPC (int)
TS-2210-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2210-5.5D (ext) P-2210-5.5D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



N950 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

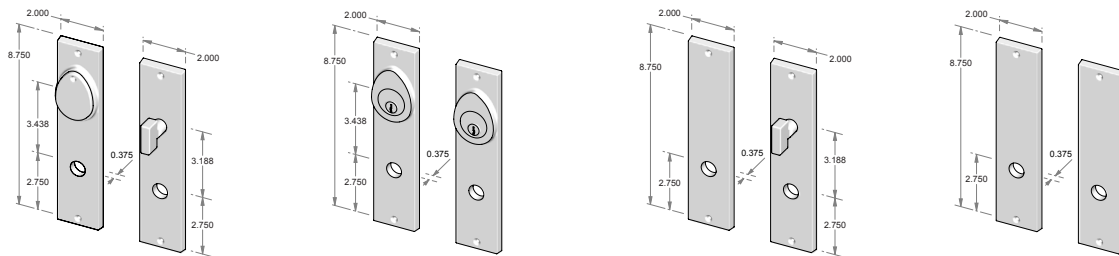

CS-N950PLD
– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-N950PLD
– Trim set only. No no latch or deadbolt.

CS-N950PLD-DC-NKC*
– Complete set with passage latch, deadbolt, cylinders and spindle.
– Double cylinder.
– *Shown without key cover. Must be specified NKC.
OR
TS-N950PLD-DC-NKC
– Trim set only. No no latch or deadbolt.

CS-N950PLD-PF
– Complete set with passage latch, deadbolt and spindle.
– Patio function.
OR
TS-N950PLD-PF
– Trim set only. No no latch or deadbolt.

TS-N950PLD-FD
– Trim set only.
– Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N950PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N950KC (ext) EP-N950TPC (int)*
CS-N950PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N950NKC (ext) EP-N950NKC (int)*
CS-N950PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N950 (ext) EP-N950TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.
3.438" center-to-center spacing.
Door handing and thickness is required for all lever/knob deadbolt entry sets.
Always specify lever/knob design.
All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N950PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N950KC (ext) EP-N950TPC (int)
TS-N950PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N950NKC (ext) EP-N950NKC (int)
TS-N950PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N950 (ext) EP-N950TPC (int)
TS-N950PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N950D (ext) P-N950D (int)


Specify manufacturer and function of lock to be used.
2.375" or 2.750" backset standard.
1.375" minimum door thickness.
3.438" center-to-center spacing.
Door handing and thickness is required for all lever/knob deadbolt entry sets.
Always specify lever/knob design.
All functions available without key cover. Add NKC to part number.
***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N951 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-N951PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-N951PLD
 – Trim set only. No latch or deadbolt.



CS-N951PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-N951PLD-DC-NKC
 – Trim set only. No latch or deadbolt.



CS-N951PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-N951PLD-PF
 – Trim set only. No latch or deadbolt.



TS-N951PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N951PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N951KC (ext) EP-N951TPC (int)*
CS-N951PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N951NKC (ext) EP-N951NKC (int)*
CS-N951PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N951 (ext) EP-N951TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

***Will not cover 2.125" bore.**

****Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.**

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N951PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N951KC (ext) EP-N951TPC (int)
TS-N951PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N951NKC (ext) EP-N951NKC (int)
TS-N951PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N951 (ext) EP-N951TPC (int)
TS-N951PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N951D (ext) P-N951D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.


***Will not cover 2.125" bore.**

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



N952 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

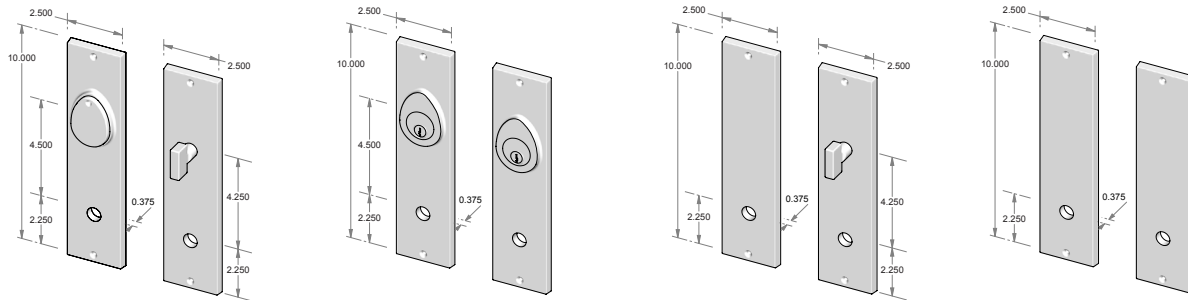

CS-N952PLD

- Complete set with passage latch, deadbolt, cylinder and spindle.
- Single cylinder.
- OR
- TS-N952PLD
- Trim set only. No latch or deadbolt.

CS-N952PLD-DC-NKC*

- Complete set with passage latch, deadbolt, cylinders and spindle.
- Double cylinder.
- *Shown without key cover. Must be specified NKC.
- OR
- TS-N952PLD-DC-NKC
- Trim set only. No latch or deadbolt.

CS-N952PLD-PF

- Complete set with passage latch, deadbolt and spindle.
- Patio function.
- OR
- TS-N952PLD-PF
- Trim set only. No latch or deadbolt.

TS-N952PLD-FD

- Trim set only.
- Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N952PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952KC (ext) EP-N952TPC (int)*
CS-N952PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952NKC (ext) EP-N952NKC (int)*
CS-N952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N952 (ext) EP-N952TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N952PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952KC (ext) EP-N952TPC (int)
TS-N952PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952NKC (ext) EP-N952NKC (int)
TS-N952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N952 (ext) EP-N952TPC (int)
TS-N952PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N952D (ext) P-N952D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

4.500" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N952R NOVUS LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

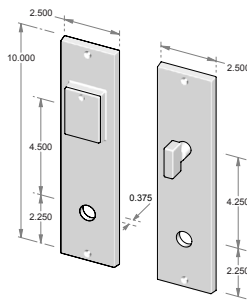


CS-N952R-PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-N952R-PLD
 – Trim set only. No latch or deadbolt.



CS-N952R-PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-N952R-PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

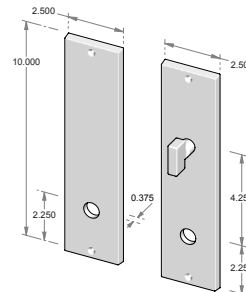

CS-N952PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-N952PLD-PF
 – Trim set only. No latch or deadbolt.

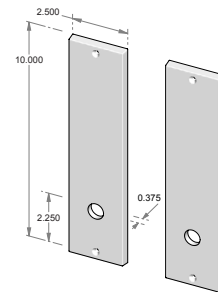

TS-N952PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N952R5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-N952R5.5-KC (ext) EP-N952-5.5TPC (int)*
CS-N952R5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-N952R5.5-NKC (ext) EP-N952R5.5-NKC (int)*
CS-N952-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N952-5.5 (ext) EP-N952-5.5TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

- 1.375" minimum door thickness.
- 4.500" center-to-center spacing.
- Door handing and thickness is required for all lever/knob deadbolt entry sets.
- Always specify lever/knob design.
- All functions available without key cover. Add NKC to part number.
- *Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N952R5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-N952R5.5-KC (ext) EP-N952-5.5TPC (int)
TS-N952R5.5PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set w/rectangular cylinder hub. EP-N952R5.5-NKC (ext) EP-N952R5.5-NKC (int)
TS-N952-5.5PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N952-5.5 (ext) EP-N952-5.5TPC (int)
TS-N952-5.5PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N952-5.5D (ext) P-N952-5.5D (int)


- Specify manufacturer and function of lock to be used.
- 2.375" or 2.750" backset standard.
- 1.375" minimum door thickness.
- 4.500" center-to-center spacing.
- Door handing and thickness is required for all lever/knob deadbolt entry sets.
- Always specify lever/knob design.
- All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



N952R5.5 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

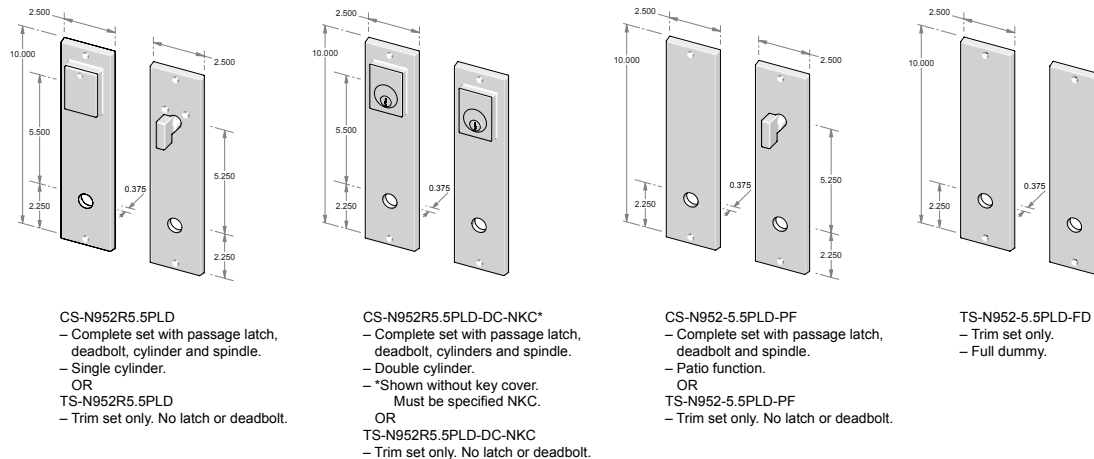

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N952R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952R-KC (ext) EP-N952TPC (int)*
CS-N952R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952R-NKC (ext) EP-N952R-NKC (int)*
CS-N952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N952 (ext) EP-N952TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N952R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952R-KC (ext) EP-N952TPC (int)
TS-N952R-PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N952R-NKC (ext) EP-N952R-NKC (int)
TS-N952PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N952 (ext) EP-N952TPC (int)
TS-N952PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N952D (ext) P-N952D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




N953 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-N953PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-N953PLD
 – Trim set only. No latch or deadbolt.

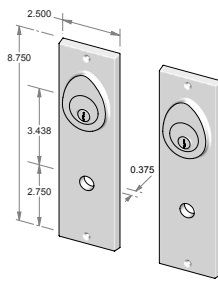

CS-N953PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-N953PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

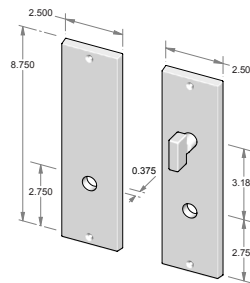

CS-N953PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-N953PLD-PF
 – Trim set only. No latch or deadbolt.



TS-N953PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N953PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N953KC (ext) EP-N953TPC (int)*
CS-N953PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N953NKC (ext) EP-N953NKC (int)*
CS-N953PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N953 (ext) EP-N953TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

All functions available without key cover. Add NKC to part number.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N953PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N953KC (ext) EP-N953TPC (int)
TS-N953PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N953NKC (ext) EP-N953NKC (int)
TS-N953PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N953 (ext) EP-N953TPC (int)
TS-N953PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N953D (ext) P-N953D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


All functions available without key cover. Add NKC to part number.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



N955 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

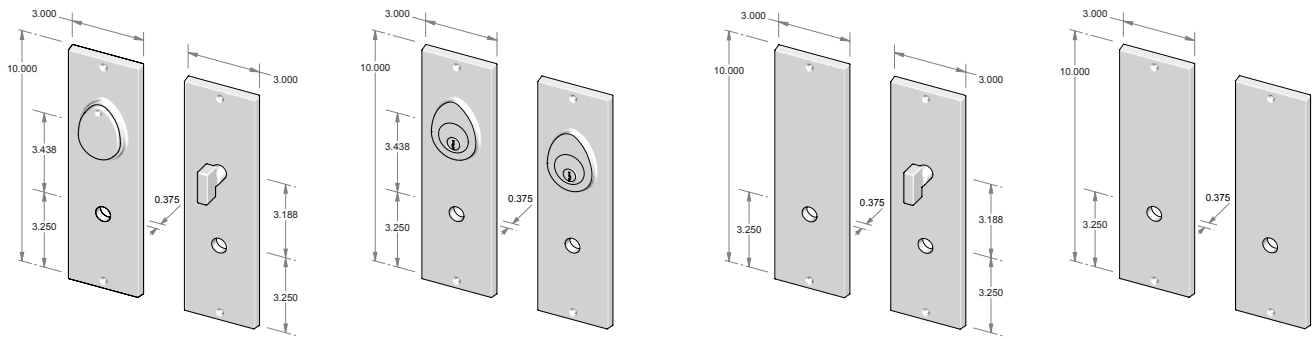

CS-N955PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-N955PLD
 – Trim set only. No latch or deadbolt.

CS-N955PLD-DC-NKC*
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 – *Shown without key cover. Must be specified NKC.
 OR
TS-N955PLD-DC-NKC
 – Trim set only. No latch or deadbolt.

CS-N955PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-N955PLD-PF
 – Trim set only. No latch or deadbolt.

TS-N955PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N955PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N955KC (ext) EP-N955TPC (int)*
CS-N955PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N955NKC (ext) EP-N955NKC (int)*
CS-N955PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N955 (ext) EP-N955TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N955PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N955KC (ext) EP-N955TPC (int)
TS-N955PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N955NKC (ext) EP-N955NKC (int)
TS-N955PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N955 (ext) EP-N955TPC (int)
TS-N955PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N955D (ext) P-N955D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.


PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

SUN VALLEY BRONZE



N957 NOVUS LEVER/KNOB DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

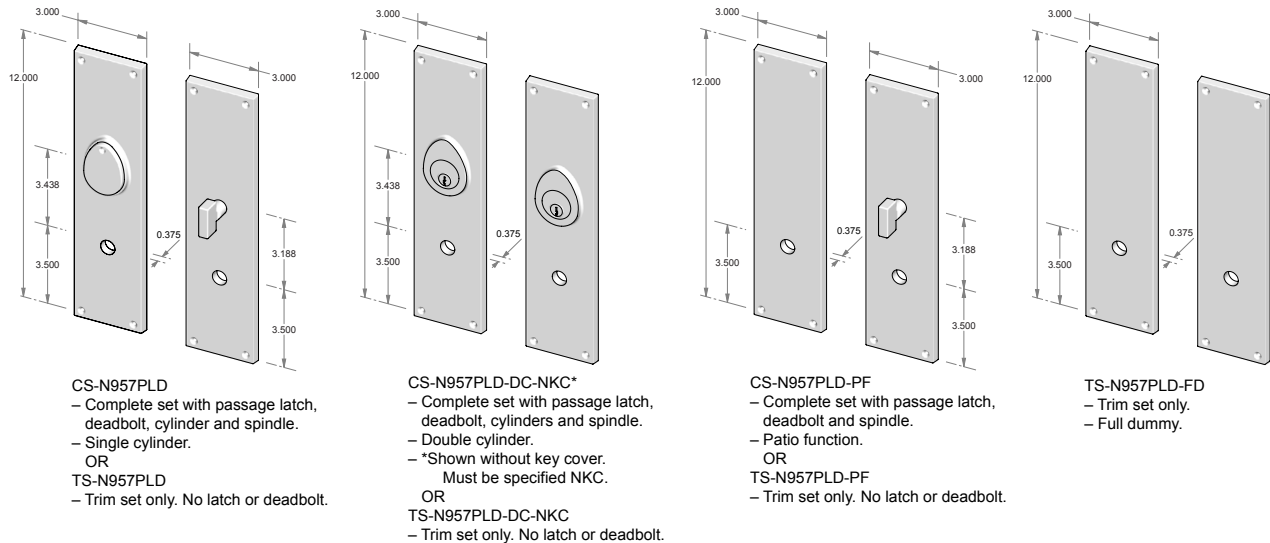

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-N957PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N957KC (ext) EP-N957TPC (int)*
CS-N957PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N957NKC (ext) EP-N957NKC (int)*
CS-N957PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N957 (ext) EP-N957TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-N957PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N957KC (ext) EP-N957TPC (int)
TS-N957PLD-DC	Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-N957NKC (ext) EP-N957NKC (int)
TS-N957PLD-PF	Patio function. Lever/knob x lever/knob deadbolt entry set. P-N957 (ext) EP-N957TPC (int)
TS-N957PLD-FD	Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-N957D (ext) P-N957D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.




2510 TETON LEVER/KNOB DEADBOLT ENTRY SETS


Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.




CS-2510PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
TS-2510PLD
 – Trim set only. No latch or deadbolt.

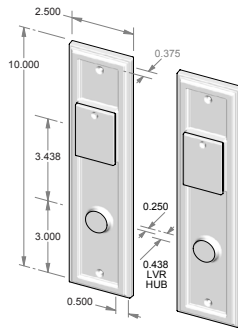

CS-2510PLD-DC
 – Complete set with passage latch, deadbolt, cylinders and spindle.
 – Double cylinder.
 OR
TS-2510PLD-DC
 – Trim set only. No latch or deadbolt.

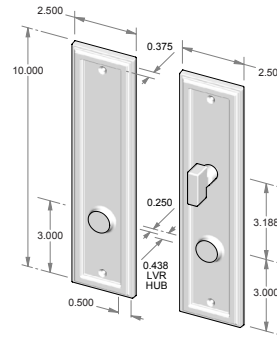

CS-2510PLD-PF
 – Complete set with passage latch, deadbolt and spindle.
 – Patio function.
 OR
TS-2510PLD-PF
 – Trim set only. No latch or deadbolt.



TS-2510PLD-FD
 – Trim set only.
 – Full dummy.

Complete sets with tubular passage latch, deadbolt, cylinder(s) and spindle.

CS-2510PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2510KC (ext) EP-2510TPC (int)*

CS-2510PLD-DC

Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2510KC (ext) EP-2510KC (int)*

CS-2510PLD-PF

Patio function. Lever/knob x lever/knob deadbolt entry set. P-2510 (ext) EP-2510TPC (int)

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt 2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-2510PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2510KC (ext) EP-2510TPC (int)

TS-2510PLD-DC

Double cylinder. Lever/knob x lever/knob deadbolt entry set. EP-2510KC (ext) EP-2510KC (int)

TS-2510PLD-PF

Patio function. Lever/knob x lever/knob deadbolt entry set. P-2510 (ext) EP-2510TPC (int)

TS-2510PLD-FD

Full dummy. Lever/knob x lever/knob deadbolt dummy set. P-2510D (ext) P-2510D (int)

Specify manufacturer and function of lock to be used.

2.375" or 2.750" backset standard.

1.375" minimum door thickness.

3.438" center-to-center spacing.

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB408 BEVEL EDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.



- CS-LB408PLD
– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-LB408PLD
– Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB408KC (ext) EP-408TPC (int)*
-------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB408PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB408PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB408KC (ext) EP-408TPC (int)
-------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB408PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB410 BEVEL EDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

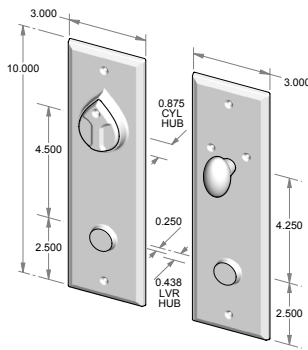

- CS-LB410PLD
– Complete set with passage latch, deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-LB410PLD
– Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB410KC (ext) EP-410TPC (int)*
-------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB410PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB410PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB410KC (ext) EP-410TPC (int)
-------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB410PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB601 BEVEL EDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

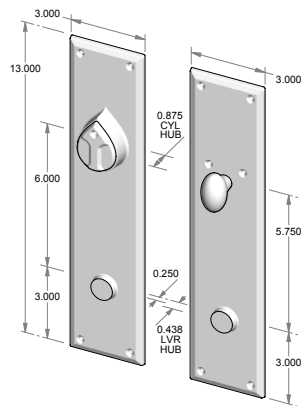

CS-LB601PLD
 – Complete set with passage latch,
 deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB601PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB601PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB601KC (ext) EP-601TPC (int)*
-------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

6.000" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB601PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB601PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB601KC (ext) EP-601TPC (int)
-------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

6.000" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB601PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB601-5.5 BEVEL EDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

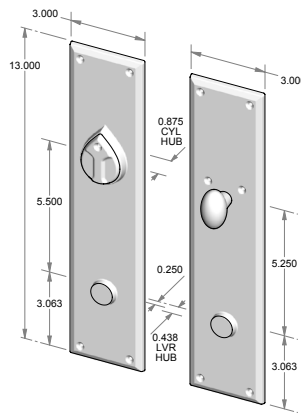

CS-LB601-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB601-5.5PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB601-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB601-5.5KC (ext) EP-601-5.5TPC (int)*

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB601-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB601-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB601-5.5KC (ext) EP-601-5.5TPC (int)

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB601-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB602-5.5 BEVEL EDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

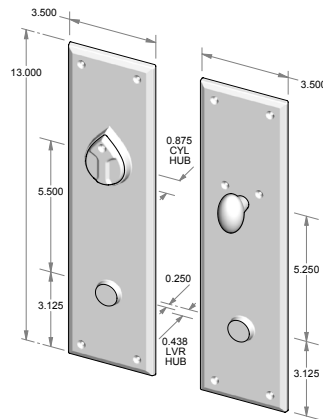

CS-LB602-5.5PLD
– Complete set with passage latch,
deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-LB602-5.5PLD
– Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB602-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB602-5.5KC (ext)
EP-602-5.5TPC (int)*

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB602-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB602-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB602-5.5KC (ext)
EP-602-5.5TPC (int)

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB602-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB-A409 ARCH LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

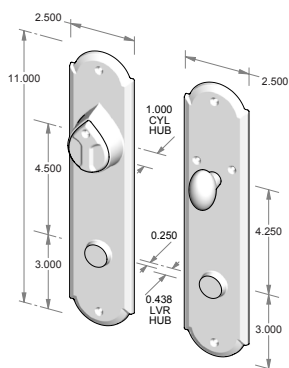

- CS-LB-A409PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB-A409PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB-A409PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A409KC (ext) EP-A409TPC (int)*
---------------	--

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A409PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB-A409PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A409KC (ext) EP-A409TPC (int)
---------------	---

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A409PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB-A409-5.5 ARCH LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

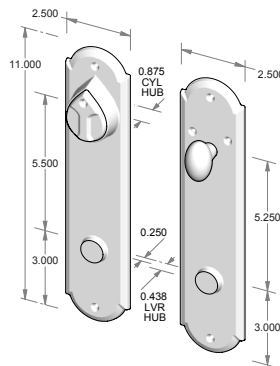

CS-LB-A409-5.5PLD
– Complete set with passage latch,
deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-LB-A409-5.5PLD
– Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB-A409-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A409-5.5KC
(ext) EP-A409-5.5TPC (int)*

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A409-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB-A409-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A409-5.5KC
(ext) EP-A409-5.5TPC (int)

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A409-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB-A601-5.5 ARCH LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

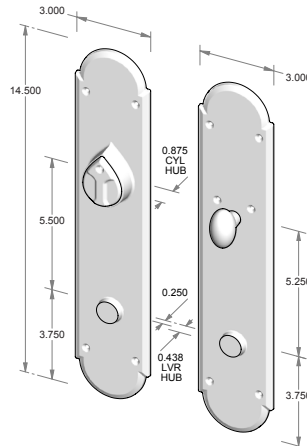

CS-LB-A601-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB-A601-5.5PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB-A601-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A601-5.5KC (ext) EP-A601-5.5TPC (int)*
-------------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A601-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB-A601-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A601-5.5KC (ext) EP-A601-5.5TPC (int)
-------------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A601-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB-A602 ARCH LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

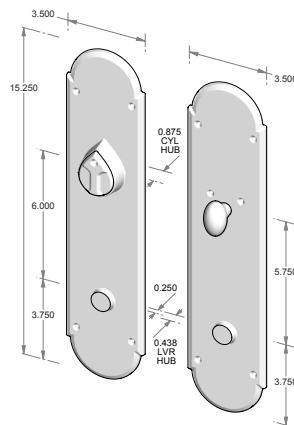

CS-LB-A602PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB-A602PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB-A602PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A602KC (ext)
 EP-A602TPC (int)*

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

6.000" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A602PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB-A602PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A602KC (ext)
 EP-A602TPC (int)

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

6.000" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A602PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB-A602-5.5 ARCH LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

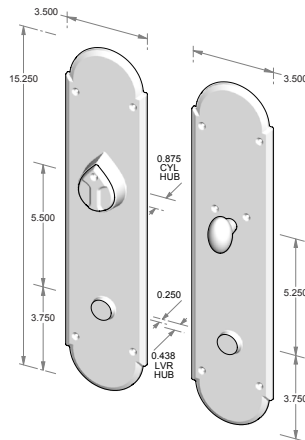

CS-LB-A602-5.5PLD
– Complete set with passage latch,
deadbolt, cylinder and spindle.
– Single cylinder.
OR
TS-LB-A602-5.5PLD
– Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB-A602-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A602-5.5KC (ext) EP-A602-5.5TPC (int)*

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A602-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB-A602-5.5PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB-A602-5.5KC (ext) EP-A602-5.5TPC (int)

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB-A602-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB952 CONTEMPORARY LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.



CS-LB952PLD
 – Complete set with passage latch,
 deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB952PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB952PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB952KC (ext) EP-952TPC (int)*
-------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB952PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB952PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB952KC (ext) EP-952TPC (int)
-------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB952PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB953R CONTEMPORARY LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.



CS-LB953R-PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB953R-PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB953R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB953R-KC (ext) EP-953TPC (int)*
---------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB953R-PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB953R-PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB953R-KC (ext) EP-953TPC (int)
---------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB953R-PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB1245 FLEUR DE LIS LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

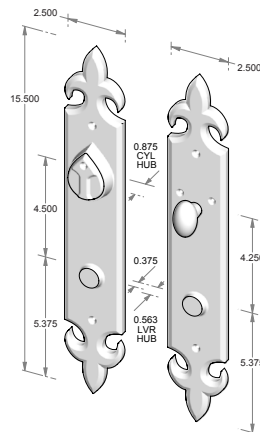

CS-LB1245PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB1245PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB1245PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB1245KC (ext) EP-1245TPC (int)*
--------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB1245PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB1245PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB1245KC (ext) EP-1245TPC (int)
--------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

4.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB1245PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB1245-5.5 FLEUR DE LIS LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

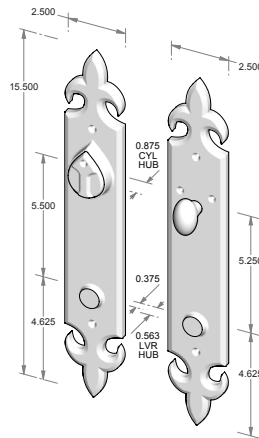

CS-LB1245-5.5PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB1245-5.5PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB1245-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB1245-5.5KC (ext) EP-1245-5.5TPC (int)*
------------------	--

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB1245-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB1245-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB1245-5.5KC (ext) EP-1245-5.5TPC (int)
------------------	---

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB1245-5.5PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB421 RIDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.



- CS-LB421PLD
 – Complete set with passage latch, deadbolt cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
 TS-LB421PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB421PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB421KC (ext)
 EP-421TPC (int)*

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB421PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB421PLD

Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB421KC (ext)
 EP-421TPC (int)

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB421PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB422-5.5 RIDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

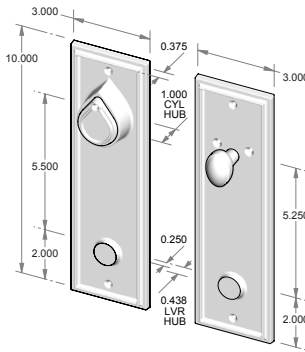

- CS-LB422-5.5PLD
– Complete set with passage latch, deadbolt cylinder and spindle.
– Single cylinder.
– Shown with KC-300 and TPC-306.
OR
TS-LB422-5.5PLD
– Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB422-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB422-5.5KC (ext) EP-422-5.5TPC (int)*
-----------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB422-5.5 PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB422-5.5PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB422-5.5KC (ext) EP-422-5.5TPC (int)
-----------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

5.500" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB422-5.5 PLD exterior cylinder hub 1.000" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB423 RIDGE LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.

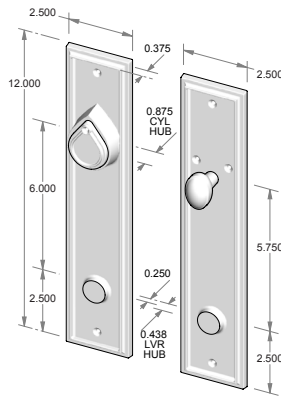

- CS-LB423PLD
 – Complete set with passage latch, deadbolt cylinder and spindle.
 – Single cylinder.
 – Shown with KC-300 and TPC-306.
 OR
 TS-LB423PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB423PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB423KC (ext) EP-423TPC (int)*
-------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

6.000" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB423PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB423PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB423KC (ext) EP-423TPC (int)
-------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

6.000" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB423PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.


Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.



LB1510 BANDBOX LEVER/KNOB BLUETOOTH SMART DEADBOLT ENTRY SETS

Illustrations are for demonstration purposes only. Any knob, lever or ring pull can be combined with any style or size escutcheon plate.



- CS-LB1510PLD
 – Complete set with passage latch, deadbolt, cylinder and spindle.
 – Single cylinder.
 OR
 TS-LB1510PLD
 – Trim set only. No latch or deadbolt.

Sun Valley Bronze LB Series deadbolt trim is compatible with the Level Bolt® smart lock deadbolt. Level Bolt® is purchased by the showroom or the customer. Sun Valley Bronze provides trim only or trim with Baldwin latch and deadbolt cylinder.

Complete sets with tubular passage latch, deadbolt cylinder and spindle. Bluetooth smart deadbolt latch provided by other.

CS-LB1510PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB1510KC (ext) EP-1510TPC (int)*
--------------	---

Baldwin 5500 Series tubular latch/Baldwin 8208 Series deadbolt cylinder 2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB1510PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

*Upcharge for doors over 2.250" thick. Refer to PARTS, Strikes.

Trim sets for tubular passage latch, deadbolt, spindle; no latch, deadbolt or cylinder(s) included.

TS-LB1510PLD	Single cylinder. Lever/knob x lever/knob deadbolt entry set. EP-LB1510KC (ext) EP-1510TPC (int)
--------------	--

Specify manufacturer of lock to be used.

2.375" or 2.750" backset standard.

1.750" minimum door thickness. Requires 2.125" deadbolt face bore.

3.438" center-to-center spacing. Deadbolt cylinder fasteners visible on interior escutcheon.

LB1510PLD exterior cylinder hub 0.875" projection (includes plate thickness).

Door handing and thickness is required for all lever/knob deadbolt entry sets.

Always specify lever/knob design.

PROPRIETARY AND CONFIDENTIAL: The information contained in this drawing is the sole property of Sun Valley Bronze. Any reproduction in part or as a whole without the written permission of Sun Valley Bronze is prohibited.

