

COUNTER

SETUP INSTRUCTIONS



THANK YOU FOR YOUR PURCHASE!

If you have questions about installation, maintenance, or take down, please call us at (800)426-9496. Our goal is that you are completely satisfied with our products. Please read this installation manual carefully and follow all instructions contained herein. Please note that the installer is responsible for the site selection, installation and use. Do not erect during inclement weather and follow all safety procedures during the installation and take down process.

Please contact all utility companies for underground services. In many states, the utilities work together and have formed a Utility Locating Service. It is your responsibility to locate all the underground services, including speaking to the owner about irrigation, pool and other special services that they may have installed. Also, please note that special precautions should be taken such that any overhead powerlines are duly noted and avoided during the tent erection process.




TentCraft Inc in no way represents the estimated holding power to be true in all cases. It is an estimate, and as such, does not imply that the figures are sufficient to hold any tent securely in windy or adverse weather conditions. The tent installer accepts sole responsibility for the safe installation, teardown, and maintenance of any tent. TentCraft does not represent in any way that the materials provided with the purchase of the tent are sufficient enough to hold it up in windy or adverse weather conditions. There is no way for TentCraft to know the site conditions or the weather conditions at the event. This leaves us unable to recommend the adequate amount of holding power needed to hold the tent safely in position. Furthermore, we are not responsible for the methods which the installer uses to erect the tent or anchor it in position. Installers **MUST be empowered to deem the tent unsafe for occupancy if/when the weather becomes unstable.**

Step 1



Remove the counter kit from the carrying bag. The kit contains two sections of wooden counter, one with two metal legs slid into the bottom and one with a single metal leg slid into the bottom. These sections will be joined to create a single counter.

Step 2

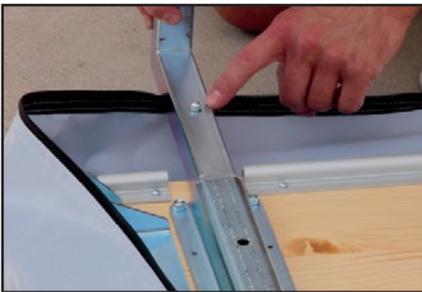

Prepare the counters for installation by removing the first metal leg from bracket on the underside of the counter. Flip the leg up so the shorter end with the push button is parallel to the counter. Press the push button in and slide the leg into the metal bracket until it snaps into place.

Step 3



Remove the second metal leg from the underside of the same counter and insert it into the remaining open bracket.

Step 4



Locate the second section of counter and perform step two for the single metal leg on this counter.

Step 5



Begin with the counter with two legs. To attach the counter to the tent leg, twist off the black knob on the outside of the clamp and remove the L clamp. Place the L clamp attached to the counters on the tent leg directly below the push button.

Step 6



Replace the L clamp that was removed back onto the bolt so that the clamp is enclosed around the leg. Replace the black knob onto the bolt and tighten it to hold the counter onto the tent leg.

Step 7



Next, attach the counter with one leg. This counter is connected to the other by pushing the lever underneath the counter and sliding down over top of the metal bracket. Then attach the second half of the counter to the opposite tent leg by repeating steps 5 and 6.

Step 8



If the setup includes a half wall, the keder track that accepts the wall can be found on the bottom, front edge of the counter.