

### Features

- Fixture-mount design.
- Intended for urinal installations with 3/4" spud coupling connection.
- Includes a 30-year hybrid energy cell.
- Retrofit models require a control stop and vacuum breaker.

### Material

- Brass construction.

### Technology

- Electronic infrared sensor with WAVE technology for accurate activation.
- Slow-closing piston technology.

### Deep Rough-In and Extension Kits

1118986

K-13716-CP

K-10313-CP



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1  
CSA B125.3  
CSA B64  
ASSE 1037  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

| Color                                                                                | Code | Description     |
|--------------------------------------------------------------------------------------|------|-----------------|
|  | CP   | Polished Chrome |

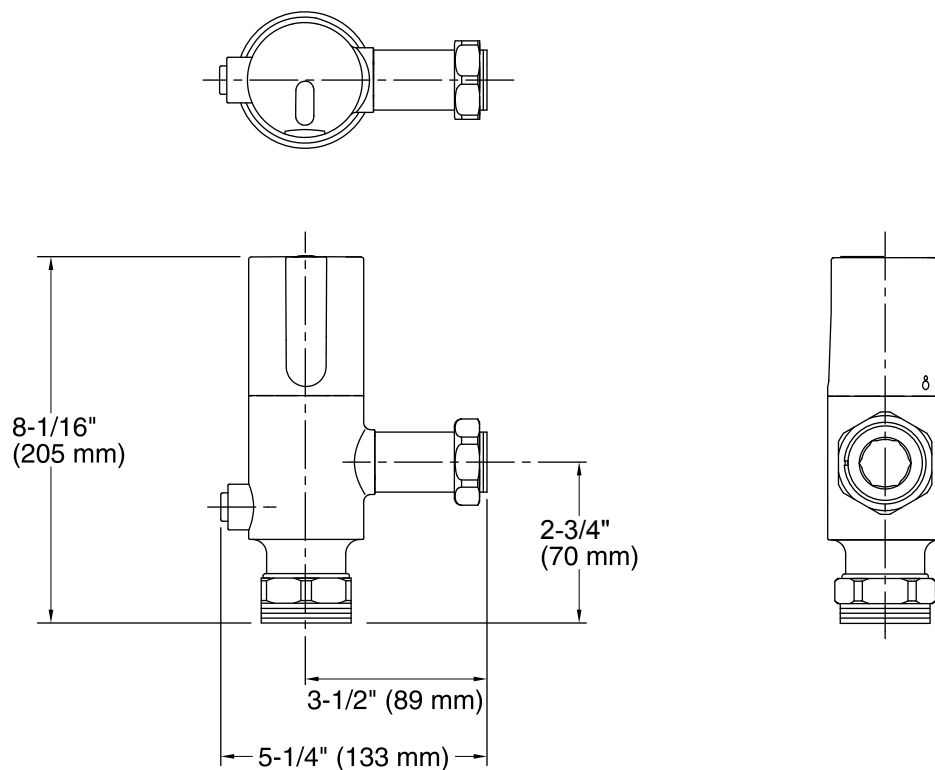

### Technical Information

All product dimensions are nominal.

### Pressure and Supply Requirements

Fixture pressure max 80 psi (551.6 kPa)  
(static):

### Notes

Install this product according to the installation guide.

Pressure over 80 psi (552 kPa) is not recommended on most plumbing fixtures.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.