

# HEATING SYSTEMS

TOWEL BAR WARMERS, BASEBOARD RADIATORS,  
FLAT TUBE RADIATORS & PANEL RADIATORS

## DISTINCTIVE DESIGNER SERIES

- Space saving design
- Quiet, comfortable heating
- Efficient heat transfer
- Variety of heights & lengths




# TOWEL BAR WARMERS



## TECHNICAL INFORMATION

Order no.	Style	Length	Height	BTU Output*	Finish Color	Weight
		In	In			lbs
PTW24.30SW	Straight	24	30	1584	White	14
PTW24.48SW	Straight	24	48	2464	White	21
PTW24.60SW	Straight	24	60	3081	White	26
PTW24.72SW	Straight	24	72	3731	White	31
PTW24.30CW	Curved	24	30	1621	White	14
PTW24.48CW	Curved	24	48	2513	White	21
PTW24.60CW	Curved	24	60	3126	White	26
PTW24.72CW	Curved	24	72	3775	White	31
PTW24.48CC	Curved	24	48	1714	Chrome	21
PTW24.60CC	Curved	24	60	2139	Chrome	26
PTW24.72CC	Curved	24	72	2556	Chrome	31

## DIMENSIONAL INFORMATION

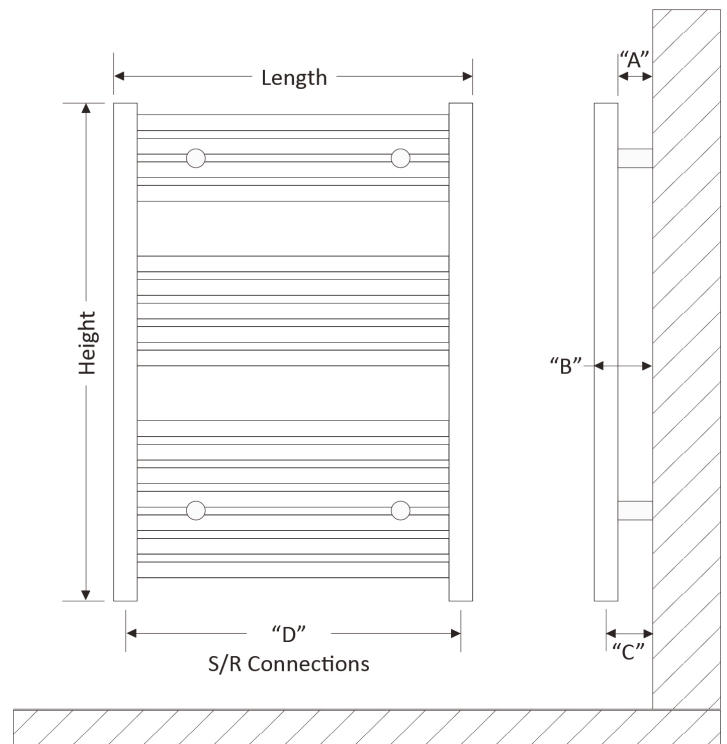

Towel Bar Warmer	Length	A	B	C	D
	In	In	In	In	In
Straight	23 1/4	2 1/8	3 3/8	2 o.c.	21 7/8 o.c.
Curved	23 1/4	1 3/4	4	2 o.c.	21 13/16 o.c.

Conforto Towel Warmers provide just the right combination of stylish European design and efficient functionality at an economical price.

The Conforto Towel Warmer can be used anywhere in the home but is perfectly sized for providing additional heat in bathrooms. Available in both straight and curved designs with white and chrome finish options, with a variety of heights and BTU outputs the Conforto Towel Warmers will accommodate almost every space.

All Conforto Towel Warmers feature bottom pipe connections and include the mounting hardware. Multiple valve and pipe adapter options to accommodate all piping scenarios are available separately.

When using the optional TRV valves Individual temperature control is possible, for added comfort and efficiency.

All Conforto Towel Bar Warmers have a 5-Year Warranty



# BASEBOARD RADIATORS



**Primary Heating System:** Conforto Baseboard radiators are a perfect solution for your primary heating system, providing consistent and efficient warmth throughout your home. We provide you with high quality materials ensuring longevity and reliability of your purchased product. We offer a range of sizes and configurations, allowing you to choose the most suitable option for your specific heating needs.

**Complement to Radiant Floor Heating:** Add supplemental heat to your radiant floor heating system with Conforto Radiators, ensuring uniform warmth from top to bottom.

**Integration with Traditional Heating:** use Conforto baseboard radiators in conjunction with traditional heating sources for a comprehensive and adaptable heating strategy, maximizing the efficiency of both high and low temperature heating systems.

Conforto baseboards combine the comfort of radiant heat with an elegant design, creating a harmonious blend of style and warmth.

## TECHNICAL INFORMATION

Order no.	Tubes	Height	Length	Depth	BTU Output (Avg Water Temp)			Weight lbs
		In	In	In	180°F	140°F	120°F	
H11-02-1112-24	2	6	24	2	1112	776	389	10
H11-02-1668-36		6	36	2	1668	1164	584	15
H11-02-2224-48		6	48	2	2224	1552	779	19
H11-02-2780-60		6	60	2	2780	1940	973	22
H11-02-3336-72		6	72	2	3336	2328	1168	27
H11-02-3892-84		6	84	2	3892	2716	1363	30
H11-02-4448-96		6	96	2	4448	3104	1557	33
H11-03-1429-24	3	9	24	2	1429	997	500	14
H11-03-2144-36		9	36	2	2144	1496	750	19
H11-03-2859-48		9	48	2	2859	1995	1000	25
H11-03-3573-60		9	60	2	3573	2493	1250	30
H11-03-4288-72		9	72	2	4288	2992	1500	36
H11-03-5003-84		9	84	2	5003	3491	1750	42
H11-03-5717-96		9	96	2	5717	3989	2000	48

- Elegant alternative to traditional finned-tube baseboard
- Durable powder coated finish
- Simple installation
- Flexible mounting system
- Available in 6" or 9" heights with lengths up to 96"
- Installation in closed-loop hot water systems only



# SINGLE PANEL RADIATORS

## TECHNICAL INFORMATION

Order no.	Height	Length	Depth	Baseboard Equivalent**	BTU Output (AVG Water Temp)			Weight
	In	In	In		Feet	180°F	140°F	
DD20.16SNG	20	16	2 5/8	3.7	2171	1198	580	22
DD20.20SNG	20	20	2 5/8	4.7	2714	1497	725	28
DD20.24SNG	20	24	2 5/8	5.6	3256	1797	870	33
DD20.28SNG	20	28	2 5/8	6.5	3799	2096	1015	38
DD20.32SNG	20	32	2 5/8	7.5	4342	2396	1160	44
DD20.36SNG	20	36	2 5/8	8.4	4884	2695	1305	49
DD20.40SNG	20	40	2 5/8	9.4	5427	2994	1450	54
DD20.48SNG	20	48	2 5/8	11.2	6512	3593	1740	65
DD20.56SNG	20	56	2 5/8	13.1	7598	4192	2030	75
DD20.64SNG	20	64	2 5/8	15	8683	4791	2320	86
DD20.72SNG	20	72	2 5/8	16.8	9769	5390	2610	97
DD24.16SNG	24	16	2 5/8	4.3	2497	1373	662	26
DD24.20SNG	24	20	2 5/8	5.4	3122	1717	828	32
DD24.24SNG	24	24	2 5/8	6.5	3746	2060	993	38
DD24.28SNG	24	28	2 5/8	7.5	4370	2403	1159	44
DD24.32SNG	24	32	2 5/8	8.6	4995	2747	1324	50
DD24.36SNG	24	36	2 5/8	9.7	5619	3090	1490	57
DD24.40SNG	24	40	2 5/8	10.8	6243	3433	1656	63
DD24.44SNG	24	44	2 5/8	11.8	6868	3777	1821	69
DD24.48SNG	24	48	2 5/8	12.9	7492	4120	1987	75
DD24.56SNG	24	56	2 5/8	15.1	8741	4807	2318	87
DD24.64SNG	24	64	2 5/8	17.2	9989	5494	2649	100
DD24.72SNG	24	72	2 5/8	19.4	11238	6180	2980	112




Four different radiator valves are available to make system design, installation and maintenance quick and easy



Conforto Snap-Grip mounting brackets make radiator installation and removal a snap



## RADIATOR ROUGH-IN DIMENSION

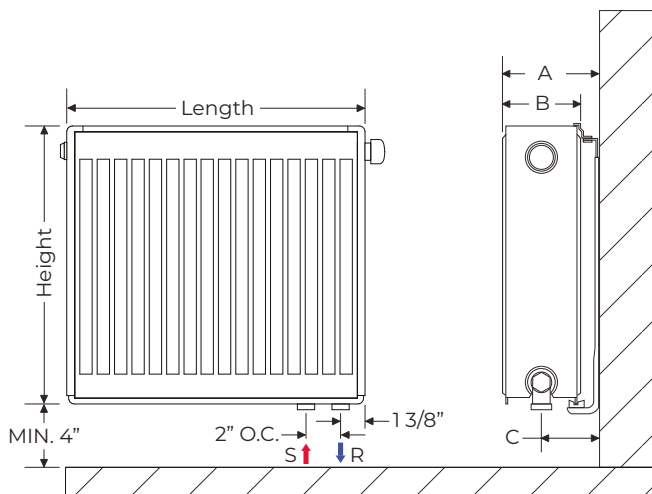

Radiator Model	Height	A	B	C
	In	In	In	In
Single	20   24	3 3/4	2 5/8	2 1/2 o.c.
Double	12   16   20   24   36	5 1/4	4 1/8	3 1/4 o.c.

- Installation in closed-loop hot water systems only
- Max operating temperature - 250°F
- Max operating pressure - 145 psi
- Not for use in steam systems
- Radiator can be turned 180° to allow for either left or right hand pipe connections

# DOUBLE PANEL RADIATORS

## TECHNICAL INFORMATION

Order no.	Height	Length	Baseboard Equivalent**	BTU Output (AVG Water Temp)			Weight lbs
	In	In		180°F	140°F	110°F	
DD12.16DBL	12	16	3.3	1934	1068	519	17
DD12.24DBL	12	24	5.0	2900	1600	781	24
DD12.32DBL	12	32	6.7	3866	2133	1041	31
DD12.40DBL	12	40	8.3	4831	2661	1300	39
DD12.48DBL	12	48	10.0	5800	3200	1559	46
DD12.56DBL	12	56	11.7	6766	3733	1819	53
DD12.64DBL	12	64	13.3	7732	4265	2081	60
DD16.16DBL	16	16	4.2	2418	1331	648	23
DD16.20DBL	16	20	5.2	3022	1665	812	28
DD16.24DBL	16	24	6.3	3626	1999	972	33
DD16.28DBL	16	28	7.3	4231	2330	1136	38
DD16.32DBL	16	32	8.3	4835	2665	1297	43
DD16.36DBL	16	36	9.4	5440	2996	1460	48
DD16.40DBL	16	40	10.4	6044	3330	1621	52
DD16.44DBL	16	44	11.5	6648	3665	1784	57
DD16.48DBL	16	48	12.5	7253	3995	1945	63
DD16.56DBL	16	56	14.5	8417	4668	2274	75
DD16.64DBL	16	64	16.6	9620	5334	2599	85
DD16.72DBL	16	72	18.7	10822	6000	2923	96
DD20.16DBL	20	16	5.0	2876	1583	771	28
DD20.20DBL	20	20	6.2	3593	1979	962	34
DD20.24DBL	20	24	7.4	4313	2375	1153	40
DD20.28DBL	20	28	8.7	5033	2771	1347	46
DD20.32DBL	20	32	9.9	5749	3166	1539	53
DD20.36DBL	20	36	11.2	6469	3562	1733	58
DD20.40DBL	20	40	12.4	7186	3958	1924	64
DD20.44DBL	20	44	13.6	7906	4354	2115	71
DD20.48DBL	20	48	14.9	8626	4746	2310	76
DD20.56DBL	20	56	17.3	10013	5546	2698	91
DD20.64DBL	20	64	19.7	11440	6335	3080	105
DD20.72DBL	20	72	22.2	12871	7127	3466	116
DD24.16DBL	24	16	5.7	3310	1819	884	31
DD24.20DBL	24	20	7.1	4135	2276	1105	40
DD24.24DBL	24	24	8.6	4964	2730	1327	48
DD24.28DBL	24	28	10.0	5790	3183	1546	56
DD24.32DBL	24	32	11.4	6619	3641	1767	66
DD24.36DBL	24	36	12.8	7445	4094	1989	75
DD24.40DBL	24	40	14.3	8270	4548	2211	81
DD24.44DBL	24	44	15.7	9100	5002	2429	89
DD24.48DBL	24	48	17.1	9926	5459	2651	97
DD24.56DBL	24	56	20.0	11580	6367	3095	114
DD24.64DBL	24	64	22.8	13235	7278	3535	130
DD24.72DBL	24	72	25.7	14890	8190	3978	149
DD36.16DBL	36	16	7.8	4541	2457	1170	48
DD36.20DBL	36	20	9.8	5678	3071	1464	56
DD36.24DBL	36	24	11.7	6814	3685	1757	72
DD36.32DBL	36	32	15.7	9083	4913	2341	88

Conforto Panel Radiators combine the comfort of radiant heat with an elegant contemporary design. These attractive radiators have been providing unsurpassed comfort and efficiency in European homes for more than 40 years. Because they are extremely versatile they can be used as a primary heating system, a supplement to a radiant floor system, or in conjunction with traditional heating sources.

Virtually silent in operation, Conforto Panel Radiators eliminate the noises associated with other types of heating systems. Unlike conventional baseboard which provides only convective heat, panel radiators emit both radiant and convective heat to produce a blanket of unequaled warmth.

Wall mounted and uniquely designed, Conforto Panel Radiators are durable, easy to clean and reduce the areas where household dirt and dust might collect. Requiring just one quarter the amount of wall space when compared to conventional baseboard, more flexibility is allowed in room design and furniture placement.

\*\* Baseboard equivalent is calculated using an average water temp of 180°F @ 580 BTU per ft. of baseboard.

# HORIZONTAL FLAT TUBE RADIATORS



## TECHNICAL INFORMATION

Order no.	Type 22 horizontal								
	Tubes	Height	Length	Depth	Baseboard Equivalent**	BTU Output (Avg Water Temp)			Weight
		In	In	In		Ft	180°F	140°F	
H22-12X16	4	12	16	3.75	2.9	1696	996	519	17
H22-12X24		12	24	3.75	4.3	2542	1491	778	25
H22-12X32		12	32	3.75	5.8	3388	1989	1041	33
H22-12X40		12	39	3.75	8.9	5207	2156	737	40
H22-17X16	6	17	16	3.75	4.2	2412	1402	723	26
H22-17X24		17	24	3.75	6.2	3620	2105	1052	37
H22-17X32		17	32	3.75	8.3	4825	2805	1447	49
H22-17X40	8	17	39	3.75	10.4	6016	3511	1819	60
H22-23X16		23	16	3.75	5.1	2982	1716	874	34
H22-23X24		23	24	3.75	7.7	4473	2573	1310	50
H22-23X32		23	32	3.75	10.3	5964	3433	1815	65
H22-23X40		23	39	3.75	12.9	7493	4334	2225	80
H22-23X47		23	47	3.75	15.5	8991	5204	2672	96
H22-23X55		23	55	3.75	18	10489	6070	3115	111
H22-23X63		23	63	3.75	20.7	11987	6937	3562	126




# VERTICAL FLAT TUBE RADIATORS

## TECHNICAL INFORMATION

Order no.	Type 20 vertical								
	Tubes	Height	Length	Depth	Baseboard Equivalent**	BTU Output (Avg Water Temp)			Weight
		In	In	In		Ft	180°F	140°F	
V20-48X12	4	47	12	2.25	4.6	2702	1491	723	35
V20-48X17	6	47	17	2.25	7	4050	2238	1085	52
V20-48X24	8	47	23	2.25	9.3	5401	2986	1447	70
V20-63X12	4	63	12	2.25	6	3456	1901	918	46
V20-63X17	6	63	17	2.25	8.9	5186	2853	1375	69
V20-63X24	8	63	23	2.25	11.9	6916	3805	1836	92
V20-63X29	10	63	29	2.25	16.4	9510	5231	2522	115

\*\* Baseboard equivalent is calculated using an average water temp of 180°F @ 580 BTU per ft. of baseboard.

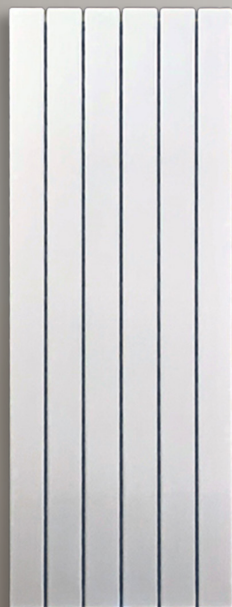

# CONFORTO, A RENOWNED CANADIAN BRAND, PART OF GRANBY INDUSTRIES COMPANY.

## Celebrating 70 Years of Excellence.

Since its inception in 1954, Granby has consistently delivered innovative and high-quality solutions to meet the evolving needs of its customers. With a strong commitment to reliability, performance, and customer satisfaction, Granby Industries has established itself as a trusted name in the industry.

As Granby Industries celebrates its 70th anniversary, it reflects on its rich history while looking forward to a future filled with innovation and growth. The company remains committed to exceeding customer expectations, embracing new technologies, and expanding its product portfolio. With its strong foundation built on trust, integrity, and quality, Granby Industries is poised to continue its legacy of excellence for many more years to come.

#### CONFORTO US OFFICES

67 Target Industrial Cir, Bangor, ME 04401, United States  
Phone: +1 207-942-3636  
ghp-customerservice@granbyindustries.com

[confortohvac.com](http://confortohvac.com)

