



AIR CONDITIONERS

ML14XC1

MERIT® Series

R-410A

PRODUCT SPECIFICATIONS

Bulletin No. 210760
November 2017
Supersedes August 2017



MERIT® SERIES




SEER up to 17.00

1.5 to 5 Tons

Cooling Capacity - 17,800 to 60,000 Btuh

MODEL NUMBER IDENTIFICATION

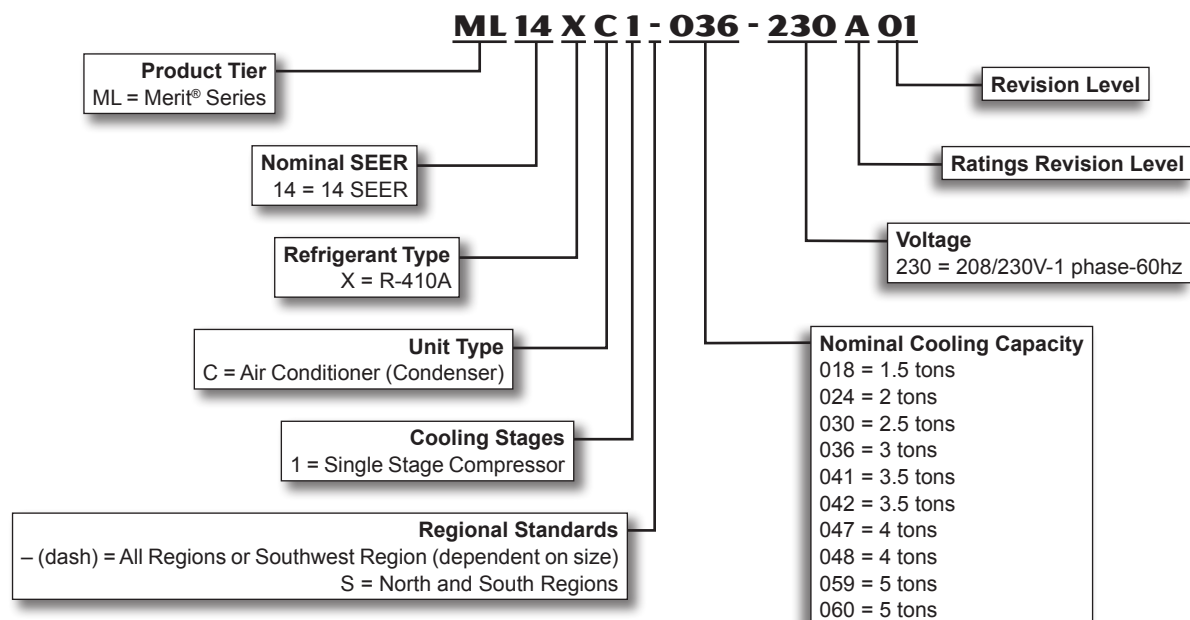

FEATURES

CONTENTS

AHRI System Matches - All Regions	11
AHRI System Matches - North / South Regions	36
AHRI System Matches - Southwest Regions	78
Dimensions - Unit	8
Electrical Data.....	6
Features.....	2
Field Wiring.....	5
Installation Clearances	5
Model Number Identification	1
Optional Accessories	6
Sound Data.....	9
Specifications.....	6

WARRANTY

Compressor - limited warranty for five years in residential installations and five years in non-residential installations.

All other covered components - five years in residential installations and one year in non-residential installations.

Note - Refer to Lennox Equipment Limited Warranty certificate included with unit for specific details.

APPROVALS

AHRI Certified to AHRI Standard 210/240-2008.

Sound rated in Lennox reverberant sound test room in Accordance with test conditions included in AHRI Standard 270-2008.

Tested in the Lennox Research Laboratory environmental test room.

Rated According to U.S. Department of Energy (DOE) test procedures.


Region specific models meet the minimum efficiency requirements for U.S DOE Federal Regional Standards in that area.

Units and components within bonded for grounding to meet safety standards for servicing required by UL, NEC and CEC.

Units are ETL certified for the U.S. and Canada.

ISO 9001 Registered Manufacturing Quality System.

For expanded ratings, see www.LennoxPROs.com.

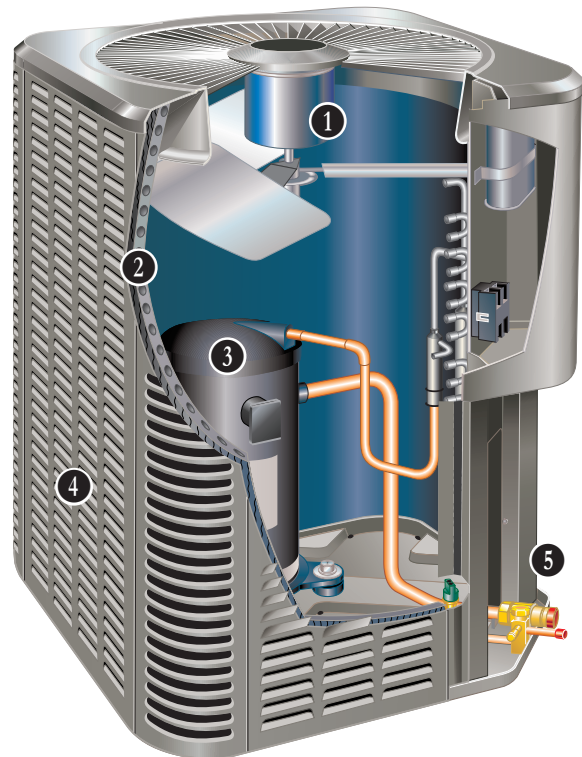

APPLICATIONS

SEER up to 17.00.

1.5 through 5 ton.

Single-phase power supply.

Sound levels as low as 73 dB.

Vertical air discharge allows concealment behind shrubs at grade level or out of sight on a roof.

Matching add-on furnace indoor coils or air handlers provide a wide range of cooling capacities and applications. See AHRI System Matches.

See Indoor Coils and Air Handlers sections for data.

Units shipped completely factory assembled, piped and wired. Each unit test operated at the factory ensuring proper operation.

Installer must set air conditioner, connect refrigerant lines and make electrical connections to complete job.

FEATURES

REFRIGERATION SYSTEM

R-410A Refrigerant

Non-chlorine, ozone friendly, R-410A.

Unit pre-charged with refrigerant.

See Specification table.



1 Outdoor Coil Fan

Direct drive fan moves large air volumes uniformly through entire condenser coil for high refrigerant cooling capacity.

Vertical air discharge minimizes operating sounds and eliminates damage to lawn and shrubs.

Fan motor has sleeve bearings (-018 through -048 and -060 models), ball bearings (-059 model) and is inherently protected.

Motor totally enclosed for maximum protection from weather, dust and corrosion.

Rain shield on motor provides additional protection from moisture.

Louvered steel top fan guard furnished as standard.

Fan service access accomplished by removal of top panel.

High Pressure Switch

Shuts off unit if abnormal operating conditions cause the discharge pressure to rise above setting.

Protects compressor from excessive condensing pressure.

Manual reset.

2 Lennox Quantum™ Coil

Enhanced aluminum alloy tube/enhanced fin coil for superior corrosion resistance.

Lennox designed and fabricated coil.

Ripple-edged aluminum fins.

Aluminum tube construction.

Lanced fins provide maximum exposure of fin surface to air stream resulting in excellent heat transfer.

Fin collars grip tubing for maximum contact area.

Flared shoulder tubing connections/silver soldering construction.

Coil is factory tested under high pressure to ensure leakproof construction.

Steel louvered panels provide complete coil protection.

Panels can be completely removed for servicing.

High Capacity Liquid Line Drier

Furnished with unit for field installation.

Approved for use with R-410A systems.

Traps any moisture or dirt that could contaminate the refrigerant system.

Refrigerant Flow Control

Units applicable to expansion valve systems or RFC systems when matched with specific indoor coils.

RFCIV:


Accurately meters refrigerant in system.

Refrigerant control is accomplished by exact sizing of refrigerant metering orifice.

The principle involves matching indoor coil with proper bore size of orifice in metering device.

Equalizes pressure shortly after compressor stops, unit starts unloaded, eliminating need for additional controls.

Furnished with air conditioner.

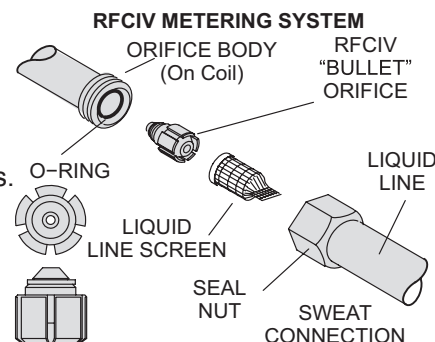

Optional Accessories

Expansion Valve Kits

Must be ordered extra and field installed on certain indoor units. See Refrigerant Metering Devices table.

Chatleff-style fittings.

Freezestat

Installs on or near the vapor line of the indoor coil or on the suction line.

Senses suction line temperature and cycles the compressor off when suction line temperature falls below its setpoint.

Opens at 29°F and closes at 58°F.

Loss of Charge Switch Kit

Helps protect the compressor from damage due low refrigerant charge conditions.

SPST, normally-closed switch, automatic reset switch mounted on suction line.

Refrigerant Line Kits

Refrigerant lines (suction & liquid) are shipped refrigeration clean. Lines are cleaned, dried, pressurized and sealed at factory.

Suction line fully insulated.

Lines are stubbed at both ends.

Not available for -059-060 models. Must be field fabricated.

FEATURES

COMPRESSOR

3 Scroll Compressor

Compressor features high efficiency with uniform suction flow, constant discharge flow, high volumetric efficiency and quiet operation.

Compressor consists of two involute spiral scrolls matched together to generate a series of crescent shaped gas pockets between them.

During compression, one scroll remains stationary while the other scroll orbits around it.

Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates.

As the spiral movement continues, gas pockets are pushed to the center of the scrolls. Volume between the pockets is simultaneously reduced.

When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls.

During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle.

Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency.

Scroll compressor is tolerant to the effects of slugging and contaminants. If this occurs, scrolls separate, allowing liquid or contaminants to be worked toward the center and discharged.

Low gas pulses during compression reduces operational sound levels.

Compressor motor is internally protected from excessive current and temperature.

Compressor is installed in the unit on resilient rubber mounts for vibration free operation.

Compressor Crankcase Heater (-041, -047, -048, -059 & -060 Models)

Protects against refrigerant migration that can occur during low ambient operation.

Optional Accessories

Compressor Crankcase Heater (Optional for 018-024-030-036-042)

Protects against refrigerant migration that can occur during low ambient operation.

Compressor Sound Cover

A reinforced vinyl compressor cover containing a 1-1/2 inch thick batt of fiberglass insulation.

All open edges are sealed with a one-inch wide hook and loop fastening tape.



CONTROLS

Optional Accessories

Compressor Hard Start Kit

Single-phase units are equipped with a PSC compressor motor. This type of motor normally doesn't need a potential relay and start capacitor.

In conditions such as low voltage, this kit may be required to increase the compressor starting torque.

Compressor Low Ambient Cut-Off Switch

Non-adjustable switch (low ambient cut-out) prevents compressor operation when outdoor temperature is below 35°F.

Compressor Time-Off Control

Kit prevents compressor short-cycling and allows time for suction and discharge pressure to equalize.

Permits compressor start-up in an unloaded condition.

Automatic reset with 5 minute delay between compressor shut-off and start-up.

Indoor Blower Off Delay Relay

Delays the indoor blower-off time during the cooling cycle.

See AHRI System Matches for usage.

Low Ambient Kit

Air conditioners operate satisfactorily in the cooling mode down to 45°F outdoor air temperature without any additional controls.

Kit can be added in the field enabling unit to operate properly down to 30°F in the cooling mode.

Crankcase heater and freezestat should be installed on compressors equipped with a Low Ambient Kit.

A compressor lock-out thermostat should be added to terminate compressor operation below recommended operation conditions.

Thermostat

Thermostat not furnished with unit. See Thermostat bulletins in Controls Section and Lennox Price Book.

FEATURES

CABINET

- 4 Heavy gauge steel cabinet with five station metal wash process.
- Louvered heavy gauge steel panels surround unit on all four sides to prevent damage to the coil.
- Powder paint finish provides superior rust and corrosion protection.
- Control box is conveniently located with all controls factory wired.
- Corner patch plate allows access to compressor components.
- Drainage holes are provided in base section for moisture removal.

PermaGuard™ Unit Base

Durable zinc-coated base section resists rust and corrosion.


5 Refrigerant Line Connections, Electrical Inlets, Service Valves

Sweat connection suction and liquid lines are located on corner of unit cabinet.

Fully serviceable brass service valves prevent corrosion and provide access to refrigerant system. Suction valve can be fully shut off, while liquid valve may be front seated to manage refrigerant charge while servicing system.

Refrigerant line connections and field wiring inlets are located in one central area of cabinet for easy access. See dimension drawing.

FIELD WIRING

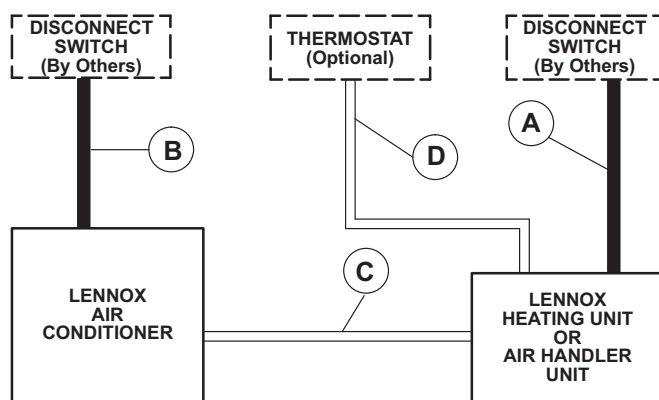

- A - Two Wire Power (not furnished). See Indoor Unit Electrical Data
- B - Two Wire Power (not furnished). See Electrical Data
- C - Four Wire Low Voltage (not furnished). 18 ga. minimum
- D - Five Wire Low Voltage (not furnished). 18 ga. minimum

All wiring must conform to NEC or CEC and local electrical codes.


Optional Accessories

Unit Stand-Off Kit

Black high density polyethylene feet are available to raise unit off of mounting surface away from damaging moisture.

Four feet are furnished per order number.

INSTALLATION CLEARANCES - IN. (MM)

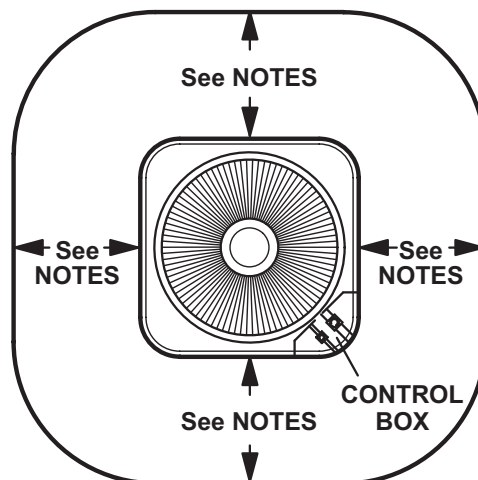

NOTES:

- Service clearance of 30 in. (762 mm) must be maintained on one of the sides adjacent to the control box.
- Clearance to one of the other three sides must be 36 in. (914 mm)
- Clearance to one of the remaining two sides may be 12 in. (305 mm) and the final side may be 6 in. (152 mm).
- A clearance of 24 in. must be maintained between two units.
- 48 in. (1219 mm) clearance required on top of unit.

SPECIFICATIONS

General Data	Model No.	All Regions	---	---	---	---	ML14XC1-041
		North / South Regions	ML14XC1S018	ML14XC1S024	ML14XC1S030	ML14XC1S036	---
		Southwest Region	ML14XC1-018	ML14XC1-024	ML14XC1-030	ML14XC1-036	---
		Nominal Tonnage	1.5	2	2.5	3	3.5
		Indoor Unit Expansion Valve (TXV) (If needed)	12J18	12J18	12J18	12J19	12J20
		RFCIV Metering Orifice Usage	0.052	0.060	0.060	0.071	N/A
Connections (sweat)		Liquid line o.d. - in.	3/8	3/8	3/8	3/8	3/8
		Suction line o.d. - in.	3/4	3/4	3/4	7/8	7/8
¹ Refrigerant (R-410A) furnished			4 lbs. 9 oz.	4 lbs. 9 oz.	5 lbs. 8 oz.	7 lbs. 1 oz.	9 lbs. 0 oz.
Outdoor Coil	Net face area	Outer coil	13.22	16.33	21.00	16.33	21.00
	sq. ft.	Inner coil	---	---	---	15.75	20.25
		Tube diameter - in.	5/16	5/16	5/16	5/16	5/16
		Number of rows	1	1	1	2	2
		Fins per inch	26	26	26	22	22
Outdoor Fan		Diameter - in.	18	22	22	22	22
		Number of blades	3	3	3	3	3
		Motor hp	1/10	1/6	1/6	1/6	1/6
		Cfm	2290	3160	3160	3160	3050
		Rpm	1075	825	825	825	825
		Watts	160	215	215	190	190
	Shipping Data - lbs. 1 package		134	152	169	175	192

ELECTRICAL DATA

	Line voltage data - 60 hz - 1ph	208/230V	208/230V	208/230V	208/230V	208/230V
	² Maximum overcurrent protection (amps)	20	25	25	30	30
	³ Minimum circuit ampacity	11.9	14.6	17	18	19.3
Compressor	Rated load amps	9.0	10.9	12.8	13.6	14.7
	Locked rotor amps	48	59.3	67.8	79	75
	Power factor	0.97	0.97	0.97	0.96	0.96
Condenser Fan Motor	Full load amps	0.7	1	1	1	1
	Locked rotor amps	1.3	1.9	1.9	1.9	1.9

OPTIONAL ACCESSORIES - ORDER SEPARATELY

Compressor Crankcase Heater	93M04	•	•	•	•	
	Factory					•
Compressor Hard Start Kit	Copeland 10J42	•	•	•		
	LG 88M91	•	•	•	•	•
Compressor Low Ambient Cut-Off Switch	45F08	•	•	•	•	•
Compressor Sound Cover	69J03	•	•	•	•	•
Compressor Time-Off Control	47J27	•	•	•	•	•
Freezestat	3/8 in. tubing 93G35	•	•	•	•	•
	5/8 in. tubing 50A93	•	•	•	•	•
Indoor Blower Off Delay Relay	58M81	•	•	•	•	•
Loss of Charge Switch Kit	84M23	•	•	•	•	•
⁴ Low Ambient Kit (Fan Cycling)	34M72	•	•	•	•	•
Refrigerant Line Sets	L15-41-20, L15-41-30, L15-41-40, L15-41-50	•	•	•		
	L15-65-30, L15-65-40, L15-65-50				•	•
Unit Stand-Off Kit	94J45	•	•	•	•	•

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.

¹ Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

² HACR type circuit breaker or fuse.

³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

⁴ Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

SPECIFICATIONS							
General Data	Model No.	All Regions	- - -	ML14XC1-047	ML14XC1-048	ML14XC1-059	ML14XC1-060
		North / South Regions	ML14XC1S042	- - -	- - -	- - -	- - -
		Southwest Region	ML14XC1-042	- - -	- - -	- - -	- - -
		Nominal Tonnage	3.5	4	4	5	5
Indoor Unit Expansion Valve (TXV) (If needed)			12J20	12J20	12J20	12J20	12J20
RFCIV Metering Orifice Usage			0.081	N/A	0.083	N/A	0.096
Connections (sweat)	Liquid line o.d. - in.		3/8	3/8	3/8	3/8	3/8
	Suction line o.d. - in.		7/8	7/8	7/8	1-1/8	1-1/8
1 Refrigerant (R-410A) furnished			8 lbs. 12 oz.	11 lbs. 0 oz.	9 lbs. 12 oz.	11 lbs. 13 oz.	12 lbs. 0 oz.
Outdoor Coil	Net face area	Outer coil	21.00	22.17	21.00	29.09	29.09
	sq. ft.	Inner coil	20.25	21.33	20.25	28.16	28.16
Tube diameter - in.			5/16	5/16	5/16	5/16	5/16
Number of rows			2	2	2	2	2
Fins per inch			22	22	22	22	22
Outdoor Fan	Diameter - in.		22	26	22	26	26
	Number of blades		3	4	4	4	4
	Motor hp		1/6	1/3	1/4	1/3	1/3
	Cfm		3050	4400	3600	4550	4550
	Rpm		825	825	825	820	825
	Watts		190	310	310	215	310
	Shipping Data - lbs. 1 package		211	231	218	253	267
ELECTRICAL DATA							
Line voltage data - 60 hz - 1ph			208/230V	208/230V	208/230V	208/230V	208/230V
2 Maximum overcurrent protection (amps)			40	35	40	45	50
3 Minimum circuit ampacity			23.4	21.9	24.2	28.8	29.6
Compressor	Rated load amps		17.9	16.1	18	20.8	22.2
	Locked rotor amps		112	105.5	117	127.1	127.9
	Power factor		0.96	0.98	0.96	0.98	0.98
Condenser Fan Motor	Full load amps		1	1.8	1.7	2.8	1.8
	Locked rotor amps		1.9	2.9	3.2	- - -	2.9
OPTIONAL ACCESSORIES - ORDER SEPARATELY							
Compressor Crankcase Heater		93M04	•				
		Factory		•	•	•	•
Compressor Hard Start Kit	Copeland	10J42	•		•		
	LG	88M91	•	•	•	•	•
Compressor Low Ambient Cut-Off Switch		45F08	•	•	•	•	•
Compressor Sound Cover		69J03	•	•	•	•	•
Compressor Time-Off Control		47J27	•	•	•	•	•
Freezestat	3/8 in. tubing	93G35	•	•	•	•	•
	5/8 in. tubing	50A93	•	•	•	•	•
Indoor Blower Off Delay Relay		58M81	•	•	•	•	•
Loss of Charge Switch Kit		84M23	•	•	•	•	•
4 Low Ambient Kit (Fan Cycling)		34M72	•	•	•		•
		68M04				•	
Refrigerant Line Sets	L15-65-30, L15-65-40, L15-65-50		•	•	•		
	Field Fabricate					•	•
Unit Stand-Off Kit		94J45	•	•	•	•	•

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.





¹ Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

² HACR type circuit breaker or fuse.

³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

⁴ Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

DIMENSIONS - UNIT - INCHES (MM)

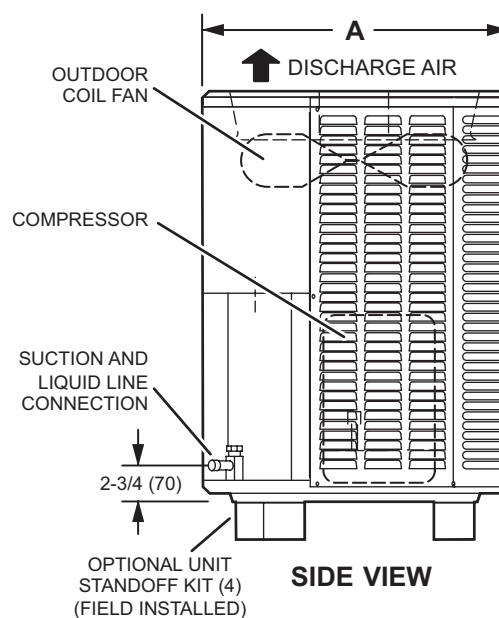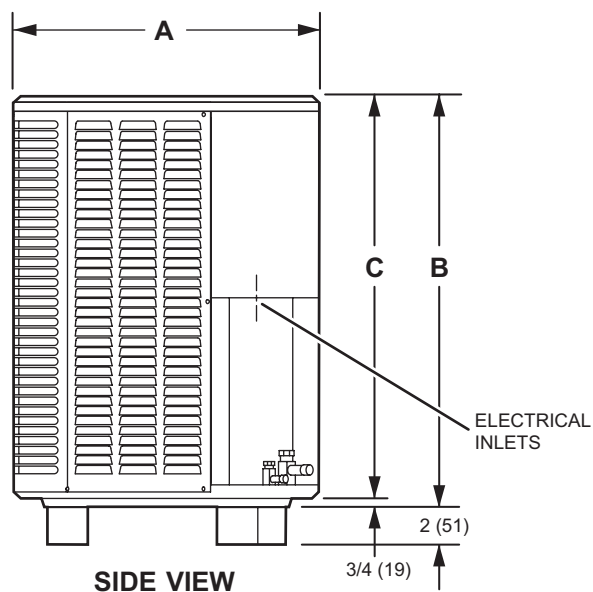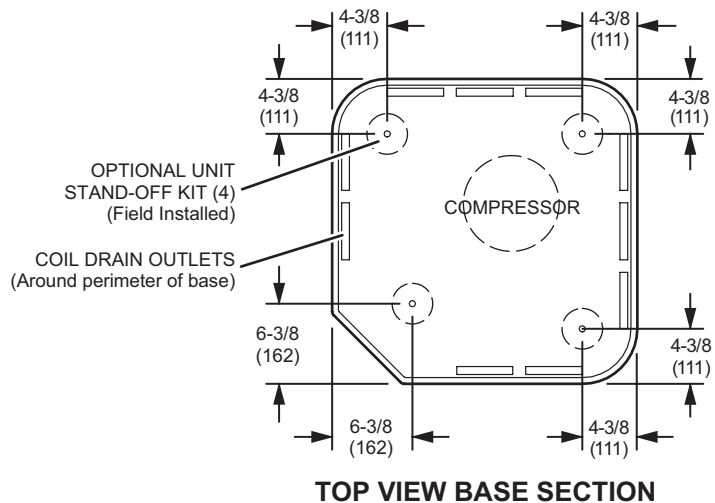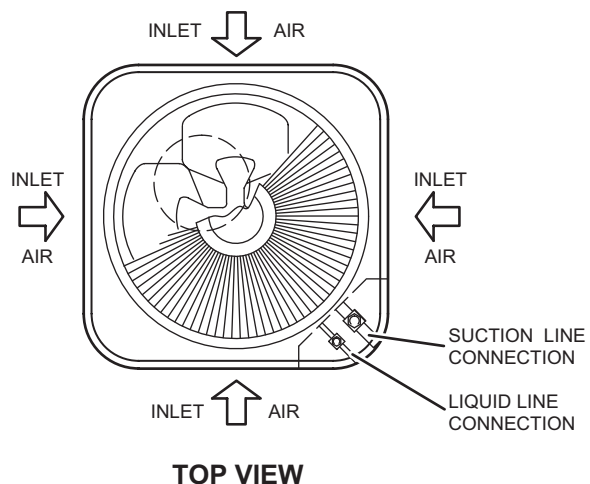

Model	A		B		C	
	inches	mm	inches	mm	inches	mm
018	24-1/4	616	29-1/4	743	28-1/2	724
024	28-1/4	718	29-1/4	743	28-1/2	724
030	28-1/4	718	37-1/4	946	36-1/2	927
036	28-1/4	718	29-1/4	743	28-1/2	724
041	28-1/4	718	37-1/4	946	36-1/2	927
042	28-1/4	718	37-1/4	946	36-1/2	927
047	32-1/4	817	33-1/4	845	32-1/2	826
048	28-1/4	718	37-1/4	946	36-1/2	927
059	32-1/4	817	43-1/4	1099	42-1/2	1080
060	32-1/4	817	43-1/4	1099	42-1/2	1080

SOUND DATA

¹ Unit Model	Octave Band Linear Sound Power Levels dB, re 10 ⁻¹² Watts Center Frequency - HZ							¹ Sound Rating Number (dB)
	125	250	500	1000	2000	4000	8000	
018	53.0	58.5	66.5	69.5	65.0	62.5	54.5	73
024	56.0	66.0	72.0	71.0	67.0	63.0	56.5	76
030	55.0	64.5	70.5	72.5	67.5	61.0	54.0	76
036	58.0	67.5	71.5	70.5	66.5	61.5	55.0	76
041	56.5	64.0	70.0	69.0	66.0	62.5	56.0	74
042	56.0	65.0	71.0	71.5	67.5	62.0	55.0	76
047	61.5	71.5	76.5	75.5	71.5	65.5	56.5	80
048	61.5	68.0	73.5	72.5	69.0	64.0	56.5	78
059	62.0	69.5	73.0	71.0	69.0	63.5	55.0	77
060	63.5	70.0	75.0	75.0	70.5	68.0	61.0	80

NOTE - the octave sound power data does not include tonal correction.

¹ Tested according to AHRI Standard 270-2008 test conditions.

TXV/ORIFICE USAGE

Use this table for C33, C35, CH23, CH33, CH35 and CR33 Field Installed TXV/Orifice Match-Ups.

Model	Refrigerant Metering Orifice (RFC)		Thermal Expansion Valve (TXV)
	Order No.	Orifice Size	
018	10W94	0.052	12J18
024	10W97	0.060	12J18
030	11W00	0.067	12J18
036	11W01	0.071	12J19
041	N/A	N/A	12J20
042	11W06	0.081	12J20
047	N/A	N/A	12J20
048	11W07	0.083	12J20
059	N/A	N/A	12J20
060	11W14	0.096	12J20

CX34, CX35 upflow coils and all Lennox air handlers are shipped with a factory installed TXV. In most cases, no change out of the valve is needed.

If a change out is required it will be listed in the "TXV SUBSTITUTIONS" table. The correct TXV must be ordered separately and field installed.

C33, C35, CH33 and CH35 coils - Use the orifice shipped with the outdoor unit or replace the factory installed orifice with the expansion valve listed.

CR33 and CH23 coils - Use the orifice shipped with the outdoor unit or use the expansion valve listed.

MOST POPULAR MATCHES

Outdoor Unit Model	Indoor Unit Model No
018	CX34-25
024	CX34-25
030	CX34-31
036	CX34-38
041	CX34-49
042	CX34-49
047	CX34-62C
048	CX34-62C
059	CX34-62C
060	CX34-62C

*TXV SUBSTITUTIONS

Use this table to determine if the factory installed TXV in the indoor unit needs to be replaced.

Model	Indoor Coil or Air Handler	Factory TXV	Replacement TXV
030	CX35-48	12J20	12J18
030	CX34-42	12J20	12J18
030	CX34-43	12J20	12J18
030	CX35-48	12J20	12J18
041	CX34-38	12J19	12J20
041	CX35-36	12J19	12J20

*CX34 coils and all air handlers - The factory installed expansion valve must be replaced with the expansion valve listed (ordered separately).

If the combination is not listed above, the factory installed TXV is used.

AHRI STANDARD 210/240

Cooling or heating capacities are net values, including the effects of blower motor heat, and do not include supplementary heat. Power input is the total power input to the compressor(s) and fan(s), plus any controls and other items required as part of the system for normal operation.

Units which do not have an indoor air-circulating blower furnished as part of the model, i.e., split system with indoor coil only, is established by subtracting from the total cooling capacity 1250 Btu/h per 1,000 cfm, and by adding the same amount to the heating capacity. Total power input for both heating and cooling is increased by 365 W per 1,000 cfm of indoor air circulated.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-041-230	TXV	38000	16	13	C35-36B	EL180UH090E48B	9144682
ML14XC1-041-230	TXV	38000	16	13	C35-36B	EL180UH090XE48B	9144683
ML14XC1-041-230	TXV	37400	15.5	12.5	C35-36B		9144684
ML14XC1-041-230	TXV	38500	16	13	C35-48B	EL180UH090E48B	9144686
ML14XC1-041-230	TXV	38500	16	13	C35-48B	EL180UH090XE48B	9144685
ML14XC1-041-230	TXV	37800	15.5	12.5	C35-48B		9144687
ML14XC1-041-230	TXV	38500	17	13.5	C35-48C	EL180UH090E60C	9144688
ML14XC1-041-230	TXV	38500	16	13.5	C35-48C	EL180UH110E60C	9144689
ML14XC1-041-230	TXV	38500	16	13.5	C35-48C	EL180UH110XE60C	9144690
ML14XC1-041-230	TXV	38000	16	13	C35-48C	EL195UH090XE48C	9144691
ML14XC1-041-230	TXV	37800	17	13.5	C35-48C	EL195UH110XE60C	9144692
ML14XC1-041-230	TXV	38000	16	13	C35-48C	EL296UH090XE48C	9144693
ML14XC1-041-230	TXV	37800	17	13.5	C35-48C	EL296UH110XE60C	9144694
ML14XC1-041-230	TXV	38500	16	13.5	C35-48C	EL296UH110XV48C	9144695
ML14XC1-041-230	TXV	38500	17	13.5	C35-48C	SL280UH090V60C	9144696
ML14XC1-041-230	TXV	38500	17	13.5	C35-48C	SL280UH090XV60C	9144697
ML14XC1-041-230	TXV	38000	16	13	C35-48C	SL280UH110V60C	9144698
ML14XC1-041-230	TXV	38000	16	13	C35-48C	SL280UH110XV60C	9144699
ML14XC1-041-230	TXV	37800	15.5	12.5	C35-48C		9144700
ML14XC1-041-230	TXV	39000	17	13.5	C35-49C	EL180UH090E60C	9144701
ML14XC1-041-230	TXV	38500	17	13.5	C35-49C	EL180UH110E60C	9144702
ML14XC1-041-230	TXV	38500	17	13.5	C35-49C	EL180UH110XE60C	9144703
ML14XC1-041-230	TXV	38500	16	13.5	C35-49C	EL195UH090XE48C	9144704
ML14XC1-041-230	TXV	39000	16	13	C35-49C	EL195UH110XE60C	9144705
ML14XC1-041-230	TXV	38500	16	13.5	C35-49C	EL296UH090XE48C	9144706
ML14XC1-041-230	TXV	39000	16	13	C35-49C	EL296UH110XE60C	9144707
ML14XC1-041-230	TXV	38500	16	13	C35-49C	EL296UH110XV48C	9144708
ML14XC1-041-230	TXV	39000	17	13.5	C35-49C	SL280UH090XV60C	9144709
ML14XC1-041-230	TXV	39000	17	13.5	C35-49C	SL280UH110V60C	9144710
ML14XC1-041-230	TXV	38000	15.5	12.5	C35-49C		9144711
ML14XC1-041-230	TXV	38000	16	13	C35-50/60C	EL180UH090E60C	9144712
ML14XC1-041-230	TXV	37800	16	13	C35-50/60C	EL180UH110E60C	9144713
ML14XC1-041-230	TXV	37800	16	13	C35-50/60C	EL180UH110XE60C	9144714
ML14XC1-041-230	TXV	37600	16	13	C35-50/60C	EL195UH090XE48C	9144715
ML14XC1-041-230	TXV	37400	16	13	C35-50/60C	EL195UH110XE60C	9144716
ML14XC1-041-230	TXV	37600	16	13	C35-50/60C	EL296UH090XE48C	9144717
ML14XC1-041-230	TXV	37400	16	13	C35-50/60C	EL296UH110XE60C	9144718
ML14XC1-041-230	TXV	38000	16	13	C35-50/60C	EL296UH110XV48C	9144719
ML14XC1-041-230	TXV	37600	15.1	12.5	C35-50/60C		9144720
ML14XC1-041-230	TXV	39500	17	13.5	C35-60C	EL180UH090E60C	9144721
ML14XC1-041-230	TXV	39000	17	13.5	C35-60C	EL180UH110E60C	9144722
ML14XC1-041-230	TXV	39000	17	13.5	C35-60C	EL180UH110XE60C	9145581
ML14XC1-041-230	TXV	39000	17	13.5	C35-60C	EL195UH090XE48C	9144723
ML14XC1-041-230	TXV	39500	17	13.5	C35-60C	EL195UH110XE60C	9144724
ML14XC1-041-230	TXV	39000	17	13.5	C35-60C	EL296UH090XE48C	9144725
ML14XC1-041-230	TXV	39500	17	13.5	C35-60C	EL296UH110XE60C	9144726
ML14XC1-041-230	TXV	39000	17	13.5	C35-60C	SLP98UH090XV48C	9144727
ML14XC1-041-230	TXV	38500	15.5	13	C35-60C		9144728
ML14XC1-041-230	TXV	38500	16	13	CBA27UHE-048		10259425

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-041-230	TXV	37200	16	13	CBX25UH-042		9144729
ML14XC1-041-230	TXV	38000	16	13	CBX25UH-048		9144730
ML14XC1-041-230	TXV	38000	17	13.5	CBX25UHV-042		9144731
ML14XC1-041-230	TXV	38500	17	13.5	CBX25UHV-048		9144732
ML14XC1-041-230	TXV	38500	16	13.5	CBX27UH-048		9144733
ML14XC1-041-230	TXV	38000	16	13	CBX32MV-048		9144734
ML14XC1-041-230	TXV	38000	16	13	CBX40UHV-048		9144735
ML14XC1-041-230	TXV	36400	16	13	CH23-51	EL180UH090E60C	9144736
ML14XC1-041-230	TXV	36600	16	13	CH23-51	SL280UH090V60C	9144737
ML14XC1-041-230	TXV	37000	16	13.5	CH23-65	EL180UH090E60C	9144738
ML14XC1-041-230	TXV	37000	16	13	CH23-65	SL280UH090V60C	9144739
ML14XC1-041-230	TXV	38000	16	13	CH33-43	EL180UH090E60C	9144745
ML14XC1-041-230	TXV	38000	16	13	CH33-43B	EL180UH090E48B	9144740
ML14XC1-041-230	TXV	38000	16	13	CH33-43B	EL180UH090XE48B	9144741
ML14XC1-041-230	TXV	38000	16	13	CH33-43B	SL280UH090V36B	9144742
ML14XC1-041-230	TXV	38000	16	13	CH33-43B	SL280UH090V48B	9144743
ML14XC1-041-230	TXV	38000	16	13	CH33-43B	SL280UH090XV48B	9144744
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL180UH110E60C	9144746
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL180UH110XE60C	9144747
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL195UH090XE48C	9144748
ML14XC1-041-230	TXV	37600	16	13.5	CH33-43C	EL195UH110XE60C	9144749
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL296UH090XE48C	9144750
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL296UH090XV36C	9144751
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL296UH090XV48C	9144752
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	EL296UH090XV60C	9144753
ML14XC1-041-230	TXV	37600	16	13.5	CH33-43C	EL296UH110XE60C	9144754
ML14XC1-041-230	TXV	38500	16	13.5	CH33-43C	EL296UH110XV60C	9144755
ML14XC1-041-230	TXV	38500	16	13.5	CH33-43C	SL280UH090V60C	9144756
ML14XC1-041-230	TXV	38500	16	13.5	CH33-43C	SL280UH090XV60C	9144757
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	SL280UH110V60C	9144758
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	SL280UH110XV60C	9144759
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	SLP98UH090XV36C	9144760
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	SLP98UH090XV48C	9144761
ML14XC1-041-230	TXV	38000	16	13	CH33-43C	SLP98UH090XV60C	9144762
ML14XC1-041-230	TXV	38500	16	13.5	CH33-43C	SLP98UH110XV60C	9144763
ML14XC1-041-230	TXV	37800	16	13	CH33-44/48B	EL180UH090E48B	9144764
ML14XC1-041-230	TXV	37800	16	13	CH33-44/48B	EL180UH090XE48B	9144765
ML14XC1-041-230	TXV	38000	16	13	CH33-48C	EL180UH090E60C	9144766
ML14XC1-041-230	TXV	37800	16	13	CH33-48C	EL180UH110E60C	9144767
ML14XC1-041-230	TXV	37800	16	13	CH33-48C	EL180UH110XE60C	9144768
ML14XC1-041-230	TXV	37600	16	13	CH33-48C	EL195UH090XE48C	9144769
ML14XC1-041-230	TXV	37400	16	13	CH33-48C	EL195UH110XE60C	9144770
ML14XC1-041-230	TXV	37600	16	13	CH33-48C	EL296UH090XE48C	9144771
ML14XC1-041-230	TXV	37600	16	13	CH33-48C	EL296UH090XV36C	9144772
ML14XC1-041-230	TXV	37800	16	13	CH33-48C	EL296UH090XV48C	9144773
ML14XC1-041-230	TXV	37400	16	13	CH33-48C	EL296UH110XE60C	9144774
ML14XC1-041-230	TXV	37600	16	13	CH33-48C	SLP98UH090XV36C	9144775
ML14XC1-041-230	TXV	37800	16	13	CH33-48C	SLP98UH090XV48C	9144776
ML14XC1-041-230	TXV	38500	17	13.5	CH33-49	EL180UH090E60C	9144777

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-041-230	TXV	38500	17	13.5	CH33-49	EL180UH110E60C	9144778
ML14XC1-041-230	TXV	38500	17	13.5	CH33-49	EL180UH110XE60C	9144779
ML14XC1-041-230	TXV	38500	16	13	CH33-49	EL195UH090XE48C	9144780
ML14XC1-041-230	TXV	39000	16	13	CH33-49	EL195UH110XE60C	9144781
ML14XC1-041-230	TXV	38500	16	13	CH33-49	EL296UH090XE48C	9144782
ML14XC1-041-230	TXV	39000	16	13	CH33-49	EL296UH110XE60C	9144783
ML14XC1-041-230	TXV	38500	16	13.5	CH33-50/60C	EL180UH090E60C	9144784
ML14XC1-041-230	TXV	38500	16	13.5	CH33-50/60C	EL180UH110E60C	9144785
ML14XC1-041-230	TXV	38500	16	13.5	CH33-50/60C	EL180UH110XE60C	9144786
ML14XC1-041-230	TXV	38000	16	13	CH33-50/60C	EL195UH090XE48C	9144787
ML14XC1-041-230	TXV	38500	16	13	CH33-50/60C	EL195UH110XE60C	9144788
ML14XC1-041-230	TXV	38000	16	13	CH33-50/60C	EL296UH090XE48C	9144789
ML14XC1-041-230	TXV	38500	16	13	CH33-50/60C	EL296UH110XE60C	9144790
ML14XC1-041-230	TXV	38000	15.5	12.5	CH33-50/60C		9144791
ML14XC1-041-230	TXV	39000	16	13.5	CH35-42B	EL180UH090E48B	9144792
ML14XC1-041-230	TXV	38500	16	13	CH35-42B	EL296UH045XV36B	9973357
ML14XC1-041-230	TXV	39000	16	13	CH35-42B	SL280UH090V36B	9144794
ML14XC1-041-230	TXV	39000	16	13	CH35-42B	SL280UH090V48B	9144795
ML14XC1-041-230	TXV	38500	16	13	CH35-42B	SLP98UH070XV36B	9144796
ML14XC1-041-230	TXV	38500	15.5	12.5	CH35-42B		9144797
ML14XC1-041-230	TXV	38500	16	13.5	CH35-42C	EL180UH090E60C	9144798
ML14XC1-041-230	TXV	38500	16	13.5	CH35-42C	EL180UH110E60C	9144799
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	EL195UH090XE48C	9144800
ML14XC1-041-230	TXV	37800	17	13.5	CH35-42C	EL195UH110XE60C	9144801
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	EL296UH090XE48C	9144802
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	EL296UH090XV36C	9144803
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	EL296UH090XV48C	9144804
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	EL296UH090XV60C	9144805
ML14XC1-041-230	TXV	37800	17	13.5	CH35-42C	EL296UH110XE60C	9144806
ML14XC1-041-230	TXV	38500	16	13	CH35-42C	EL296UH110XV48C	9144807
ML14XC1-041-230	TXV	38500	16	13.5	CH35-42C	EL296UH110XV60C	9144808
ML14XC1-041-230	TXV	38500	17	13.5	CH35-42C	SL280UH090V60C	9144809
ML14XC1-041-230	TXV	38500	16	13	CH35-42C	SL280UH110V60C	9144810
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	SLP98UH090XV36C	9144811
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	SLP98UH090XV48C	9144812
ML14XC1-041-230	TXV	38000	16	13	CH35-42C	SLP98UH090XV60C	9144813
ML14XC1-041-230	TXV	38500	16	13.5	CH35-42C	SLP98UH110XV60C	9144814
ML14XC1-041-230	TXV	37800	15.5	12.5	CH35-42C		9144815
ML14XC1-041-230	TXV	38000	16	13	CH35-48B	EL180UH090E48B	9144816
ML14XC1-041-230	TXV	37800	16	13	CH35-48B	EL296UH045XV36B	9973358
ML14XC1-041-230	TXV	37600	15.5	12.5	CH35-48B		9144818
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	EL180UH090E60C	9144819
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	EL180UH110E60C	9144820
ML14XC1-041-230	TXV	37800	16	13	CH35-48C	EL195UH090XE48C	9144821
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	EL195UH110XE60C	9144822
ML14XC1-041-230	TXV	37800	16	13	CH35-48C	EL296UH090XV36C	9144823
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	EL296UH090XV48C	9144824
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	EL296UH110XE60C	9144825
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	EL296UH110XV48C	9144826

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-041-230	TXV	37800	16	13	CH35-48C	SL280UH090V60C	9144827
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	SL280UH110V60C	9144828
ML14XC1-041-230	TXV	37800	16	13	CH35-48C	SLP98UH090XV36C	9144829
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	SLP98UH090XV48C	9144830
ML14XC1-041-230	TXV	37800	16	13	CH35-48C	SLP98UH090XV60C	9144831
ML14XC1-041-230	TXV	38000	16	13	CH35-48C	SLP98UH110XV60C	9144832
ML14XC1-041-230	TXV	37600	15.5	12.5	CH35-48C		9144833
ML14XC1-041-230	TXV	39000	17	13.5	CH35-51C	EL180UH090E60C	9144834
ML14XC1-041-230	TXV	38500	17	13.5	CH35-51C	EL180UH110E60C	9144835
ML14XC1-041-230	TXV	38500	16	13	CH35-51C	EL195UH090XE48C	9144836
ML14XC1-041-230	TXV	39000	16	13	CH35-51C	EL195UH110XE60C	9144837
ML14XC1-041-230	TXV	38500	16	13	CH35-51C	EL296UH090XE48C	9144838
ML14XC1-041-230	TXV	39000	16	13	CH35-51C	EL296UH110XE60C	9144839
ML14XC1-041-230	TXV	39000	16	13	CH35-51C	EL296UH110XV48C	9144840
ML14XC1-041-230	TXV	38500	16	13	CH35-51C	SLP98UH090XV36C	9144841
ML14XC1-041-230	TXV	38500	16	13	CH35-51C	SLP98UH090XV48C	9144842
ML14XC1-041-230	TXV	39000	16	13	CH35-51C	SLP98UH090XV60C	9144843
ML14XC1-041-230	TXV	38500	16	13	CH35-51C	SLP98UH110XV60C	9144844
ML14XC1-041-230	TXV	38500	15.5	12.5	CH35-51C		9144845
ML14XC1-041-230	TXV	37600	16	13	CR33-50/60	EL195DF090XE48C	9144846
ML14XC1-041-230	TXV	37400	16	13	CR33-50/60	EL195DF110XE60C	9144847
ML14XC1-041-230	TXV	37600	16	13	CR33-50/60	EL296DF090XE48C	9144848
ML14XC1-041-230	TXV	37400	16	13	CR33-50/60	EL296DF090XV60C	9144849
ML14XC1-041-230	TXV	37400	16	13	CR33-50/60	EL296DF110XE60C	9144850
ML14XC1-041-230	TXV	37400	16	13	CR33-50/60	EL296DF110XV60C	9144851
ML14XC1-041-230	TXV	37800	16	13	CR33-50/60	SL280DF090V60C	9144852
ML14XC1-041-230	TXV	38000	16	13.5	CR33-50/60	SL280DF110V60C	9144853
ML14XC1-041-230	TXV	38000	16	13	CX35-36B	EL180UH090E48B	9144924
ML14XC1-041-230	TXV	38000	16	13	CX35-36B	EL180UH090XE48B	9144925
ML14XC1-041-230	TXV	37600	16	13	CX35-36B	EL296UH045XV36B	9973353
ML14XC1-041-230	TXV	37800	16	13	CX35-36B	SL280UH090V36B	9144927
ML14XC1-041-230	TXV	38000	16	13	CX35-36B	SL280UH090V48B	9144928
ML14XC1-041-230	TXV	37600	15.5	13	CX35-36B	SLP98UH070XV36B	10040418
ML14XC1-041-230	TXV	37400	15.5	12.5	CX35-36B		9144930
ML14XC1-041-230	TXV	38500	16	13	CX35-48B	EL180UH090E48B	9144931
ML14XC1-041-230	TXV	38500	16	13	CX35-48B	EL180UH090XE48B	9144932
ML14XC1-041-230	TXV	37800	16	13	CX35-48B	EL296UH045XV36B	9973354
ML14XC1-041-230	TXV	38000	16	13	CX35-48B	SL280UH090V36B	9144934
ML14XC1-041-230	TXV	38500	16	13	CX35-48B	SL280UH090V48B	9144935
ML14XC1-041-230	TXV	37800	16	13	CX35-48B	SLP98UH070XV36B	10040419
ML14XC1-041-230	TXV	37800	15.5	12.5	CX35-48B		9144937
ML14XC1-041-230	TXV	38500	17	13.5	CX35-48C	EL180UH090E60C	9144938
ML14XC1-041-230	TXV	38500	16	13.5	CX35-48C	EL180UH110E60C	9144939
ML14XC1-041-230	TXV	38500	16	13.5	CX35-48C	EL180UH110XE60C	9144940
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	EL195UH090XE48C	9144941
ML14XC1-041-230	TXV	37800	17	13.5	CX35-48C	EL195UH110XE60C	9144942
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	EL296UH090XE48C	9144943
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	EL296UH090XV36C	9144944
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	EL296UH090XV48C	9144945

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	EL296UH090XV60C	9144946
ML14XC1-041-230	TXV	37800	17	13.5	CX35-48C	EL296UH110XE60C	9144947
ML14XC1-041-230	TXV	38500	16	13	CX35-48C	EL296UH110XV48C	9144948
ML14XC1-041-230	TXV	38500	16	13.5	CX35-48C	EL296UH110XV60C	9144949
ML14XC1-041-230	TXV	38500	17	13.5	CX35-48C	SL280UH090V60C	9144950
ML14XC1-041-230	TXV	38500	17	13.5	CX35-48C	SL280UH090XV60C	9144951
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	SL280UH110V60C	9144952
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	SL280UH110XV60C	9144953
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	SLP98UH090XV36C	9144954
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	SLP98UH090XV48C	9144955
ML14XC1-041-230	TXV	38000	16	13	CX35-48C	SLP98UH090XV60C	9144956
ML14XC1-041-230	TXV	38500	16	13.5	CX35-48C	SLP98UH110XV60C	9144957
ML14XC1-041-230	TXV	37800	15.5	12.5	CX35-48C		9144958
ML14XC1-041-230	TXV	39000	17	13.5	CX35-49C	EL180UH090E60C	9144959
ML14XC1-041-230	TXV	38500	17	13.5	CX35-49C	EL180UH110E60C	9144960
ML14XC1-041-230	TXV	38500	17	13.5	CX35-49C	EL180UH110XE60C	9144961
ML14XC1-041-230	TXV	38500	16	13.5	CX35-49C	EL195UH090XE48C	9144962
ML14XC1-041-230	TXV	39000	16	13	CX35-49C	EL195UH110XE60C	9144963
ML14XC1-041-230	TXV	38500	16	13.5	CX35-49C	EL296UH090XE48C	9144965
ML14XC1-041-230	TXV	38500	16	13	CX35-49C	EL296UH090XV36C	9144964
ML14XC1-041-230	TXV	38500	16	13	CX35-49C	EL296UH090XV48C	9144966
ML14XC1-041-230	TXV	39000	16	13	CX35-49C	EL296UH110XE60C	9144968
ML14XC1-041-230	TXV	38500	16	13	CX35-49C	EL296UH110XV48C	9144967
ML14XC1-041-230	TXV	39000	16	13.5	CX35-49C	EL296UH110XV60C	9144969
ML14XC1-041-230	TXV	39000	17	13.5	CX35-49C	SL280UH090V60C	9144970
ML14XC1-041-230	TXV	38500	16	13	CX35-49C	SL280UH110V60C	9144971
ML14XC1-041-230	TXV	38500	16	13	CX35-49C	SLP98UH090XV36C	9144972
ML14XC1-041-230	TXV	38500	16	13	CX35-49C	SLP98UH090XV48C	9144973
ML14XC1-041-230	TXV	39000	16	13	CX35-49C	SLP98UH090XV60C	9144974
ML14XC1-041-230	TXV	39000	16	13.5	CX35-49C	SLP98UH110XV60C	9144975
ML14XC1-041-230	TXV	38000	15.5	12.5	CX35-49C		9144976
ML14XC1-041-230	TXV	38000	16	13	CX35-50/60C	EL180UH090E60C	9144983
ML14XC1-041-230	TXV	37800	16	13	CX35-50/60C	EL180UH110E60C	9144984
ML14XC1-041-230	TXV	37800	16	13	CX35-50/60C	EL180UH110XE60C	9144985
ML14XC1-041-230	TXV	37600	16	13	CX35-50/60C	EL195UH090XE48C	9144986
ML14XC1-041-230	TXV	37400	16	13	CX35-50/60C	EL195UH110XE60C	9144987
ML14XC1-041-230	TXV	37600	16	13	CX35-50/60C	EL296UH090XE48C	9144988
ML14XC1-041-230	TXV	37400	16	13	CX35-50/60C	EL296UH110XE60C	9144989
ML14XC1-041-230	TXV	38000	16	13	CX35-50/60C	EL296UH110XV48C	9144977
ML14XC1-041-230	TXV	37600	16	13	CX35-50/60C	SLP98UH090XV36C	9144978
ML14XC1-041-230	TXV	37800	16	13	CX35-50/60C	SLP98UH090XV48C	9144979
ML14XC1-041-230	TXV	37600	16	13	CX35-50/60C	SLP98UH090XV60C	9144980
ML14XC1-041-230	TXV	38000	16	13	CX35-50/60C	SLP98UH110XV60C	9144981
ML14XC1-041-230	TXV	37600	15.1	12.5	CX35-50/60C		9144982
ML14XC1-041-230	TXV	39500	17	13.5	CX35-60C	EL180UH090E60C	9144991
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	EL180UH110E60C	9144992
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	EL180UH110XE60C	9144993
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	EL195UH090XE48C	9144994
ML14XC1-041-230	TXV	39500	17	13.5	CX35-60C	EL195UH110XE60C	9144995

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	EL296UH090XE48C	9144996
ML14XC1-041-230	TXV	39000	16	13.5	CX35-60C	EL296UH090XV36C	9144997
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	EL296UH090XV48C	9144998
ML14XC1-041-230	TXV	39500	16	13.5	CX35-60C	EL296UH090XV60C	9144999
ML14XC1-041-230	TXV	39500	17	13.5	CX35-60C	EL296UH110XE60C	9145000
ML14XC1-041-230	TXV	39500	17	13.5	CX35-60C	EL296UH110XV60C	9145001
ML14XC1-041-230	TXV	39500	17	13.5	CX35-60C	SL280UH090V60C	9145002
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	SL280UH110V60C	9145003
ML14XC1-041-230	TXV	39000	16	13.5	CX35-60C	SLP98UH090XV36C	9145004
ML14XC1-041-230	TXV	39000	17	13.5	CX35-60C	SLP98UH090XV48C	9145005
ML14XC1-041-230	TXV	39500	16	13.5	CX35-60C	SLP98UH090XV60C	9145006
ML14XC1-041-230	TXV	39500	17	13.5	CX35-60C	SLP98UH110XV60C	9145007
ML14XC1-041-230	TXV	38500	15.5	13	CX35-60C		9144990
ML14XC1-041-230	TXV	38000	15.5	12.5	CX38-49C		10551936
ML14XC1-047-230	TXV	46500	15.1	12.5	C35-48B	EL180UH090E48B	9146178
ML14XC1-047-230	TXV	46500	15.1	12.5	C35-48B	EL180UH090XE48B	9146179
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL180UH090E60C	9146180
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL180UH110E60C	9146181
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL180UH110XE60C	9146182
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL195UH090XE48C	9146183
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL195UH110XE60C	9146184
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL296UH090XE48C	9146185
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL296UH090XV48C	9146186
ML14XC1-047-230	TXV	47500	15.5	12.5	C35-49C	EL296UH090XV60C	9146187
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	EL296UH110XE60C	9146188
ML14XC1-047-230	TXV	47500	15.1	12.5	C35-49C	EL296UH110XV60C	9146189
ML14XC1-047-230	TXV	47500	15.5	12.5	C35-49C	SL280UH090V60C	9146190
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	SL280UH110V60C	9146191
ML14XC1-047-230	TXV	47000	15.5	12.5	C35-49C	SLP98UH090XV48C	9146192
ML14XC1-047-230	TXV	47500	15.5	12.5	C35-49C	SLP98UH090XV60C	9146193
ML14XC1-047-230	TXV	47500	15.1	12.5	C35-49C	SLP98UH110XV60C	9146194
ML14XC1-047-230	TXV	47000	14.5	12.2	C35-49C		9850163
ML14XC1-047-230	TXV	47000	14.5	12.2	C35-49C		9850173
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL180UH090E60C	9146195
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL180UH110E60C	9146196
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL180UH110XE60C	9146197
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL195UH090XE48C	9146198
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL195UH110XE60C	9146199
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL296UH090XE48C	9146200
ML14XC1-047-230	TXV	46000	15.1	12.5	C35-50/60C	EL296UH110XE60C	9146201
ML14XC1-047-230	TXV	46000	14.5	12.2	C35-50/60C		9850164
ML14XC1-047-230	TXV	48000	16	13	C35-60C	EL180UH090E60C	9146202
ML14XC1-047-230	TXV	48000	16	13	C35-60C	EL180UH110E60C	9146203
ML14XC1-047-230	TXV	48000	16	13	C35-60C	EL180UH110XE60C	9146204
ML14XC1-047-230	TXV	48000	15.5	12.5	C35-60C	EL195UH090XE48C	9146205
ML14XC1-047-230	TXV	48000	16	13	C35-60C	EL195UH110XE60C	9146206
ML14XC1-047-230	TXV	48000	15.5	12.5	C35-60C	EL296UH090XE48C	9146207
ML14XC1-047-230	TXV	48000	16	13	C35-60C	EL296UH110XE60C	9146208
ML14XC1-047-230	TXV	48000	16	13	C35-60C	SL280UH090V60C	9146209

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-047-230	TXV	48000	16	13	C35-60C	SL280UH090XV60C	9146210
ML14XC1-047-230	TXV	48000	16	13	C35-60C	SL280UH110V60C	9146211
ML14XC1-047-230	TXV	48000	16	13	C35-60C	SL280UH110XV60C	9146212
ML14XC1-047-230	TXV	48000	15.1	12.5	C35-60C		9146213
ML14XC1-047-230	TXV	48000	16	13	C35-60D	EL180UH135E60D	9146214
ML14XC1-047-230	TXV	47500	15.5	12.5	C35-60D	EL195UH135XE60D	9146215
ML14XC1-047-230	TXV	47500	15.5	12.5	C35-60D	EL296UH135XE60D	9146216
ML14XC1-047-230	TXV	47000	14.5	12.2	C35-60D		9850165
ML14XC1-047-230	TXV	47000	16	13	CBA27UHE-048		10259428
ML14XC1-047-230	TXV	47000	15.1	12.5	CBX25UH-048		9146217
ML14XC1-047-230	TXV	47500	16	13	CBX25UHV-048		9146218
ML14XC1-047-230	TXV	47000	16	13	CBX27UH-048		9146219
ML14XC1-047-230	TXV	46500	16	13	CBX32MV-060		9146220
ML14XC1-047-230	TXV	47000	15.1	12.5	CBX40UHV-060		9146221
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-43	SL280UH090V60C	9146233
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-43	SL280UH110V60C	9146234
ML14XC1-047-230	TXV	47500	15.5	12.5	CH33-43B	EL180UH090E48B	9146222
ML14XC1-047-230	TXV	47500	15.5	12.5	CH33-43B	EL180UH090XE48B	9146223
ML14XC1-047-230	TXV	47500	15.1	12.5	CH33-43B	SL280UH090V48B	9146224
ML14XC1-047-230	TXV	47500	15.1	12.5	CH33-43B	SL280UH090XV48B	9146225
ML14XC1-047-230	TXV	46500	15.5	12.5	CH33-43C	EL180UH090E60C	9146226
ML14XC1-047-230	TXV	46500	15.5	12.5	CH33-43C	EL180UH110E60C	9146227
ML14XC1-047-230	TXV	46500	15.5	12.5	CH33-43C	EL180UH110XE60C	9146228
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-43C	EL195UH090XE48C	9146229
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-43C	EL195UH110XE60C	9146230
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-43C	EL296UH090XE48C	9146231
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-43C	EL296UH110XE60C	9146232
ML14XC1-047-230	TXV	46500	14.5	12.2	CH33-43C		9146235
ML14XC1-047-230	TXV	46000	14.5	12.5	CH33-44/48	EL180UH090E48B	9146236
ML14XC1-047-230	TXV	46000	14.5	12.5	CH33-44/48	EL180UH090XE48B	9146237
ML14XC1-047-230	TXV	46000	14.5	12.2	CH33-44/48	SL280UH090V48B	9146238
ML14XC1-047-230	TXV	46000	14.5	12.2	CH33-44/48	SL280UH090XV48B	9146239
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL180UH090E60C	9146240
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL180UH110E60C	9146241
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL180UH110XE60C	9146242
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL195UH090XE48C	9146243
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL195UH110XE60C	9146244
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL296UH090XE48C	9146245
ML14XC1-047-230	TXV	46000	14.5	12.5	CH33-48C	EL296UH090XV48C	9146246
ML14XC1-047-230	TXV	46500	14.5	12.5	CH33-48C	EL296UH090XV60C	9146247
ML14XC1-047-230	TXV	46000	15.1	12.5	CH33-48C	EL296UH110XE60C	9146248
ML14XC1-047-230	TXV	46500	14.5	12.5	CH33-48C	EL296UH110XV60C	9146249
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-48C	SL280UH090V60C	9146250
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-48C	SL280UH090XV60C	9146251
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-48C	SL280UH110V60C	9146252
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-48C	SL280UH110XV60C	9146253
ML14XC1-047-230	TXV	46000	14.5	12.5	CH33-48C	SLP98UH090XV48C	9146254
ML14XC1-047-230	TXV	46500	14.5	12.5	CH33-48C	SLP98UH090XV60C	9146255
ML14XC1-047-230	TXV	46500	14.5	12.5	CH33-48C	SLP98UH110XV60C	9146256

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-047-230	TXV	46000	14.5	12.2	CH33-48C		9146257
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL180UH090E60C	9146258
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL180UH110E60C	9146259
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL180UH110XE60C	9146260
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL195UH090XE48C	9146261
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL195UH110XE60C	9146262
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL296UH090XE48C	9146263
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-49	EL296UH090XV48C	9146264
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-49	EL296UH090XV60C	9146265
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-49	EL296UH110XE60C	9146266
ML14XC1-047-230	TXV	47500	15.1	12.5	CH33-49	EL296UH110XV60C	9146267
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-49	SLP98UH090XV48C	9146268
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-49	SLP98UH090XV60C	9146269
ML14XC1-047-230	TXV	47500	15.1	12.5	CH33-49	SLP98UH110XV60C	9146270
ML14XC1-047-230	TXV	47000	14.5	12.2	CH33-49		9829640
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-50/60C	EL180UH090E60C	9146271
ML14XC1-047-230	TXV	46500	15.5	12.5	CH33-50/60C	EL180UH110E60C	9146272
ML14XC1-047-230	TXV	46500	15.5	12.5	CH33-50/60C	EL180UH110XE60C	9146273
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-50/60C	EL195UH090XE48C	9146274
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-50/60C	EL195UH110XE60C	9146275
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-50/60C	EL296UH090XE48C	9146276
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-50/60C	EL296UH110XE60C	9146277
ML14XC1-047-230	TXV	47000	14.5	12.2	CH33-50/60C		9146278
ML14XC1-047-230	TXV	47000	15.5	12.5	CH33-60D	EL180UH135E60D	9146279
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-60D	EL195UH135XE60D	9146280
ML14XC1-047-230	TXV	46500	15.1	12.5	CH33-60D	EL296UH135XE60D	9146281
ML14XC1-047-230	TXV	47500	15.5	12.5	CH33-62D	EL180UH135E60D	9146282
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-62D	EL195UH135XE60D	9146283
ML14XC1-047-230	TXV	47000	15.1	12.5	CH33-62D	EL296UH135XE60D	9146284
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-42B	EL180UH090E48B	9146285
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-42B	SL280UH090XV48B	9146286
ML14XC1-047-230	TXV	47500	14.5	12.5	CH35-42B		9146287
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-42C	EL180UH090E60C	9146288
ML14XC1-047-230	TXV	46500	15.5	12.5	CH35-42C	EL180UH110E60C	9146289
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-42C	EL195UH090XE48C	9146290
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-42C	EL195UH110XE60C	9146291
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-42C	EL296UH090XE48C	9146292
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-42C	EL296UH110XE60C	9146293
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-42C	SL280UH090V60C	9146294
ML14XC1-047-230	TXV	47000	15.1	12.5	CH35-42C	SL280UH110V60C	9146295
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-42C	SLP98UH090XV48C	9146296
ML14XC1-047-230	TXV	47000	15.1	12.5	CH35-42C	SLP98UH090XV60C	9146297
ML14XC1-047-230	TXV	47000	15.1	12.5	CH35-42C	SLP98UH110XV60C	9146298
ML14XC1-047-230	TXV	46500	14.5	12.2	CH35-42C		9146299
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48B	EL180UH090E48B	9146300
ML14XC1-047-230	TXV	46500	14.5	12.2	CH35-48B	SL280UH090V48B	9146301
ML14XC1-047-230	TXV	46500	14.5	12.2	CH35-48B		9146302
ML14XC1-047-230	TXV	46500	15.5	12.5	CH35-48C	EL180UH090E60C	9146303
ML14XC1-047-230	TXV	46500	15.5	12.5	CH35-48C	EL180UH110E60C	9146304

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL195UH090XE48C	9146305
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL195UH110XE60C	9146306
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL296UH090XE48C	9146307
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL296UH090XV48C	9146308
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL296UH090XV60C	9146309
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL296UH110XE60C	9146310
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	EL296UH110XV60C	9146311
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	SL280UH090V60C	9146312
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	SL280UH110V60C	9146313
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	SLP98UH090XV48C	9146314
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	SLP98UH090XV60C	9146315
ML14XC1-047-230	TXV	46500	15.1	12.5	CH35-48C	SLP98UH110XV60C	9146316
ML14XC1-047-230	TXV	46500	14.5	12.2	CH35-48C		9146317
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-51C	EL180UH090E60C	9146318
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-51C	EL180UH110E60C	9146319
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-51C	EL195UH090XE48C	9146320
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-51C	EL195UH110XE60C	9146321
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-51C	EL296UH090XE48C	9146322
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-51C	EL296UH090XV48C	9146323
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-51C	EL296UH090XV60C	9146324
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-51C	EL296UH110XE60C	9146325
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-51C	EL296UH110XV60C	9146326
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-51C	SL280UH090V60C	9146327
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-51C	SL280UH110V60C	9146328
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-51C	SLP98UH090XV48C	9146329
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-51C	SLP98UH090XV60C	9146330
ML14XC1-047-230	TXV	47500	15.1	12.5	CH35-51C	SLP98UH110XV60C	9146331
ML14XC1-047-230	TXV	47000	14.5	12.2	CH35-51C		9146332
ML14XC1-047-230	TXV	47500	15.5	12.5	CH35-60D	EL180UH135E60D	9146333
ML14XC1-047-230	TXV	47000	15.1	12.5	CH35-60D	EL195UH135XE60D	9146334
ML14XC1-047-230	TXV	47000	15.1	12.5	CH35-60D	EL296UH135XE60D	9146335
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-60D	SL280UH135V60D	9146336
ML14XC1-047-230	TXV	47000	15.5	12.5	CH35-60D	SLP98UH135XV60D	10040420
ML14XC1-047-230	TXV	47000	14.5	12.2	CH35-60D		9146338
ML14XC1-047-230	TXV	46500	15.5	12.5	CR33-50/60	EL180DF110E60C	9146339
ML14XC1-047-230	TXV	46000	15.1	12.5	CR33-50/60	EL195DF090XE48C	9146340
ML14XC1-047-230	TXV	46000	15.1	12.5	CR33-50/60	EL195DF110XE60C	9146341
ML14XC1-047-230	TXV	46000	15.1	12.5	CR33-50/60	EL296DF090XE48C	9146342
ML14XC1-047-230	TXV	46000	15.1	12.5	CR33-50/60	EL296DF110XE60C	9146343
ML14XC1-047-230	TXV	46500	15.5	12.5	CR33-50/60	SL280DF090V60C	9146344
ML14XC1-047-230	TXV	46500	15.5	12.5	CR33-50/60	SL280DF110V60C	9146345
ML14XC1-047-230	TXV	46000	14.5	12.2	CR33-50/60		10238958
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48B	EL180UH090E48B	9146459
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48B	EL180UH090XE48B	9146460
ML14XC1-047-230	TXV	46500	14.5	12.5	CX35-48B	SL280UH090V48B	9146461
ML14XC1-047-230	TXV	46500	14.5	12.5	CX35-48B	SL280UH090XV48B	9146462
ML14XC1-047-230	TXV	46500	15.5	12.5	CX35-48C	EL180UH090E60C	9146463
ML14XC1-047-230	TXV	47000	14.5	12.5	CX35-48C	EL180UH110E60C	9146464
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	EL195UH090XE48C	9146465

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	EL195UH110XE60C	9146466
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	EL296UH090XE48C	9146467
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	EL296UH090XV48C	9146468
ML14XC1-047-230	TXV	46500	14.5	12.5	CX35-48C	EL296UH090XV60C	9146469
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	EL296UH110XE60C	9146470
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	EL296UH110XV60C	9146471
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	SL280UH090V60C	9146472
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	SL280UH110V60C	9146473
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	SLP98UH090XV48C	9146474
ML14XC1-047-230	TXV	46500	14.5	12.5	CX35-48C	SLP98UH090XV60C	9146475
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-48C	SLP98UH110XV60C	9146476
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL180UH090E60C	9146479
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL180UH110E60C	9146477
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL180UH110XE60C	9146478
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL195UH090XE48C	9146480
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL195UH110XE60C	9146481
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL296UH090XE48C	9146482
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL296UH090XV48C	9146483
ML14XC1-047-230	TXV	47500	15.5	12.5	CX35-49C	EL296UH090XV60C	9146484
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	EL296UH110XE60C	9146485
ML14XC1-047-230	TXV	47500	15.1	12.5	CX35-49C	EL296UH110XV60C	9146486
ML14XC1-047-230	TXV	47500	15.5	12.5	CX35-49C	SL280UH090V60C	9146487
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	SL280UH110V60C	9146488
ML14XC1-047-230	TXV	47000	15.5	12.5	CX35-49C	SLP98UH090XV48C	9146489
ML14XC1-047-230	TXV	47500	15.5	12.5	CX35-49C	SLP98UH090XV60C	9146490
ML14XC1-047-230	TXV	47500	15.1	12.5	CX35-49C	SLP98UH110XV60C	9146491
ML14XC1-047-230	TXV	47000	14.5	12.2	CX35-49C		9146492
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL180UH090E60C	9146493
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL180UH110E60C	9146494
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL180UH110XE60C	9146495
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL195UH090XE48C	9146496
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL195UH110XE60C	9146497
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL296UH090XE48C	9146498
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	EL296UH110XE60C	9146499
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-50/60C	SL280UH090V60C	9146500
ML14XC1-047-230	TXV	46500	15.1	12.5	CX35-50/60C	SL280UH090XV60C	9146501
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	SL280UH110V60C	9146502
ML14XC1-047-230	TXV	46000	15.1	12.5	CX35-50/60C	SL280UH110XV60C	9146503
ML14XC1-047-230	TXV	46000	14.5	12.5	CX35-50/60C	SLP98UH090XV48C	9146504
ML14XC1-047-230	TXV	46000	14.5	12.2	CX35-50/60C	SLP98UH090XV60C	9146505
ML14XC1-047-230	TXV	46500	14.5	12.5	CX35-50/60C	SLP98UH110XV60C	9146506
ML14XC1-047-230	TXV	46000	14.5	12.2	CX35-50/60C		9146507
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	EL180UH090E60C	9146508
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	EL180UH110E60C	9146509
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	EL180UH110XE60C	9146510
ML14XC1-047-230	TXV	48000	15.5	12.5	CX35-60C	EL195UH090XE48C	9146511
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	EL195UH110XE60C	9146512
ML14XC1-047-230	TXV	48000	15.5	12.5	CX35-60C	EL296UH090XE48C	9146513
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	EL296UH110XE60C	9146514

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	SL280UH090V60C	9146515
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	SL280UH090XV60C	9146516
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	SL280UH110V60C	9146517
ML14XC1-047-230	TXV	48000	16	13	CX35-60C	SL280UH110XV60C	9146518
ML14XC1-047-230	TXV	48000	15.5	12.5	CX35-60C	SLP98UH090XV48C	9146519
ML14XC1-047-230	TXV	48000	15.5	12.5	CX35-60C	SLP98UH090XV60C	9146520
ML14XC1-047-230	TXV	48000	15.5	12.5	CX35-60C	SLP98UH110XV60C	9146521
ML14XC1-047-230	TXV	48000	15.1	12.5	CX35-60C		9146522
ML14XC1-047-230	TXV	48000	16	13	CX35-60D	EL180UH135E60D	9146523
ML14XC1-047-230	TXV	47500	15.5	12.5	CX35-60D	EL195UH135XE60D	9146524
ML14XC1-047-230	TXV	47500	15.5	12.5	CX35-60D	EL296UH135XE60D	9146525
ML14XC1-047-230	TXV	47500	15.5	12.5	CX35-60D	SL280UH135V60D	9146526
ML14XC1-047-230	TXV	48000	15.5	12.5	CX35-60D	SLP98UH135XV60D	10040423
ML14XC1-047-230	TXV	47000	14.5	12.2	CX35-60D		9146528
ML14XC1-047-230	TXV	47500	15.1	12.5	CX38-62C		10552471
ML14XC1-048-230	TXV	46000	14.5	12.2	C35-48B	EL180UH090E48B	9145115
ML14XC1-048-230	TXV	46000	14.5	12.2	C35-48B	EL180UH090XE48B	9145116
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL180UH090E60C	9145117
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL180UH110E60C	9145118
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL180UH110XE60C	9145119
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL195UH090XE48C	9145120
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL195UH110XE60C	9145121
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL296UH090XE48C	9145122
ML14XC1-048-230	TXV	46500	14.5	12.2	C35-48C	EL296UH090XV48C	9145123
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	EL296UH090XV60C	9145124
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL296UH110XE60C	9145125
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-48C	EL296UH110XV48C	9145126
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	EL296UH110XV60C	9145127
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	SL280UH090V60C	9145128
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	SL280UH090XV60C	9145129
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	SL280UH110V60C	9145130
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	SL280UH110XV60C	9145131
ML14XC1-048-230	TXV	46500	14.5	12.2	C35-48C	SLP98UH090XV48C	9145132
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	SLP98UH090XV60C	9145133
ML14XC1-048-230	TXV	46500	14.5	12.5	C35-48C	SLP98UH110XV60C	9145134
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	EL180UH090E60C	9145135
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	EL180UH110E60C	9145136
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	EL180UH110XE60C	9145137
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	EL195UH090XE48C	9145138
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	EL195UH110XE60C	9145139
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	EL296UH090XE48C	9145140
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	EL296UH090XV48C	9145141
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	EL296UH090XV60C	9145142
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	EL296UH110XE60C	9145143
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	EL296UH110XV48C	9145144
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	EL296UH110XV60C	9145145
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	SL280UH090V60C	9145146
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	SL280UH090XV60C	9145147
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	SL280UH110V60C	9145148

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-49C	SL280UH110XV60C	9145149
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	SLP98UH090XV48C	9145150
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	SLP98UH090XV60C	9145151
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-49C	SLP98UH110XV60C	9145152
ML14XC1-048-230	TXV	47000	14.25	12.2	C35-49C		9145153
ML14XC1-048-230	TXV	45500	14.5	12.5	C35-50/60C	EL180UH090E60C	9145154
ML14XC1-048-230	TXV	45500	14.5	12.5	C35-50/60C	EL180UH110E60C	9145155
ML14XC1-048-230	TXV	45500	14.5	12.5	C35-50/60C	EL180UH110XE60C	9145156
ML14XC1-048-230	TXV	45500	14.5	12.2	C35-50/60C	EL195UH090XE48C	9145157
ML14XC1-048-230	TXV	45500	14.5	12.2	C35-50/60C	EL195UH110XE60C	9145158
ML14XC1-048-230	TXV	45500	14.5	12.2	C35-50/60C	EL296UH090XE48C	9145159
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	EL296UH090XV48C	9145160
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	EL296UH090XV60C	9145161
ML14XC1-048-230	TXV	45500	14.5	12.2	C35-50/60C	EL296UH110XE60C	9145162
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	EL296UH110XV48C	9145163
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	EL296UH110XV60C	9145164
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-50/60C	SL280UH090V60C	9145165
ML14XC1-048-230	TXV	46000	14.5	12.5	C35-50/60C	SL280UH090XV60C	9145166
ML14XC1-048-230	TXV	46000	14.5	12.2	C35-50/60C	SL280UH110V60C	9145167
ML14XC1-048-230	TXV	46000	14.5	12.2	C35-50/60C	SL280UH110XV60C	9145168
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	SLP98UH090XV48C	9145169
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	SLP98UH090XV60C	9145170
ML14XC1-048-230	TXV	46000	14.25	12.2	C35-50/60C	SLP98UH110XV60C	9145171
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL180UH090E60C	9145172
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-60C	EL180UH110E60C	9145173
ML14XC1-048-230	TXV	47000	15.1	12.5	C35-60C	EL180UH110XE60C	9145174
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL195UH090XE48C	9145175
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL195UH110XE60C	9145176
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL296UH090XE48C	9145177
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL296UH090XV48C	9145178
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL296UH090XV60C	9145179
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL296UH110XE60C	9145180
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL296UH110XV48C	9145181
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	EL296UH110XV60C	9145182
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SL280UH090V60C	9145183
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SL280UH090XV60C	9145184
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SL280UH110V60C	9145185
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SL280UH110XV60C	9145186
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SLP98UH090XV48C	9145187
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SLP98UH090XV60C	9145188
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60C	SLP98UH110XV60C	9145189
ML14XC1-048-230	TXV	47000	14.25	12.2	C35-60C		9145190
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60D	EL180UH135E60D	9145191
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-60D	EL195UH135XE60D	9145192
ML14XC1-048-230	TXV	47000	14.5	12.5	C35-60D	EL296UH135XE60D	9145193
ML14XC1-048-230	TXV	47500	14.5	12.5	C35-60D	EL296UH135XV60D	9145194
ML14XC1-048-230	TXV	47500	15.1	12.5	C35-60D	SL280UH135V60D	9145195
ML14XC1-048-230	TXV	47500	14.5	12.5	C35-60D	SLP98UH135XV60D	9145196
ML14XC1-048-230	TXV	47000	14.25	12.2	C35-60D		9145197

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	47000	15	12.5	CBA27UHE-048		10259429
ML14XC1-048-230	TXV	46500	15.1	12.5	CBA27UHE-060		10259430
ML14XC1-048-230	TXV	46500	14.5	12.5	CBX25UH-048		9145198
ML14XC1-048-230	TXV	47000	14.5	12.5	CBX25UHV-048		9145199
ML14XC1-048-230	TXV	46000	14.5	12.5	CBX27UH-048		9145200
ML14XC1-048-230	TXV	47000	15.1	12.5	CBX27UH-060		9145201
ML14XC1-048-230	TXV	46000	14.5	12.2	CBX32M-048		9145202
ML14XC1-048-230	TXV	46500	14.25	12.2	CBX32M-060		9145203
ML14XC1-048-230	TXV	46000	14.5	12.2	CBX32MV-048		9145204
ML14XC1-048-230	TXV	47000	14.5	12.5	CBX32MV-060		9145205
ML14XC1-048-230	TXV	46000	14.5	12.2	CBX40UHV-048		9145206
ML14XC1-048-230	TXV	46500	14.5	12.2	CBX40UHV-060		9145207
ML14XC1-048-230	TXV	44500	14	12.2	CH23-51	EL180UH090E48B	9145208
ML14XC1-048-230	TXV	44000	14.25	12.2	CH23-51	EL180UH110E60C	9145209
ML14XC1-048-230	TXV	44000	14.25	12.2	CH23-51	EL180UH110XE60C	9145210
ML14XC1-048-230	TXV	45000	14.25	12.2	CH23-65	EL180UH090E48B	9145211
ML14XC1-048-230	TXV	45000	14.5	12.2	CH23-65	EL180UH090E60C	9145212
ML14XC1-048-230	TXV	45000	14.25	12.2	CH23-65	EL180UH090XE48B	9145213
ML14XC1-048-230	TXV	45000	14.5	12.5	CH23-65	EL180UH110E60C	9145214
ML14XC1-048-230	TXV	45000	14.5	12.5	CH23-65	EL180UH110XE60C	9145215
ML14XC1-048-230	TXV	47000	15.1	12.5	CH23-68	EL180UH135E60D	9145216
ML14XC1-048-230	TXV	47000	14.5	12.5	CH23-68	EL195UH135XE60D	9145217
ML14XC1-048-230	TXV	47000	14.5	12.5	CH23-68	EL296UH135XE60D	9145218
ML14XC1-048-230	TXV	46500	14	12	CH23-68		9145219
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43B	EL180UH090E48B	9145221
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43B	EL180UH090XE48B	9145220
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-43C	EL180UH090E60C	9145222
ML14XC1-048-230	TXV	45500	14.5	12.5	CH33-43C	EL180UH110E60C	9145223
ML14XC1-048-230	TXV	45500	14.5	12.5	CH33-43C	EL180UH110XE60C	9145224
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43C	EL195UH090XE48C	9145225
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-43C	EL195UH110XE60C	9145226
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43C	EL296UH090XE48C	9145227
ML14XC1-048-230	TXV	46000	14.25	12.2	CH33-43C	EL296UH090XV48C	9145228
ML14XC1-048-230	TXV	46000	14.25	12.2	CH33-43C	EL296UH090XV60C	9145229
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-43C	EL296UH110XE60C	9145230
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43C	EL296UH110XV48C	9145231
ML14XC1-048-230	TXV	46500	14.25	12.2	CH33-43C	EL296UH110XV60C	9145232
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-43C	SL280UH090V60C	9145233
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-43C	SL280UH090XV60C	9145234
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43C	SL280UH110V60C	9145235
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-43C	SL280UH110XV60C	9145236
ML14XC1-048-230	TXV	46000	14.25	12.2	CH33-43C	SLP98UH090XV48C	9145237
ML14XC1-048-230	TXV	46000	14.25	12.2	CH33-43C	SLP98UH090XV60C	9145238
ML14XC1-048-230	TXV	46500	14.25	12.2	CH33-43C	SLP98UH110XV60C	9145239
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-44/48B	EL180UH090E48B	9145240
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-44/48B	EL180UH090XE48B	9145241
ML14XC1-048-230	TXV	45500	14.5	12.5	CH33-48C	EL180UH090E60C	9145242
ML14XC1-048-230	TXV	45500	14.5	12.5	CH33-48C	EL180UH110E60C	9145243
ML14XC1-048-230	TXV	45500	14.5	12.5	CH33-48C	EL180UH110XE60C	9145244

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-48C	EL195UH090XE48C	9145245
ML14XC1-048-230	TXV	45500	14.5	12.2	CH33-48C	EL195UH110XE60C	9145246
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-48C	EL296UH090XE48C	9145247
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-48C	EL296UH090XV48C	9145248
ML14XC1-048-230	TXV	45500	14.25	12	CH33-48C	EL296UH090XV60C	9145249
ML14XC1-048-230	TXV	45500	14.5	12.2	CH33-48C	EL296UH110XE60C	9145250
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-48C	EL296UH110XV48C	9145251
ML14XC1-048-230	TXV	46000	14.25	12.2	CH33-48C	EL296UH110XV60C	9145252
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-48C	SL280UH090V60C	9145253
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-48C	SL280UH090XV60C	9145254
ML14XC1-048-230	TXV	45500	14.5	12.2	CH33-48C	SL280UH110V60C	9145255
ML14XC1-048-230	TXV	45500	14.5	12.2	CH33-48C	SL280UH110XV60C	9145256
ML14XC1-048-230	TXV	45500	14.25	12.2	CH33-48C	SLP98UH090XV48C	9145257
ML14XC1-048-230	TXV	45500	14.25	12	CH33-48C	SLP98UH090XV60C	9145258
ML14XC1-048-230	TXV	46000	14.25	12.2	CH33-48C	SLP98UH110XV60C	9145259
ML14XC1-048-230	TXV	46500	15.1	12.5	CH33-49	EL180UH090E60C	9145261
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-49	EL180UH110E60C	9145262
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-49	EL180UH110XE60C	9145263
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	EL195UH090XE48C	9145264
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	EL195UH110XE60C	9145265
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	EL296UH090XE48C	9145266
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-49	EL296UH090XV48C	9145267
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-49	EL296UH090XV60C	9145268
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	EL296UH110XE60C	9145269
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	EL296UH110XV48C	9145270
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-49	EL296UH110XV60C	9145271
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-49	SL280UH090V60C	9145272
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-49	SL280UH090XV60C	9145273
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	SL280UH110V60C	9145274
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-49	SL280UH110XV60C	9145275
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-49	SLP98UH090XV48C	9145276
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-49	SLP98UH090XV60C	9145277
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-49	SLP98UH110XV60C	9145278
ML14XC1-048-230	TXV	46500	14	12	CH33-49		9145260
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL180UH090E60C	9145279
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL180UH110E60C	9145280
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL180UH110XE60C	9145281
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL195UH090XE48C	9145282
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL195UH110XE60C	9145283
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL296UH090XE48C	9145284
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-50/60C	EL296UH090XV48C	9145285
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-50/60C	EL296UH090XV60C	9145286
ML14XC1-048-230	TXV	46000	14.5	12.5	CH33-50/60C	EL296UH110XE60C	9145287
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-50/60C	EL296UH110XV48C	9145288
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-50/60C	EL296UH110XV60C	9145289
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-50/60C	SL280UH090V60C	9145290
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-50/60C	SL280UH090XV60C	9145291
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-50/60C	SL280UH110V60C	9145292
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-50/60C	SL280UH110XV60C	9145293

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-50/60C	SLP98UH090XV48C	9145294
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-50/60C	SLP98UH090XV60C	9145295
ML14XC1-048-230	TXV	46500	14.5	12.2	CH33-50/60C	SLP98UH110XV60C	9145296
ML14XC1-048-230	TXV	46000	14	12	CH33-50/60C		9145297
ML14XC1-048-230	TXV	46500	15	12.5	CH33-60D	EL180UH135E60D	9145298
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-60D	EL195UH135XE60D	9145299
ML14XC1-048-230	TXV	46000	14.5	12.2	CH33-60D	EL296UH135XE60D	9145300
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-60D	EL296UH135XV60D	9145301
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-60D	SL280UH135V60D	9145302
ML14XC1-048-230	TXV	46500	14.5	12.5	CH33-60D	SLP98UH135XV60D	9145303
ML14XC1-048-230	TXV	47000	15.1	12.5	CH33-62D	EL180UH135E60D	9145304
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-62D	EL195UH135XE60D	9145305
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-62D	EL296UH135XE60D	9145306
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-62D	EL296UH135XV60D	9145307
ML14XC1-048-230	TXV	47000	15	12.5	CH33-62D	SL280UH135V60D	9145308
ML14XC1-048-230	TXV	47000	14.5	12.5	CH33-62D	SLP98UH135XV60D	9145309
ML14XC1-048-230	TXV	46500	14	12.5	CH33-62D		9145310
ML14XC1-048-230	TXV	47500	14.5	12.5	CH35-42B	EL180UH090E48B	9145311
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-42B	EL180UH090XE48B	9145312
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-42C	EL180UH090E60C	9145313
ML14XC1-048-230	TXV	45500	14.5	12.5	CH35-42C	EL180UH110E60C	9145314
ML14XC1-048-230	TXV	45500	14.5	12.5	CH35-42C	EL180UH110XE60C	9145315
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-42C	EL195UH090XE48C	9145316
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-42C	EL195UH110XE60C	9145317
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-42C	EL296UH090XE48C	9145318
ML14XC1-048-230	TXV	46500	14.25	12.2	CH35-42C	EL296UH090XV48C	9145319
ML14XC1-048-230	TXV	46500	14.25	12.2	CH35-42C	EL296UH090XV60C	9145320
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-42C	EL296UH110XE60C	9145321
ML14XC1-048-230	TXV	46500	14.5	12.2	CH35-42C	EL296UH110XV48C	9145322
ML14XC1-048-230	TXV	46500	14.5	12.2	CH35-42C	EL296UH110XV60C	9145323
ML14XC1-048-230	TXV	46500	14.5	12.5	CH35-42C	SL280UH090V60C	9145324
ML14XC1-048-230	TXV	46500	14.5	12.5	CH35-42C	SL280UH090XV60C	9145325
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-42C	SL280UH110V60C	9145326
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-42C	SL280UH110XV60C	9145327
ML14XC1-048-230	TXV	46500	14.25	12.2	CH35-42C	SLP98UH090XV48C	9145328
ML14XC1-048-230	TXV	46500	14.25	12.2	CH35-42C	SLP98UH090XV60C	9145329
ML14XC1-048-230	TXV	46500	14.5	12.2	CH35-42C	SLP98UH110XV60C	9145330
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48B	EL180UH090E48B	9145331
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48B	EL180UH090XE48B	9145332
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-48C	EL180UH090E60C	9145333
ML14XC1-048-230	TXV	45500	14.5	12.5	CH35-48C	EL180UH110E60C	9145334
ML14XC1-048-230	TXV	45500	14.5	12.5	CH35-48C	EL180UH110XE60C	9145335
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-48C	EL195UH090XE48C	9145336
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-48C	EL195UH110XE60C	9145337
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-48C	EL296UH090XE48C	9145338
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48C	EL296UH090XV48C	9145339
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48C	EL296UH090XV60C	9145340
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-48C	EL296UH110XE60C	9145341
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-48C	EL296UH110XV48C	9145342

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48C	EL296UH110XV60C	9145343
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-48C	SL280UH090V60C	9145344
ML14XC1-048-230	TXV	46000	14.5	12.5	CH35-48C	SL280UH090XV60C	9145345
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-48C	SL280UH110V60C	9145346
ML14XC1-048-230	TXV	46000	14.5	12.2	CH35-48C	SL280UH110XV60C	9145347
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48C	SLP98UH090XV48C	9145348
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48C	SLP98UH090XV60C	9145349
ML14XC1-048-230	TXV	46000	14.25	12.2	CH35-48C	SLP98UH110XV60C	9145350
ML14XC1-048-230	TXV	46500	15.1	12.5	CH35-51C	EL180UH090E60C	9145351
ML14XC1-048-230	TXV	46500	15.1	12.5	CH35-51C	EL180UH110E60C	9145352
ML14XC1-048-230	TXV	46500	15.1	12.5	CH35-51C	EL180UH110XE60C	9145353
ML14XC1-048-230	TXV	46500	14.5	12.5	CH35-51C	EL195UH090XE48C	9145354
ML14XC1-048-230	TXV	46500	14.5	12.5	CH35-51C	EL195UH110XE60C	9145355
ML14XC1-048-230	TXV	46500	14.5	12.5	CH35-51C	EL296UH090XE48C	9145356
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	EL296UH090XV48C	9145357
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	EL296UH090XV60C	9145358
ML14XC1-048-230	TXV	46500	14.5	12.5	CH35-51C	EL296UH110XE60C	9145359
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	EL296UH110XV48C	9145360
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	EL296UH110XV60C	9145361
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SL280UH090V60C	9145362
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SL280UH090XV60C	9145363
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SL280UH110V60C	9145364
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SL280UH110XV60C	9145365
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SLP98UH090XV48C	9145366
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SLP98UH090XV60C	9145367
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-51C	SLP98UH110XV60C	9145368
ML14XC1-048-230	TXV	46500	14.25	12	CH35-51C		9145369
ML14XC1-048-230	TXV	47000	15.1	12.5	CH35-60D	EL180UH135E60D	9145370
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-60D	EL195UH135XE60D	9145371
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-60D	EL296UH135XE60D	9145372
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-60D	EL296UH135XV60D	9145373
ML14XC1-048-230	TXV	47000	15	12.5	CH35-60D	SL280UH135V60D	9145374
ML14XC1-048-230	TXV	47000	14.5	12.5	CH35-60D	SLP98UH135XV60D	9145375
ML14XC1-048-230	TXV	46500	14	12	CH35-60D		9145376
ML14XC1-048-230	TXV	45000	14.5	12.5	CR33-48	EL180DF110E60C	9145377
ML14XC1-048-230	TXV	44500	14.25	12.2	CR33-48	EL195DF110XE60C	9145378
ML14XC1-048-230	TXV	44500	14.25	12.2	CR33-48	EL296DF110XE60C	9145379
ML14XC1-048-230	TXV	45000	14.25	12.2	CR33-48	SL280DF090V60C	9145380
ML14XC1-048-230	TXV	45000	14.25	12.2	CR33-48	SL280DF110V60C	9145381
ML14XC1-048-230	TXV	45500	14.5	12.5	CR33-50/60	EL180DF110E60C	9145382
ML14XC1-048-230	TXV	45500	14.5	12.5	CR33-50/60	EL195DF110XE60C	9145383
ML14XC1-048-230	TXV	45000	14	12	CR33-50/60	EL296DF090XV60C	9145384
ML14XC1-048-230	TXV	45500	14.5	12.5	CR33-50/60	EL296DF110XE60C	9145385
ML14XC1-048-230	TXV	45000	14.25	12	CR33-50/60	EL296DF110XV60C	9145386
ML14XC1-048-230	TXV	45500	14.5	12.5	CR33-50/60	SL280DF090V60C	9145387
ML14XC1-048-230	TXV	45500	14.5	12.5	CR33-50/60	SL280DF110V60C	9145388
ML14XC1-048-230	TXV	45000	14	12	CR33-50/60	SLP98DF090XV48C	9145389
ML14XC1-048-230	TXV	45000	14	12	CR33-50/60	SLP98DF090XV60C	9145390
ML14XC1-048-230	TXV	45000	14.25	12	CR33-50/60	SLP98DF110XV60C	9145391

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	46000	14.5	12.2	CX35-48B	EL180UH090E48B	9145498
ML14XC1-048-230	TXV	46000	14.5	12.2	CX35-48B	EL180UH090XE48B	9145499
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL180UH090E60C	9145500
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL180UH110E60C	9145501
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL180UH110XE60C	9145502
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL195UH090XE48C	9145503
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL195UH110XE60C	9145504
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL296UH090XE48C	9145505
ML14XC1-048-230	TXV	46500	14.5	12.2	CX35-48C	EL296UH090XV48C	9145506
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	EL296UH090XV60C	9145507
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL296UH110XE60C	9145508
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-48C	EL296UH110XV48C	9145509
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	EL296UH110XV60C	9145510
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	SL280UH090V60C	9145511
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	SL280UH090XV60C	9145512
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	SL280UH110V60C	9145513
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	SL280UH110XV60C	9145514
ML14XC1-048-230	TXV	46500	14.5	12.2	CX35-48C	SLP98UH090XV48C	9145515
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	SLP98UH090XV60C	9145516
ML14XC1-048-230	TXV	46500	14.5	12.5	CX35-48C	SLP98UH110XV60C	9145517
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	EL180UH090E60C	9145518
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	EL180UH110E60C	9145519
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	EL180UH110XE60C	9145520
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	EL195UH090XE48C	9145521
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	EL195UH110XE60C	9145522
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	EL296UH090XE48C	9145523
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	EL296UH090XV48C	9145524
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	EL296UH090XV60C	9145525
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	EL296UH110XE60C	9145526
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	EL296UH110XV48C	9145527
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	EL296UH110XV60C	9145528
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	SL280UH090V60C	9145529
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	SL280UH090XV60C	9145530
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	SL280UH110V60C	9145531
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-49C	SL280UH110XV60C	9145532
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	SLP98UH090XV48C	9145533
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	SLP98UH090XV60C	9145534
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-49C	SLP98UH110XV60C	9145535
ML14XC1-048-230	TXV	47000	14.25	12.2	CX35-49C		9145536
ML14XC1-048-230	TXV	45500	14.5	12.5	CX35-50/60C	EL180UH090E60C	9145537
ML14XC1-048-230	TXV	45500	14.5	12.5	CX35-50/60C	EL180UH110E60C	9145538
ML14XC1-048-230	TXV	45500	14.5	12.2	CX35-50/60C	EL180UH110XE60C	9145539
ML14XC1-048-230	TXV	45500	14.5	12.2	CX35-50/60C	EL195UH090XE48C	9145540
ML14XC1-048-230	TXV	45500	14.5	12.2	CX35-50/60C	EL195UH110XE60C	9145541
ML14XC1-048-230	TXV	45500	14.5	12.2	CX35-50/60C	EL296UH090XE48C	9145542
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	EL296UH090XV48C	9145543
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	EL296UH090XV60C	9145544
ML14XC1-048-230	TXV	45500	14.5	12.2	CX35-50/60C	EL296UH110XE60C	9145545
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	EL296UH110XV48C	9145546

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	EL296UH110XV60C	9145547
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-50/60C	SL280UH090V60C	9145548
ML14XC1-048-230	TXV	46000	14.5	12.5	CX35-50/60C	SL280UH090XV60C	9145549
ML14XC1-048-230	TXV	46000	14.5	12.2	CX35-50/60C	SL280UH110V60C	9145550
ML14XC1-048-230	TXV	46000	14.5	12.2	CX35-50/60C	SL280UH110XV60C	9145551
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	SLP98UH090XV48C	9145552
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	SLP98UH090XV60C	9145553
ML14XC1-048-230	TXV	46000	14.25	12.2	CX35-50/60C	SLP98UH110XV60C	9145554
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL180UH090E60C	9145555
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-60C	EL180UH110E60C	9145556
ML14XC1-048-230	TXV	47000	15.1	12.5	CX35-60C	EL180UH110XE60C	9145557
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL195UH090XE48C	9145558
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL195UH110XE60C	9145559
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL296UH090XE48C	9145560
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL296UH090XV48C	9145561
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL296UH090XV60C	9145562
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL296UH110XE60C	9145563
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL296UH110XV48C	9145564
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	EL296UH110XV60C	9145565
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SL280UH090V60C	9145566
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SL280UH090XV60C	9145567
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SL280UH110V60C	9145568
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SL280UH110XV60C	9145569
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SLP98UH090XV48C	9145570
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SLP98UH090XV60C	9145571
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60C	SLP98UH110XV60C	9145572
ML14XC1-048-230	TXV	47000	14.25	12.2	CX35-60C		9145573
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60D	EL180UH135E60D	9145574
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-60D	EL195UH135XE60D	9145575
ML14XC1-048-230	TXV	47000	14.5	12.5	CX35-60D	EL296UH135XE60D	9145576
ML14XC1-048-230	TXV	47500	14.5	12.5	CX35-60D	EL296UH135XV60D	9145577
ML14XC1-048-230	TXV	47500	15.1	12.5	CX35-60D	SL280UH135V60D	9145578
ML14XC1-048-230	TXV	47500	14.5	12.5	CX35-60D	SLP98UH135XV60D	9145579
ML14XC1-048-230	TXV	47000	14.25	12.2	CX35-60D		9145580
ML14XC1-048-230	TXV	47000	14.25	12.2	CX38-62C		10552683
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	EL180UH090E60C	9145635
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	EL180UH110E60C	9145636
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	EL180UH110XE60C	9145637
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	EL195UH110XE60C	9145638
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	EL296UH110XE60C	9145640
ML14XC1-059-230	TXV	56000	14.5	12.2	C35-48C	EL296UH110XV60C	9145639
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	SL280UH090V60C	9145641
ML14XC1-059-230	TXV	56000	14.5	12.5	C35-48C	SL280UH090XV60C	9145642
ML14XC1-059-230	TXV	55500	14.5	12.2	C35-48C	SL280UH110V60C	9145643
ML14XC1-059-230	TXV	55500	14.5	12.2	C35-48C	SL280UH110XV60C	9145644
ML14XC1-059-230	TXV	55500	14.5	12.2	C35-48C	SLP98UH090XV60C	9145645
ML14XC1-059-230	TXV	56000	14.5	12.2	C35-48C	SLP98UH110XV60C	9145646
ML14XC1-059-230	TXV	56000	14.25	12	C35-48C		9145634
ML14XC1-059-230	TXV	57000	15.1	12.5	C35-49C	EL180UH090E60C	9145648

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-059-230	TXV	56500	15.1	12.5	C35-49C	EL180UH110E60C	9145649
ML14XC1-059-230	TXV	56500	15.1	12.5	C35-49C	EL180UH110XE60C	9145650
ML14XC1-059-230	TXV	56500	14.5	12.5	C35-49C	EL195UH110XE60C	9145651
ML14XC1-059-230	TXV	56500	14.5	12.5	C35-49C	EL296UH110XE60C	9145653
ML14XC1-059-230	TXV	57000	14.5	12.5	C35-49C	EL296UH110XV60C	9145652
ML14XC1-059-230	TXV	57000	15.1	12.5	C35-49C	SL280UH090V60C	9145654
ML14XC1-059-230	TXV	57000	15.1	12.5	C35-49C	SL280UH090XV60C	9145655
ML14XC1-059-230	TXV	56500	15.1	12.5	C35-49C	SL280UH110V60C	9145656
ML14XC1-059-230	TXV	56500	15.1	12.5	C35-49C	SL280UH110XV60C	9145657
ML14XC1-059-230	TXV	56000	14.5	12.2	C35-49C	SLP98UH090XV60C	9145658
ML14XC1-059-230	TXV	57000	14.5	12.5	C35-49C	SLP98UH110XV60C	9145659
ML14XC1-059-230	TXV	57000	14.5	12.2	C35-49C		9145647
ML14XC1-059-230	TXV	55000	14.5	12.2	C35-50/60C	EL180UH090E60C	9145661
ML14XC1-059-230	TXV	55000	14.5	12.2	C35-50/60C	EL180UH110E60C	9145662
ML14XC1-059-230	TXV	55000	14.5	12.2	C35-50/60C	EL180UH110XE60C	9145663
ML14XC1-059-230	TXV	55000	14.5	12.2	C35-50/60C	EL195UH110XE60C	9145664
ML14XC1-059-230	TXV	55000	14.5	12.2	C35-50/60C	EL296UH110XE60C	9145665
ML14XC1-059-230	TXV	55500	14.5	12.2	C35-50/60C	SL280UH090V60C	9145666
ML14XC1-059-230	TXV	55500	14.5	12.2	C35-50/60C	SL280UH090XV60C	9145667
ML14XC1-059-230	TXV	55000	14.25	12	C35-50/60C	SL280UH110V60C	9145668
ML14XC1-059-230	TXV	55000	14.25	12	C35-50/60C	SL280UH110XV60C	9145669
ML14XC1-059-230	TXV	55500	14.25	12	C35-50/60C	SLP98UH090XV60C	9145671
ML14XC1-059-230	TXV	54500	14.25	12	C35-50/60C	SLP98UH110XV60C	9145670
ML14XC1-059-230	TXV	55500	14.25	12	C35-50/60C		9145660
ML14XC1-059-230	TXV	57500	15.5	12.5	C35-60C	EL180UH090E60C	9145673
ML14XC1-059-230	TXV	57500	15.5	12.5	C35-60C	EL180UH110E60C	9145674
ML14XC1-059-230	TXV	57500	15.5	12.5	C35-60C	EL180UH110XE60C	9145675
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60C	EL195UH110XE60C	9145676
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60C	EL296UH110XE60C	9145678
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60C	EL296UH110XV60C	9145677
ML14XC1-059-230	TXV	58000	15.1	12.5	C35-60C	SL280UH090V60C	9145679
ML14XC1-059-230	TXV	58000	15.1	12.5	C35-60C	SL280UH090XV60C	9145680
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60C	SL280UH110V60C	9145681
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60C	SL280UH110XV60C	9145682
ML14XC1-059-230	TXV	57000	15.1	12.5	C35-60C	SLP98UH090XV60C	9145683
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60C	SLP98UH110XV60C	9145684
ML14XC1-059-230	TXV	58000	14.5	12.5	C35-60C		9145672
ML14XC1-059-230	TXV	57500	15.5	12.5	C35-60D	EL180UH135E60D	9145686
ML14XC1-059-230	TXV	57500	14.5	12.5	C35-60D	EL195UH135XE60D	9145687
ML14XC1-059-230	TXV	57500	14.5	12.5	C35-60D	EL296UH135XE60D	9145689
ML14XC1-059-230	TXV	57500	15.1	12.5	C35-60D	EL296UH135XV60D	9145688
ML14XC1-059-230	TXV	57000	15.5	12.5	C35-60D	SL280UH135V60D	9145690
ML14XC1-059-230	TXV	56500	15.1	12.5	C35-60D	SLP98UH135XV60D	9145691
ML14XC1-059-230	TXV	57000	14.5	12.2	C35-60D		9145685
ML14XC1-059-230	TXV	56000	15.1	12.5	CBA27UHE-060		10259431
ML14XC1-059-230	TXV	57000	14.5	12.5	CBX25UH-060		9145692
ML14XC1-059-230	TXV	57000	15.1	12.5	CBX25UHV-060		9145693
ML14XC1-059-230	TXV	56500	15.1	12.5	CBX27UH-060		9145694
ML14XC1-059-230	TXV	56500	14.5	12.2	CBX32M-060		9145695

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-059-230	TXV	55500	14.5	12.2	CBX32MV-048		9145696
ML14XC1-059-230	TXV	56500	14.5	12.5	CBX32MV-060		9145697
ML14XC1-059-230	TXV	56500	15.1	12.5	CBX32MV-068		9145698
ML14XC1-059-230	TXV	55500	14.5	12.5	CBX40UHV-048		9145699
ML14XC1-059-230	TXV	56000	15.1	12.5	CBX40UHV-060		9145700
ML14XC1-059-230	TXV	57500	15.1	12.5	CH23-68	EL180UH135E60D	9145702
ML14XC1-059-230	TXV	57500	14.5	12.5	CH23-68	EL195UH135XE60D	9145703
ML14XC1-059-230	TXV	57500	14.5	12.5	CH23-68	EL296UH135XE60D	9145704
ML14XC1-059-230	TXV	57000	14.5	12.2	CH23-68		9145701
ML14XC1-059-230	TXV	56500	15.1	12.5	CH33-49	EL180UH090E60C	9145705
ML14XC1-059-230	TXV	56500	15.1	12.5	CH33-49	EL180UH110E60C	9145706
ML14XC1-059-230	TXV	56500	15.1	12.5	CH33-49	EL180UH110XE60C	9145707
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-49	EL195UH110XE60C	9145708
ML14XC1-059-230	TXV	56500	15.1	12.5	CH33-49	EL296UH110XE60C	9145709
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-49	SL280UH090V60C	9145710
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-49	SL280UH090XV60C	9145711
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-49	SL280UH110V60C	9145712
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-49	SL280UH110XV60C	9145713
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-49	SLP98UH090XV60C	9145714
ML14XC1-059-230	TXV	56500	14.5	12.2	CH33-49	SLP98UH110XV60C	9145715
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	EL180UH090E60C	9145716
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	EL180UH110E60C	9145717
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	EL180UH110XE60C	9145718
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	EL195UH110XE60C	9145719
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	EL296UH110XE60C	9145720
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-50/60C	SL280UH090V60C	9145721
ML14XC1-059-230	TXV	56500	14.5	12.5	CH33-50/60C	SL280UH090XV60C	9145722
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	SL280UH110V60C	9145723
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-50/60C	SL280UH110XV60C	9145724
ML14XC1-059-230	TXV	56000	14.5	12.5	CH33-60D	EL180UH135E60D	9145726
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-60D	EL195UH135XE60D	9145727
ML14XC1-059-230	TXV	56000	14.5	12.2	CH33-60D	EL296UH135XE60D	9145729
ML14XC1-059-230	TXV	55500	14.5	12.2	CH33-60D	EL296UH135XV60D	9145728
ML14XC1-059-230	TXV	56000	15.1	12.5	CH33-60D	SL280UH135V60D	9145730
ML14XC1-059-230	TXV	55500	14.5	12.2	CH33-60D	SLP98UH135XV60D	9145731
ML14XC1-059-230	TXV	56000	14.25	12	CH33-60D		9145725
ML14XC1-059-230	TXV	57000	15.1	12.5	CH33-62D	EL180UH135E60D	9145733
ML14XC1-059-230	TXV	57000	14.5	12.2	CH33-62D	EL195UH135XE60D	9145734
ML14XC1-059-230	TXV	57000	14.5	12.2	CH33-62D	EL296UH135XE60D	9145736
ML14XC1-059-230	TXV	56000	15.1	12.5	CH33-62D	EL296UH135XV60D	9145735
ML14XC1-059-230	TXV	56500	15.5	12.5	CH33-62D	SL280UH135V60D	9145737
ML14XC1-059-230	TXV	57000	15.1	12.5	CH33-62D	SLP98UH135XV60D	9145738
ML14XC1-059-230	TXV	56500	14.5	12.2	CH33-62D		9145732
ML14XC1-059-230	TXV	57000	15.1	12.5	CH35-51C	EL180UH090E60C	9145740
ML14XC1-059-230	TXV	56500	15.1	12.5	CH35-51C	EL180UH110E60C	9145741
ML14XC1-059-230	TXV	56500	15.1	12.5	CH35-51C	EL180UH110XE60C	9145742
ML14XC1-059-230	TXV	56500	14.5	12.5	CH35-51C	EL195UH110XE60C	9145743
ML14XC1-059-230	TXV	56500	14.5	12.5	CH35-51C	EL296UH110XE60C	9145744
ML14XC1-059-230	TXV	56500	15.1	12.5	CH35-51C	SL280UH090V60C	9145745

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-059-230	TXV	56500	15.1	12.5	CH35-51C	SL280UH090XV60C	9145746
ML14XC1-059-230	TXV	56500	14.5	12.5	CH35-51C	SL280UH110V60C	9145747
ML14XC1-059-230	TXV	56500	14.5	12.5	CH35-51C	SL280UH110XV60C	9145748
ML14XC1-059-230	TXV	56500	14.5	12.2	CH35-51C	SLP98UH090XV60C	9145750
ML14XC1-059-230	TXV	56000	14.5	12.2	CH35-51C	SLP98UH110XV60C	9145749
ML14XC1-059-230	TXV	57000	14.5	12.2	CH35-51C		9145739
ML14XC1-059-230	TXV	57000	15.1	12.5	CH35-60D	EL180UH135E60D	9145752
ML14XC1-059-230	TXV	57000	14.5	12.2	CH35-60D	EL195UH135XE60D	9145753
ML14XC1-059-230	TXV	57000	14.5	12.2	CH35-60D	EL296UH135XE60D	9145755
ML14XC1-059-230	TXV	57000	15.1	12.5	CH35-60D	EL296UH135XV60D	9145754
ML14XC1-059-230	TXV	56500	15.5	12.5	CH35-60D	SL280UH135V60D	9145756
ML14XC1-059-230	TXV	57000	15.1	12.5	CH35-60D	SLP98UH135XV60D	9145757
ML14XC1-059-230	TXV	56500	14.5	12.2	CH35-60D		9145751
ML14XC1-059-230	TXV	55500	14.5	12.2	CR33-50/60	EL180DF110E60C	9145759
ML14XC1-059-230	TXV	55000	14.5	12.2	CR33-50/60	EL195DF110XE60C	9145760
ML14XC1-059-230	TXV	54500	14.25	12	CR33-50/60	EL296DF090XV60C	9145761
ML14XC1-059-230	TXV	55000	14.5	12.2	CR33-50/60	EL296DF110XE60C	9145763
ML14XC1-059-230	TXV	54500	14.25	12	CR33-50/60	EL296DF110XV60C	9145762
ML14XC1-059-230	TXV	55000	14.5	12.2	CR33-50/60	SL280DF090V60C	9145764
ML14XC1-059-230	TXV	55500	14.5	12.2	CR33-50/60	SL280DF110V60C	9145765
ML14XC1-059-230	TXV	54500	14.25	12	CR33-50/60	SLP98DF090XV60C	9145766
ML14XC1-059-230	TXV	54500	14.25	12	CR33-50/60	SLP98DF110XV60C	9145767
ML14XC1-059-230	TXV	55000	14	11.7	CR33-50/60		9145758
ML14XC1-059-230	TXV	55000	14	11.7	CR33-60		9145768
ML14XC1-059-230	TXV	56000	14.5	12.5	CX35-48C	EL180UH090E60C	9145822
ML14XC1-059-230	TXV	56000	14.5	12.5	CX35-48C	EL180UH110E60C	9145823
ML14XC1-059-230	TXV	56000	14.5	12.5	CX35-48C	EL180UH110XE60C	9145824
ML14XC1-059-230	TXV	56000	14.5	12.5	CX35-48C	EL195UH110XE60C	9145825
ML14XC1-059-230	TXV	56000	14.5	12.5	CX35-48C	EL296UH110XE60C	9145827
ML14XC1-059-230	TXV	55500	14.25	12	CX35-48C	EL296UH110XV60C	9145826
ML14XC1-059-230	TXV	55500	14.5	12.2	CX35-48C	SL280UH090V60C	9145828
ML14XC1-059-230	TXV	55500	14.5	12.2	CX35-48C	SL280UH090XV60C	9145829
ML14XC1-059-230	TXV	55500	14.5	12.2	CX35-48C	SL280UH110V60C	9145830
ML14XC1-059-230	TXV	55500	14.5	12.2	CX35-48C	SL280UH110XV60C	9145831
ML14XC1-059-230	TXV	55000	14.5	12	CX35-48C	SLP98UH090XV60C	9145832
ML14XC1-059-230	TXV	55500	14.25	12	CX35-48C	SLP98UH110XV60C	9145833
ML14XC1-059-230	TXV	56000	14.25	12	CX35-48C		9145821
ML14XC1-059-230	TXV	57000	15.1	12.5	CX35-49C	EL180UH090E60C	9145835
ML14XC1-059-230	TXV	56500	15.1	12.5	CX35-49C	EL180UH110E60C	9145836
ML14XC1-059-230	TXV	56500	15.1	12.5	CX35-49C	EL180UH110XE60C	9145837
ML14XC1-059-230	TXV	56500	14.5	12.5	CX35-49C	EL195UH110XE60C	9145838
ML14XC1-059-230	TXV	56500	14.5	12.5	CX35-49C	EL296UH110XE60C	9145840
ML14XC1-059-230	TXV	57000	14.5	12.5	CX35-49C	EL296UH110XV60C	9145839
ML14XC1-059-230	TXV	57000	15.1	12.5	CX35-49C	SL280UH090V60C	9145841
ML14XC1-059-230	TXV	57000	15.1	12.5	CX35-49C	SL280UH090XV60C	9145842
ML14XC1-059-230	TXV	56500	15.1	12.5	CX35-49C	SL280UH110V60C	9145843
ML14XC1-059-230	TXV	56500	15.1	12.5	CX35-49C	SL280UH110XV60C	9145844
ML14XC1-059-230	TXV	56000	14.5	12.2	CX35-49C	SLP98UH090XV60C	9145845
ML14XC1-059-230	TXV	57000	14.5	12.5	CX35-49C	SLP98UH110XV60C	9145846

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-059-230	TXV	57000	14.5	12.2	CX35-49C		9145834
ML14XC1-059-230	TXV	55000	14.5	12.2	CX35-50/60C	EL180UH090E60C	9145848
ML14XC1-059-230	TXV	55000	14.5	12.2	CX35-50/60C	EL180UH110E60C	9145849
ML14XC1-059-230	TXV	55000	14.5	12.2	CX35-50/60C	EL180UH110XE60C	9145850
ML14XC1-059-230	TXV	55000	14.5	12.2	CX35-50/60C	EL195UH110XE60C	9145851
ML14XC1-059-230	TXV	55000	14.5	12.2	CX35-50/60C	EL296UH110XV60C	9145852
ML14XC1-059-230	TXV	55500	14.5	12.2	CX35-50/60C	SL280UH090V60C	9145853
ML14XC1-059-230	TXV	55500	14.5	12.2	CX35-50/60C	SL280UH090XV60C	9145854
ML14XC1-059-230	TXV	55000	14.25	12	CX35-50/60C	SL280UH110V60C	9145855
ML14XC1-059-230	TXV	55000	14.25	12	CX35-50/60C	SL280UH110XV60C	9145856
ML14XC1-059-230	TXV	54500	14.25	12	CX35-50/60C	SLP98UH090XV60C	9145857
ML14XC1-059-230	TXV	55500	14.25	12	CX35-50/60C	SLP98UH110XV60C	9145858
ML14XC1-059-230	TXV	55500	14.25	12	CX35-50/60C		9145847
ML14XC1-059-230	TXV	57500	15.5	12.5	CX35-60C	EL180UH090E60C	9145860
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60C	EL180UH110E60C	9145861
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60C	EL180UH110XE60C	9145862
ML14XC1-059-230	TXV	57500	15.5	12.5	CX35-60C	EL195UH110XE60C	9145863
ML14XC1-059-230	TXV	57500	15.5	12.5	CX35-60C	EL296UH110XE60C	9145865
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60C	EL296UH110XV60C	9145864
ML14XC1-059-230	TXV	58000	15.1	12.5	CX35-60C	SL280UH090V60C	9145866
ML14XC1-059-230	TXV	58000	15.1	12.5	CX35-60C	SL280UH090XV60C	9145867
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60C	SL280UH110V60C	9145868
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60C	SL280UH110XV60C	9145869
ML14XC1-059-230	TXV	57000	15.1	12.5	CX35-60C	SLP98UH090XV60C	9145870
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60C	SLP98UH110XV60C	9145871
ML14XC1-059-230	TXV	56500	15.1	12.5	CX35-60C	SLP98UH135XV60D	9145878
ML14XC1-059-230	TXV	58000	14.5	12.5	CX35-60C		9145859
ML14XC1-059-230	TXV	57500	15.5	12.5	CX35-60D	EL180UH135E60D	9145873
ML14XC1-059-230	TXV	57500	14.5	12.5	CX35-60D	EL195UH135XE60D	9145874
ML14XC1-059-230	TXV	57500	14.5	12.5	CX35-60D	EL296UH135XE60D	9145876
ML14XC1-059-230	TXV	57500	15.1	12.5	CX35-60D	EL296UH135XV60D	9145875
ML14XC1-059-230	TXV	57000	15.5	12.5	CX35-60D	SL280UH135V60D	9145877
ML14XC1-059-230	TXV	57000	14.5	12.2	CX35-60D		9145872
ML14XC1-059-230	TXV	57500	14.5	12.2	CX38-62C		10552786
ML14XC1-060-230	RFC	59500	14	12.2	CH33-49		9145999
ML14XC1-060-230	RFC	59000	14	12	CH33-62D		9146013
ML14XC1-060-230	RFC	59000	14	12	CH35-60D		9146029
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-49C	EL180UH090E60C	9145931
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-49C	EL180UH110E60C	9145932
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-49C	EL180UH110XE60C	9145933
ML14XC1-060-230	TXV	58500	14.25	12.2	C35-49C	EL195UH110XE60C	9145934
ML14XC1-060-230	TXV	58000	14.25	12	C35-49C	EL296UH090XV60C	9145935
ML14XC1-060-230	TXV	58500	14.25	12.2	C35-49C	EL296UH110XE60C	9145936
ML14XC1-060-230	TXV	58000	14.25	12.2	C35-49C	EL296UH110XV60C	9145937
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-49C	SL280UH090V60C	9145938
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-49C	SL280UH090XV60C	9145939
ML14XC1-060-230	TXV	59000	14.25	12.2	C35-49C	SL280UH110V60C	9145940
ML14XC1-060-230	TXV	59000	14.25	12.2	C35-49C	SL280UH110XV60C	9145941
ML14XC1-060-230	TXV	58000	14.25	12	C35-49C	SLP98UH090XV60C	9145942

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-060-230	TXV	58000	14.25	12.2	C35-49C	SLP98UH110XV60C	9145943
ML14XC1-060-230	TXV	59000	14	12	C35-49C		9145944
ML14XC1-060-230	TXV	57500	14.25	12	C35-50/60C	EL180UH090E60C	9145945
ML14XC1-060-230	TXV	57500	14	12	C35-50/60C	EL180UH110E60C	9145946
ML14XC1-060-230	TXV	57500	14	12	C35-50/60C	EL180UH110XE60C	9145947
ML14XC1-060-230	TXV	57500	14	12	C35-50/60C	EL195UH110XE60C	9145948
ML14XC1-060-230	TXV	57500	14	12	C35-50/60C	EL296UH110XE60C	9145949
ML14XC1-060-230	TXV	57500	14	11.7	C35-50/60C	SL280UH090V60C	9145950
ML14XC1-060-230	TXV	57500	14	11.7	C35-50/60C	SL280UH090XV60C	9145951
ML14XC1-060-230	TXV	60000	14.5	12.5	C35-60C	EL180UH090E60C	9145952
ML14XC1-060-230	TXV	59500	14.5	12.5	C35-60C	EL180UH110E60C	9145953
ML14XC1-060-230	TXV	59500	14.5	12.5	C35-60C	EL180UH110XE60C	9145954
ML14XC1-060-230	TXV	59500	14.5	12.2	C35-60C	EL195UH110XE60C	9145955
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-60C	EL296UH090XV60C	9145956
ML14XC1-060-230	TXV	59500	14.5	12.2	C35-60C	EL296UH110XE60C	9145957
ML14XC1-060-230	TXV	59000	14.5	12.5	C35-60C	EL296UH110XV60C	9145958
ML14XC1-060-230	TXV	60000	14.5	12.5	C35-60C	SL280UH090V60C	9145959
ML14XC1-060-230	TXV	60000	14.5	12.5	C35-60C	SL280UH090XV60C	9145960
ML14XC1-060-230	TXV	59500	14.5	12.2	C35-60C	SL280UH110V60C	9145961
ML14XC1-060-230	TXV	59500	14.5	12.2	C35-60C	SL280UH110XV60C	9145962
ML14XC1-060-230	TXV	59000	14.5	12.2	C35-60C	SLP98UH090XV60C	9145963
ML14XC1-060-230	TXV	59000	14.5	12.5	C35-60C	SLP98UH110XV60C	9145964
ML14XC1-060-230	TXV	60000	14.25	12.2	C35-60C		9145965
ML14XC1-060-230	TXV	60000	14.5	12.5	C35-60D	EL180UH135E60D	9145966
ML14XC1-060-230	TXV	60000	14.25	12.2	C35-60D	EL195UH135XE60D	9145967
ML14XC1-060-230	TXV	60000	14.25	12.2	C35-60D	EL296UH135XE60D	9145968
ML14XC1-060-230	TXV	59000	14.5	12.5	C35-60D	EL296UH135XV60D	9145969
ML14XC1-060-230	TXV	59500	14.5	12.5	C35-60D	SL280UH135V60D	9145970
ML14XC1-060-230	TXV	59500	15	12.5	C35-60D	SLP98UH135XV60D	9145971
ML14XC1-060-230	TXV	59500	14	12	C35-60D		9145972
ML14XC1-060-230	TXV	58500	14.5	12.2	CBA27UHE-060		10259432
ML14XC1-060-230	TXV	59500	14.25	12.2	CBX25UH-060		9145973
ML14XC1-060-230	TXV	59500	15.1	12.5	CBX25UHV-060		9145974
ML14XC1-060-230	TXV	59000	14.5	12.2	CBX27UH-060		9145975
ML14XC1-060-230	TXV	58500	14.25	12.2	CBX32M-060		9145976
ML14XC1-060-230	TXV	58000	14.25	12	CBX32MV-048		9145977
ML14XC1-060-230	TXV	58500	14.25	12.2	CBX32MV-060		9145978
ML14XC1-060-230	TXV	58500	14.5	12.2	CBX32MV-068		9145979
ML14XC1-060-230	TXV	59500	14.5	12.5	CH23-65	EL180UH090E60C	9145980
ML14XC1-060-230	TXV	59000	14.5	12.2	CH23-65	EL180UH110E60C	9145981
ML14XC1-060-230	TXV	59500	14.5	12.5	CH23-68	EL180UH135E60D	9145982
ML14XC1-060-230	TXV	59500	14.25	12.2	CH23-68	EL195UH135XE60D	9145983
ML14XC1-060-230	TXV	58500	14.5	12.2	CH23-68	EL296UH090XV60C	9145984
ML14XC1-060-230	TXV	59000	14.5	12.2	CH23-68	EL296UH110XV60C	9145985
ML14XC1-060-230	TXV	59500	14.25	12.2	CH23-68	EL296UH135XE60D	9145986
ML14XC1-060-230	TXV	59500	14.5	12.2	CH23-68	EL296UH135XV60D	9145987
ML14XC1-060-230	TXV	59000	14.5	12.2	CH23-68	SL280UH110V60C	9145988
ML14XC1-060-230	TXV	59000	15.1	12.5	CH23-68	SL280UH135V60D	9145989
ML14XC1-060-230	TXV	59000	14	12	CH23-68		9145990

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-060-230	TXV	58500	14.5	12.2	CH33-49	EL180UH090E60C	9145991
ML14XC1-060-230	TXV	58500	14.5	12.2	CH33-49	EL180UH110E60C	9145992
ML14XC1-060-230	TXV	58500	14.25	12.2	CH33-49	EL195UH110XE60C	9145993
ML14XC1-060-230	TXV	58000	14.25	12	CH33-49	EL296UH090XV60C	9145994
ML14XC1-060-230	TXV	58500	14.25	12.2	CH33-49	EL296UH110XE60C	9145995
ML14XC1-060-230	TXV	58500	14.25	12	CH33-49	EL296UH110XV60C	9145996
ML14XC1-060-230	TXV	59000	14.5	12.2	CH33-49	SL280UH090V60C	9146539
ML14XC1-060-230	TXV	58500	14.25	12.2	CH33-49	SL280UH110V60C	9146540
ML14XC1-060-230	TXV	58000	14.25	12	CH33-49	SLP98UH090XV60C	9145997
ML14XC1-060-230	TXV	58000	14.25	12.2	CH33-49	SLP98UH110XV60C	9145998
ML14XC1-060-230	TXV	59000	14	12	CH33-49		9146000
ML14XC1-060-230	TXV	58500	14.25	12.2	CH33-50/60C	SL280UH090V60C	9146541
ML14XC1-060-230	TXV	58000	14	12	CH33-50/60C	SL280UH110V60C	9146542
ML14XC1-060-230	TXV	58500	14	11.7	CH33-50/60C		9146001
ML14XC1-060-230	TXV	58500	14.25	12.2	CH33-60D	EL180UH135E60D	9146002
ML14XC1-060-230	TXV	58000	14	11.7	CH33-60D	EL195UH135XE60D	9146003
ML14XC1-060-230	TXV	58000	14	11.7	CH33-60D	EL296UH135XE60D	9146004
ML14XC1-060-230	TXV	58500	14.25	12.2	CH33-60D	EL296UH135XV60D	9146005
ML14XC1-060-230	TXV	58000	14.5	12.5	CH33-60D	SL280UH135V60D	9146006
ML14XC1-060-230	TXV	58000	14.25	12.2	CH33-60D	SLP98UH135XV60D	9146007
ML14XC1-060-230	TXV	59000	14.5	12.2	CH33-62D	EL180UH135E60D	9146008
ML14XC1-060-230	TXV	59000	14.25	12	CH33-62D	EL195UH135XE60D	9146009
ML14XC1-060-230	TXV	59000	14.25	12	CH33-62D	EL296UH135XE60D	9146010
ML14XC1-060-230	TXV	59000	14.25	12.2	CH33-62D	EL296UH135XV60D	9146011
ML14XC1-060-230	TXV	58500	14.5	12.5	CH33-62D	SL280UH135V60D	9146543
ML14XC1-060-230	TXV	58500	14.5	12.2	CH33-62D	SLP98UH135XV60D	9146012
ML14XC1-060-230	TXV	58500	14	11.7	CH33-62D		9146014
ML14XC1-060-230	TXV	60000	14	12	CH35-51C	EL180UH090E60C	9146015
ML14XC1-060-230	TXV	60000	14	12	CH35-51C	EL180UH110E60C	9146016
ML14XC1-060-230	TXV	59500	14	11.7	CH35-51C	EL195UH110XE60C	9146017
ML14XC1-060-230	TXV	58500	14.25	12.2	CH35-51C	EL296UH090XV60C	9146018
ML14XC1-060-230	TXV	59500	14	11.7	CH35-51C	EL296UH110XE60C	9146019
ML14XC1-060-230	TXV	59000	14.25	12.2	CH35-51C	EL296UH110XV60C	9146020
ML14XC1-060-230	TXV	59000	14.25	12.2	CH35-51C	SL280UH090V60C	9146544
ML14XC1-060-230	TXV	58500	14.25	12	CH35-51C	SL280UH110V60C	9146545
ML14XC1-060-230	TXV	58500	14.25	12.2	CH35-51C	SLP98UH090XV60C	9146021
ML14XC1-060-230	TXV	58500	14.5	12.2	CH35-51C	SLP98UH110XV60C	9146022
ML14XC1-060-230	TXV	59000	14	12	CH35-51C		9146023
ML14XC1-060-230	TXV	59000	14.5	12.2	CH35-60D	EL180UH135E60D	9146024
ML14XC1-060-230	TXV	59000	14.25	12	CH35-60D	EL195UH135XE60D	9146025
ML14XC1-060-230	TXV	59000	14.25	12	CH35-60D	EL296UH135XE60D	9146026
ML14XC1-060-230	TXV	59500	14.5	12.2	CH35-60D	EL296UH135XV60D	9146027
ML14XC1-060-230	TXV	58500	14.5	12.5	CH35-60D	SL280UH135V60D	9146546
ML14XC1-060-230	TXV	59000	14.5	12.2	CH35-60D	SLP98UH135XV60D	9146028
ML14XC1-060-230	TXV	57500	14.25	12	CR33-50/60	EL180DF110E60C	9146030
ML14XC1-060-230	TXV	57500	14.25	12	CR33-50/60	EL195DF110XE60C	9146031
ML14XC1-060-230	TXV	57500	14.25	12	CR33-50/60	EL296DF110XE60C	9146032
ML14XC1-060-230	TXV	57000	14	11.7	CR33-50/60	SL280DF090V60C	9146033
ML14XC1-060-230	TXV	57500	14	12	CR33-50/60	SL280DF110V60C	9146034

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS -041, -047, -048, -059, -060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-49C	EL180UH090E60C	9146083
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-49C	EL180UH110E60C	9146084
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-49C	EL180UH110XE60C	9146085
ML14XC1-060-230	TXV	58500	14.25	12.2	CX35-49C	EL195UH110XE60C	9146086
ML14XC1-060-230	TXV	58000	14.25	12	CX35-49C	EL296UH090XV60C	9146087
ML14XC1-060-230	TXV	58500	14.25	12.2	CX35-49C	EL296UH110XE60C	9146088
ML14XC1-060-230	TXV	58000	14.25	12.2	CX35-49C	EL296UH110XV60C	9146089
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-49C	SL280UH090V60C	9146090
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-49C	SL280UH090XV60C	9146091
ML14XC1-060-230	TXV	59000	14.25	12.2	CX35-49C	SL280UH110V60C	9146092
ML14XC1-060-230	TXV	59000	14.25	12.2	CX35-49C	SL280UH110XV60C	9146093
ML14XC1-060-230	TXV	58000	14.25	12	CX35-49C	SLP98UH090XV60C	9146094
ML14XC1-060-230	TXV	58000	14.25	12.2	CX35-49C	SLP98UH110XV60C	9146095
ML14XC1-060-230	TXV	59000	14	12	CX35-49C		9146096
ML14XC1-060-230	TXV	57500	14.25	12	CX35-50/60C	EL180UH090E60C	9146097
ML14XC1-060-230	TXV	57500	14	12	CX35-50/60C	EL180UH110E60C	9146098
ML14XC1-060-230	TXV	57500	14	12	CX35-50/60C	EL180UH110XE60C	9146099
ML14XC1-060-230	TXV	57500	14	12	CX35-50/60C	EL195UH110XE60C	9146100
ML14XC1-060-230	TXV	57500	14	12	CX35-50/60C	EL296UH110XE60C	9146101
ML14XC1-060-230	TXV	57500	14	11.7	CX35-50/60C	SL280UH090V60C	9146102
ML14XC1-060-230	TXV	57500	14	11.7	CX35-50/60C	SL280UH090XV60C	9146103
ML14XC1-060-230	TXV	60000	14.5	12.5	CX35-60C	EL180UH090E60C	9146104
ML14XC1-060-230	TXV	59500	14.5	12.5	CX35-60C	EL180UH110E60C	9146105
ML14XC1-060-230	TXV	59500	14.5	12.5	CX35-60C	EL180UH110XE60C	9146106
ML14XC1-060-230	TXV	59500	14.5	12.2	CX35-60C	EL195UH110XE60C	9146107
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-60C	EL296UH090XV60C	9146108
ML14XC1-060-230	TXV	59500	14.5	12.2	CX35-60C	EL296UH110XE60C	9146109
ML14XC1-060-230	TXV	59000	14.5	12.5	CX35-60C	EL296UH110XV60C	9146110
ML14XC1-060-230	TXV	60000	14.5	12.5	CX35-60C	SL280UH090V60C	9146111
ML14XC1-060-230	TXV	60000	14.5	12.5	CX35-60C	SL280UH090XV60C	9146112
ML14XC1-060-230	TXV	59500	14.5	12.2	CX35-60C	SL280UH110V60C	9146113
ML14XC1-060-230	TXV	59500	14.5	12.2	CX35-60C	SL280UH110XV60C	9146114
ML14XC1-060-230	TXV	59000	14.5	12.2	CX35-60C	SLP98UH090XV60C	9146115
ML14XC1-060-230	TXV	59000	14.5	12.5	CX35-60C	SLP98UH110XV60C	9146116
ML14XC1-060-230	TXV	60000	14.25	12.2	CX35-60C		9146117
ML14XC1-060-230	TXV	60000	14.5	12.5	CX35-60D	EL180UH135E60D	9146118
ML14XC1-060-230	TXV	60000	14.25	12.2	CX35-60D	EL195UH135XE60D	9146119
ML14XC1-060-230	TXV	60000	14.25	12.2	CX35-60D	EL296UH135XE60D	9146120
ML14XC1-060-230	TXV	59000	14.5	12.5	CX35-60D	EL296UH135XV60D	9146121
ML14XC1-060-230	TXV	59500	15	12.5	CX35-60D	SL280UH135V60D	9146122
ML14XC1-060-230	TXV	59500	15	12.5	CX35-60D	SLP98UH135XV60D	9146123
ML14XC1-060-230	TXV	59500	14	12	CX35-60D		9146124
ML14XC1-060-230	TXV	60000	14.25	12.2	CX38-62C		10552886

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S018-230	RFC	18000	14.25	12.2	CH33-31A		9147655
ML14XC1S018-230	RFC	18000	14	12.2	CH33-31B		9147664
ML14XC1S018-230	RFC	18000	14	12.2	CR33-30/36A		9147694
ML14XC1S018-230	RFC	18000	14	12.2	CR33-30/36B		9147699
ML14XC1S018-230	TXV	18000	16	13	C35-24A	EL180UH045E36A	9147606
ML14XC1S018-230	TXV	18000	16	13	C35-24A	EL180UH045XE36A	9147607
ML14XC1S018-230	TXV	18000	15.5	12.5	C35-24B	EL180UH070E36B	9147610
ML14XC1S018-230	TXV	18000	15.5	12.5	C35-24B	EL180UH070XE36B	9147611
ML14XC1S018-230	TXV	19600	16	13	C35-24B	EL195UH030XE24B	9147608
ML14XC1S018-230	TXV	19600	16	13	C35-24B	EL195UH045XE24B	9147609
ML14XC1S018-230	TXV	19600	16	13	C35-24B	EL195UH045XE36B	9147612
ML14XC1S018-230	TXV	19600	16	13	C35-24B	EL296UH045XE36B	9147613
ML14XC1S018-230	TXV	19600	16	13	C35-24B	EL296UH045XV36B	9147614
ML14XC1S018-230	TXV	19600	16	13	C35-24B	EL296UH070XV36B	9147615
ML14XC1S018-230	TXV	19600	16	13	C35-24B	SLP98UH070XV36B	9147616
ML14XC1S018-230	TXV	18000	16	13	C35-30A	EL180UH045E36A	9147617
ML14XC1S018-230	TXV	18000	16	13	C35-30A	EL180UH045XE36A	9147618
ML14XC1S018-230	TXV	18000	14.5	12.2	C35-30A		9147619
ML14XC1S018-230	TXV	18000	15.5	13	C35-30B	EL180UH070E36B	9147622
ML14XC1S018-230	TXV	18000	15.5	13	C35-30B	EL180UH070XE36B	9147623
ML14XC1S018-230	TXV	20000	16	13.5	C35-30B	EL195UH030XE24B	9147620
ML14XC1S018-230	TXV	20000	16	13.5	C35-30B	EL195UH045XE24B	9147621
ML14XC1S018-230	TXV	18000	16	13	C35-30B	EL195UH045XE36B	9147624
ML14XC1S018-230	TXV	18000	16	13	C35-30B	EL296UH045XE36B	9147625
ML14XC1S018-230	TXV	20000	16	13.5	C35-30B	EL296UH045XV36B	9147626
ML14XC1S018-230	TXV	20000	17	13.5	C35-30B	EL296UH070XV36B	9147627
ML14XC1S018-230	TXV	20000	17	13.5	C35-30B	SLP98UH070XV36B	9147628
ML14XC1S018-230	TXV	18000	14.5	12.2	C35-30B		9147629
ML14XC1S018-230	TXV	18000	16	13	CBA27UHE-018		10259433
ML14XC1S018-230	TXV	18000	16	13	CBA27UHE-024		10259434
ML14XC1S018-230	TXV	18000	15.5	12.5	CBX25UHV-018		9147630
ML14XC1S018-230	TXV	18000	16	13	CBX25UHV-024		9147631
ML14XC1S018-230	TXV	18000	16	13	CBX27UH-018		9147632
ML14XC1S018-230	TXV	18000	16	13	CBX27UH-024		9147633
ML14XC1S018-230	TXV	18000	14.5	12.2	CBX32M-018/024		9147634
ML14XC1S018-230	TXV	18000	14.5	12.5	CBX32M-030		9147635
ML14XC1S018-230	TXV	18000	16	13	CBX32MV-018/024		9147636
ML14XC1S018-230	TXV	18000	16	13	CBX32MV-024/030		9147637
ML14XC1S018-230	TXV	18000	16	13	CBX40UHV-024		9147638
ML14XC1S018-230	TXV	18000	16	13	CBX40UHV-030		9147639
ML14XC1S018-230	TXV	18000	16	13	CH33-19	EL180UH045E36A	9147640
ML14XC1S018-230	TXV	18000	16	13	CH33-19	EL180UH045XE36A	9147641
ML14XC1S018-230	TXV	18000	15.5	12.5	CH33-24/30	EL180UH045E36A	9147642
ML14XC1S018-230	TXV	18000	15.5	12.5	CH33-24/30	EL180UH045XE36A	9147643
ML14XC1S018-230	TXV	18000	16	13	CH33-25A	EL180UH045E36A	9147644
ML14XC1S018-230	TXV	18000	16	13	CH33-25A	EL180UH045XE36A	9147645
ML14XC1S018-230	TXV	18000	15.5	12.5	CH33-25B	EL180UH070E36B	9147646
ML14XC1S018-230	TXV	18000	15.5	12.5	CH33-25B	EL180UH070XE36B	9147647
ML14XC1S018-230	TXV	19800	16	13	CH33-25B	EL195UH030XE24B	9147648

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S018-230	TXV	19800	16	13	CH33-25B	EL195UH045XE24B	9147649
ML14XC1S018-230	TXV	19400	16	13	CH33-25B	EL195UH045XE36B	9147650
ML14XC1S018-230	TXV	19400	16	13	CH33-25B	EL296UH045XE36B	9147651
ML14XC1S018-230	TXV	19400	16	13	CH33-25B	EL296UH045XV36B	9147652
ML14XC1S018-230	TXV	18000	16	13	CH33-31A	EL180UH045E36A	9147653
ML14XC1S018-230	TXV	18000	16	13	CH33-31A	EL180UH045XE36A	9147654
ML14XC1S018-230	TXV	18000	14.5	12.2	CH33-31A		9147656
ML14XC1S018-230	TXV	18000	16	13	CH33-31B	EL180UH070E36B	9147657
ML14XC1S018-230	TXV	18000	16	13	CH33-31B	EL180UH070XE36B	9147658
ML14XC1S018-230	TXV	20000	16	13.5	CH33-31B	EL195UH030XE24B	9147659
ML14XC1S018-230	TXV	20000	16	13.5	CH33-31B	EL195UH045XE24B	9147660
ML14XC1S018-230	TXV	18000	16	13	CH33-31B	EL195UH045XE36B	9147661
ML14XC1S018-230	TXV	18000	16	13	CH33-31B	EL296UH045XE36B	9147662
ML14XC1S018-230	TXV	20000	17	13.5	CH33-31B	EL296UH045XV36B	9147663
ML14XC1S018-230	TXV	18000	14.5	12.2	CH33-31B		9147665
ML14XC1S018-230	TXV	18000	16	13	CH35-18A	EL180UH045E36A	9147666
ML14XC1S018-230	TXV	18000	16	13	CH35-18A	EL180UH045XE36A	9147667
ML14XC1S018-230	TXV	18000	16	13	CH35-24A	EL180UH045E36A	9147668
ML14XC1S018-230	TXV	18000	16	13	CH35-24A	EL180UH045XE36A	9147669
ML14XC1S018-230	TXV	18000	15.5	12.5	CH35-24B	EL180UH070E36B	9147670
ML14XC1S018-230	TXV	18000	15.5	12.5	CH35-24B	EL180UH070XE36B	9147671
ML14XC1S018-230	TXV	19800	16	13	CH35-24B	EL195UH030XE24B	9147672
ML14XC1S018-230	TXV	19800	16	13	CH35-24B	EL195UH045XE24B	9147673
ML14XC1S018-230	TXV	18000	15.5	12.5	CH35-24B	EL195UH045XE36B	9147674
ML14XC1S018-230	TXV	18000	15.5	12.5	CH35-24B	EL296UH045XE36B	9147675
ML14XC1S018-230	TXV	19600	16	13	CH35-24B	EL296UH045XV36B	9147676
ML14XC1S018-230	TXV	18000	16	13	CH35-30A	EL180UH045E36A	9147677
ML14XC1S018-230	TXV	18000	16	13	CH35-30A	EL180UH045XE36A	9147678
ML14XC1S018-230	TXV	18000	14.5	12.2	CH35-30A		9147679
ML14XC1S018-230	TXV	18000	16	13	CH35-30B	EL180UH070E36B	9147680
ML14XC1S018-230	TXV	18000	16	13	CH35-30B	EL180UH070XE36B	9147681
ML14XC1S018-230	TXV	20000	16	13.5	CH35-30B	EL195UH030XE24B	9147682
ML14XC1S018-230	TXV	20000	16	13.5	CH35-30B	EL195UH045XE24B	9147683
ML14XC1S018-230	TXV	18000	16	13	CH35-30B	EL195UH045XE36B	9147684
ML14XC1S018-230	TXV	18000	16	13	CH35-30B	EL296UH045XE36B	9147685
ML14XC1S018-230	TXV	19600	17	13.5	CH35-30B	EL296UH045XV36B	9147686
ML14XC1S018-230	TXV	18000	14.5	12.2	CH35-30B		9147687
ML14XC1S018-230	TXV	18000	15.5	12.5	CR33-18	EL180DF045E36A	9147688
ML14XC1S018-230	TXV	18000	15.1	12.5	CR33-24A	EL180DF045E36A	9147689
ML14XC1S018-230	TXV	18000	14.5	12.5	CR33-24B	EL180DF070E36B	9147690
ML14XC1S018-230	TXV	18000	14.5	12.2	CR33-24B	EL195DF045E36B	9147691
ML14XC1S018-230	TXV	18000	14.5	12.2	CR33-24B	EL195DF070XE48B	10498873
ML14XC1S018-230	TXV	18000	16	13	CR33-30/36A	EL180DF045E36A	9147693
ML14XC1S018-230	TXV	18000	14.5	12.2	CR33-30/36A		9147695
ML14XC1S018-230	TXV	18000	15.5	13	CR33-30/36B	EL180DF070E36B	9147696
ML14XC1S018-230	TXV	18000	15.5	12.5	CR33-30/36B	EL195DF045E36B	9147697
ML14XC1S018-230	TXV	18000	15.5	12.5	CR33-30/36B	EL195DF070XE48B	10498874
ML14XC1S018-230	TXV	18000	14.5	12.2	CR33-30/36B		9147700
ML14XC1S018-230	TXV	18800	15.5	12.5	CX35-18/24A	EL180UH045E36A	9147745

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S018-230	TXV	18800	15.5	12.5	CX35-18/24A	EL180UH045XE36A	9147746
ML14XC1S018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL180UH070E36B	9147747
ML14XC1S018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL180UH070XE36B	9147748
ML14XC1S018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL195UH045XE36B	9147749
ML14XC1S018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL296UH045XE36B	9147750
ML14XC1S018-230	TXV	18000	16	13	CX35-24A	EL180UH045E36A	9147751
ML14XC1S018-230	TXV	18000	16	13	CX35-24A	EL180UH045XE36A	9147752
ML14XC1S018-230	TXV	18000	15.5	12.5	CX35-24B	EL180UH070E36B	9147753
ML14XC1S018-230	TXV	18000	15.5	12.5	CX35-24B	EL180UH070XE36B	9147754
ML14XC1S018-230	TXV	19800	16	13	CX35-24B	EL195UH030XE24B	9147755
ML14XC1S018-230	TXV	19800	16	13	CX35-24B	EL195UH045XE24B	9147756
ML14XC1S018-230	TXV	19600	16	13	CX35-24B	EL195UH045XE36B	9147757
ML14XC1S018-230	TXV	19600	16	13	CX35-24B	EL296UH045XE36B	9147758
ML14XC1S018-230	TXV	19600	16	13	CX35-24B	EL296UH045XV36B	9147759
ML14XC1S018-230	TXV	19800	16	13	CX35-24B	EL296UH070XV36B	9147760
ML14XC1S018-230	TXV	19800	16	13	CX35-24B	SLP98UH070XV36B	9147761
ML14XC1S018-230	TXV	18000	16	13	CX35-30A	EL180UH045E36A	9147762
ML14XC1S018-230	TXV	18000	16	13	CX35-30A	EL180UH045XE36A	9147763
ML14XC1S018-230	TXV	18000	14.5	12.2	CX35-30A		9147764
ML14XC1S018-230	TXV	18000	15.5	13	CX35-30B	EL180UH070E36B	9147765
ML14XC1S018-230	TXV	18000	15.5	13	CX35-30B	EL180UH070XE36B	9147766
ML14XC1S018-230	TXV	20000	16	13.5	CX35-30B	EL195UH030XE24B	9147767
ML14XC1S018-230	TXV	20000	16	13.5	CX35-30B	EL195UH045XE24B	9147768
ML14XC1S018-230	TXV	18000	16	13	CX35-30B	EL195UH045XE36B	9147769
ML14XC1S018-230	TXV	18000	16	13	CX35-30B	EL296UH045XE36B	9147770
ML14XC1S018-230	TXV	20000	16	13.5	CX35-30B	EL296UH045XV36B	9147771
ML14XC1S018-230	TXV	20000	17	13.5	CX35-30B	EL296UH070XV36B	9147772
ML14XC1S018-230	TXV	20000	17	13.5	CX35-30B	SLP98UH070XV36B	9147773
ML14XC1S018-230	TXV	18000	14.5	12.2	CX35-30B		9147774
ML14XC1S018-230	TXV	18000	14.25	12.2	CX38-25B		10552957
ML14XC1S024-230	RFC	24000	14.25	12.2	C35-30A		9150131
ML14XC1S024-230	RFC	24000	14.25	12.2	C35-30B		9150132
ML14XC1S024-230	RFC	24000	14.25	12.2	C35-36A		9150133
ML14XC1S024-230	RFC	24000	14.25	12.2	C35-36B		9150134
ML14XC1S024-230	RFC	24000	14.25	12.2	CH33-31A		9148052
ML14XC1S024-230	RFC	24000	14.25	12.2	CH33-31B		9148066
ML14XC1S024-230	RFC	24000	14	12.2	CH33-42B		9148088
ML14XC1S024-230	RFC	24000	14.25	12.2	CH33-43B		9148092
ML14XC1S024-230	TXV	24000	16	13	C35-24A	EL180UH045E36A	9147903
ML14XC1S024-230	TXV	24000	16	13	C35-24A	EL180UH045XE36A	9147904
ML14XC1S024-230	TXV	24000	16	13	C35-24A	SL280UH070V36A	9147905
ML14XC1S024-230	TXV	24000	16	13	C35-24A	SL280UH070XV36A	9147906
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL180UH070E36B	9147907
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL180UH070XE36B	9147908
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL195UH030XE24B	9147909
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL195UH045XE24B	9147910
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL195UH045XE36B	9147911
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL195UH070XE36B	9147912
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL296UH045XE36B	9147913

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL296UH045XV36B	9147914
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL296UH070XE36B	9147915
ML14XC1S024-230	TXV	24000	16	13	C35-24B	EL296UH070XV36B	9147916
ML14XC1S024-230	TXV	24000	16	13	C35-24B	SL280UH090V36B	9147917
ML14XC1S024-230	TXV	24000	16	13	C35-24B	SL280UH090V48B	9147918
ML14XC1S024-230	TXV	24000	16	13	C35-24B	SL280UH090XV48B	9147919
ML14XC1S024-230	TXV	24000	16	13	C35-24B	SLP98UH070XV36B	9147920
ML14XC1S024-230	TXV	24000	16	13	C35-30/36A	EL180UH045E36A	9147921
ML14XC1S024-230	TXV	24000	16	13	C35-30/36A	EL180UH045XE36A	9147922
ML14XC1S024-230	TXV	24000	16	13	C35-30/36A	SL280UH070V36A	9147923
ML14XC1S024-230	TXV	24000	16	13	C35-30/36A	SL280UH070XV36A	9147924
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL180UH070E36B	9147925
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL180UH070XE36B	9147926
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL195UH030XE24B	9147927
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL195UH045XE24B	9147928
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL195UH045XE36B	9147929
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL195UH070XE36B	9147930
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL296UH045XE36B	9147931
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL296UH045XV36B	9147932
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL296UH070XE36B	9147933
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	EL296UH070XV36B	9147934
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V36B	9147935
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V48B	9147936
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	SL280UH090XV48B	9147937
ML14XC1S024-230	TXV	24000	16	13	C35-30/36B	SLP98UH070XV36B	9147938
ML14XC1S024-230	TXV	24000	16	13	C35-30/36C	EL296UH090XV36C	9147939
ML14XC1S024-230	TXV	24000	16	13	C35-30/36C	SLP98UH090XV36C	9147940
ML14XC1S024-230	TXV	24000	16	13	C35-30A	EL180UH045E36A	9147941
ML14XC1S024-230	TXV	24000	16	13	C35-30A	EL180UH045XE36A	9147942
ML14XC1S024-230	TXV	24000	16	13	C35-30A	SL280UH070V36A	9147943
ML14XC1S024-230	TXV	24000	16	13	C35-30A	SL280UH070XV36A	9147944
ML14XC1S024-230	TXV	24000	14.5	12.2	C35-30A		9147945
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL180UH070E36B	9147946
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL180UH070XE36B	9147947
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL195UH030XE24B	9147948
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL195UH045XE24B	9147949
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL195UH045XE36B	9147950
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL195UH070XE36B	9147951
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL296UH045XE36B	9147952
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL296UH045XV36B	9147953
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL296UH070XE36B	9147954
ML14XC1S024-230	TXV	24000	16	13	C35-30B	EL296UH070XV36B	9147955
ML14XC1S024-230	TXV	24000	16	13	C35-30B	SL280UH090V36B	9147956
ML14XC1S024-230	TXV	24000	16	13	C35-30B	SL280UH090V48B	9147957
ML14XC1S024-230	TXV	24000	16	13	C35-30B	SL280UH090XV48B	9147958
ML14XC1S024-230	TXV	24000	16	13	C35-30B	SLP98UH070XV36B	9147959
ML14XC1S024-230	TXV	24000	14.5	12.2	C35-30B		9147960
ML14XC1S024-230	TXV	24000	16	13	C35-36A	EL180UH045E36A	9147961
ML14XC1S024-230	TXV	24000	16	13	C35-36A	EL180UH045XE36A	9147962

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	C35-36A	SL280UH070V36A	9147963
ML14XC1S024-230	TXV	24000	16	13	C35-36A	SL280UH070XV36A	9147964
ML14XC1S024-230	TXV	24000	14.5	12.2	C35-36A		9147965
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL180UH070E36B	9147966
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL180UH070XE36B	9147967
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL195UH030XE24B	9147968
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL195UH045XE24B	9147969
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL195UH045XE36B	9147970
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL195UH070XE36B	9147971
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL296UH045XE36B	9147972
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL296UH045XV36B	9147973
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL296UH070XE36B	9147974
ML14XC1S024-230	TXV	24000	16	13	C35-36B	EL296UH070XV36B	9147975
ML14XC1S024-230	TXV	24000	16	13	C35-36B	SL280UH090V36B	9147976
ML14XC1S024-230	TXV	24000	16	13	C35-36B	SL280UH090V48B	9147977
ML14XC1S024-230	TXV	24000	16	13	C35-36B	SL280UH090XV48B	9147978
ML14XC1S024-230	TXV	24000	16	13	C35-36B	SLP98UH070XV36B	9147979
ML14XC1S024-230	TXV	24000	14.5	12.2	C35-36B		9147980
ML14XC1S024-230	TXV	24000	16	13	CBA27UHE-024		10259435
ML14XC1S024-230	TXV	24000	16	13	CBA27UHE-030		10259436
ML14XC1S024-230	TXV	24000	14.5	12.2	CBX25UH-036		9147981
ML14XC1S024-230	TXV	24000	16	13	CBX25UHV-024		9147982
ML14XC1S024-230	TXV	24000	16	13	CBX25UHV-030		9147983
ML14XC1S024-230	TXV	24000	16	13	CBX25UHV-036		9147984
ML14XC1S024-230	TXV	24000	16	13	CBX27UH-024		9147985
ML14XC1S024-230	TXV	24000	16	13	CBX27UH-030		9147986
ML14XC1S024-230	TXV	24000	14.5	12.2	CBX32M-018/024		9147987
ML14XC1S024-230	TXV	24000	15.1	12.5	CBX32M-030		9147988
ML14XC1S024-230	TXV	24000	15.5	12.5	CBX32MV-018/024		9147989
ML14XC1S024-230	TXV	24000	16	13	CBX32MV-024/030		9147990
ML14XC1S024-230	TXV	24000	16	13	CBX40UHV-024		9147991
ML14XC1S024-230	TXV	23800	15.5	12.5	CH23-31	EL180UH045E36A	9147992
ML14XC1S024-230	TXV	23800	15.5	12.5	CH23-31	EL180UH045XE36A	9147993
ML14XC1S024-230	TXV	23800	15.5	13	CH23-31	EL180UH070E36B	9147994
ML14XC1S024-230	TXV	23800	15.5	13	CH23-31	EL180UH070XE36B	9147995
ML14XC1S024-230	TXV	23200	15.5	12.5	CH23-31	EL195UH030XE24B	9147996
ML14XC1S024-230	TXV	23200	15.5	12.5	CH23-31	EL195UH045XE24B	9147997
ML14XC1S024-230	TXV	23400	15.1	12.5	CH23-31	EL195UH045XE36B	9147998
ML14XC1S024-230	TXV	23800	15.5	12.5	CH23-31	EL195UH070XE36B	9147999
ML14XC1S024-230	TXV	23400	15.1	12.5	CH23-31	EL296UH045XE36B	9148000
ML14XC1S024-230	TXV	23600	15.5	12.5	CH23-31	EL296UH045XV36B	9148001
ML14XC1S024-230	TXV	23800	15.5	12.5	CH23-31	EL296UH070XE36B	9148002
ML14XC1S024-230	TXV	23600	15.5	12.5	CH23-31	EL296UH070XV36B	9148003
ML14XC1S024-230	TXV	23600	15.5	12.5	CH23-31	SL280UH070V36A	9148004
ML14XC1S024-230	TXV	23600	15.5	12.5	CH23-31	SL280UH070XV36A	9148005
ML14XC1S024-230	TXV	23400	15.5	12.5	CH23-31	SL280UH090V36B	9148006
ML14XC1S024-230	TXV	23600	15.5	12.5	CH23-31	SLP98UH070XV36B	9148007
ML14XC1S024-230	TXV	24200	16	13	CH23-41	EL180UH045E36A	9148008
ML14XC1S024-230	TXV	24200	16	13	CH23-41	EL180UH045XE36A	9148009

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL180UH070E36B	9148010
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL180UH070XE36B	9148011
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL195UH030XE24B	9148012
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL195UH045XE24B	9148013
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL195UH045XE36B	9148014
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL195UH070XE36B	9148015
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL296UH045XE36B	9148016
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL296UH045XV36B	9148017
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL296UH070XE36B	9148018
ML14XC1S024-230	TXV	24000	16	13	CH23-41	EL296UH070XV36B	9148019
ML14XC1S024-230	TXV	24000	16	13	CH23-41	SL280UH070V36A	9148020
ML14XC1S024-230	TXV	24000	16	13	CH23-41	SL280UH070XV36A	9148021
ML14XC1S024-230	TXV	24000	16	13	CH23-41	SL280UH090V36B	9148022
ML14XC1S024-230	TXV	24000	16	13	CH23-41	SLP98UH070XV36B	9148023
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-19	EL180UH045E36A	9148024
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-19	EL180UH045XE36A	9148025
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-19	SL280UH070V36A	9148026
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-19	SL280UH070XV36A	9148027
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-24/30	EL180UH045E36A	9148028
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-24/30	EL180UH045XE36A	9148029
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-24/30	SL280UH070V36A	9148030
ML14XC1S024-230	TXV	24000	15.5	12.5	CH33-24/30	SL280UH070XV36A	9148031
ML14XC1S024-230	TXV	24000	16	13	CH33-25A	EL180UH045E36A	9148032
ML14XC1S024-230	TXV	24000	16	13	CH33-25A	EL180UH045XE36A	9148033
ML14XC1S024-230	TXV	24000	16	13	CH33-25A	SL280UH070V36A	9148034
ML14XC1S024-230	TXV	24000	16	13	CH33-25A	SL280UH070XV36A	9148035
ML14XC1S024-230	TXV	24000	14.5	12.2	CH33-25A		10055356
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL180UH070E36B	9148036
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL180UH070XE36B	9148037
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL195UH030XE24B	9148038
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL195UH045XE24B	9148039
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL195UH045XE36B	9148040
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL195UH070XE36B	9148041
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL296UH045XE36B	9148042
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL296UH045XV36B	9148043
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL296UH070XE36B	9148044
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	EL296UH070XV36B	9148045
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	SL280UH090V36B	9148046
ML14XC1S024-230	TXV	24000	16	13	CH33-25B	SLP98UH070XV36B	9148047
ML14XC1S024-230	TXV	24000	14.25	12	CH33-25B		10055357
ML14XC1S024-230	TXV	24000	16	13	CH33-31A	EL180UH045E36A	9148048
ML14XC1S024-230	TXV	24000	16	13	CH33-31A	EL180UH045XE36A	9148049
ML14XC1S024-230	TXV	24000	16	13	CH33-31A	SL280UH070V36A	9148050
ML14XC1S024-230	TXV	24000	16	13	CH33-31A	SL280UH070XV36A	9148051
ML14XC1S024-230	TXV	24000	14.5	12.2	CH33-31A		9148053
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL180UH070E36B	9148054
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL180UH070XE36B	9148055
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL195UH030XE24B	9148056
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE24B	9148057

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE36B	9148058
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL195UH070XE36B	9148059
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL296UH045XE36B	9148060
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL296UH045XV36B	9148061
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL296UH070XE36B	9148062
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	EL296UH070XV36B	9148063
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	SL280UH090V36B	9148064
ML14XC1S024-230	TXV	24000	16	13	CH33-31B	SLP98UH070XV36B	9148065
ML14XC1S024-230	TXV	24000	14.5	12.2	CH33-31B		9148067
ML14XC1S024-230	TXV	24000	16	13	CH33-36A	EL180UH045E36A	9148068
ML14XC1S024-230	TXV	24000	16	13	CH33-36A	EL180UH045XE36A	9148069
ML14XC1S024-230	TXV	24000	16	13	CH33-36A	SL280UH070V36A	9148070
ML14XC1S024-230	TXV	24000	16	13	CH33-36A	SL280UH070XV36A	9148071
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL180UH070E36B	9148072
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL180UH070XE36B	9148073
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL195UH030XE24B	9148074
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL195UH045XE24B	9148075
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL195UH045XE36B	9148076
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL195UH070XE36B	9148077
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL296UH045XE36B	9148078
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL296UH045XV36B	9148079
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL296UH070XE36B	9148080
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	EL296UH070XV36B	9148081
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	SL280UH090V36B	9148082
ML14XC1S024-230	TXV	24000	16	13	CH33-36B	SLP98UH070XV36B	9148083
ML14XC1S024-230	TXV	24000	16	13	CH33-36C	EL296UH090XV36C	9148084
ML14XC1S024-230	TXV	24000	16	13	CH33-36C	SLP98UH090XV36C	9148085
ML14XC1S024-230	TXV	24000	16	13	CH33-42	EL195UH030XE24B	9148086
ML14XC1S024-230	TXV	24000	16	13	CH33-42	EL195UH045XE24B	9148087
ML14XC1S024-230	TXV	24000	16	13.5	CH33-43B	EL195UH030XE24B	9148089
ML14XC1S024-230	TXV	24000	16	13.5	CH33-43B	EL195UH045XE24B	9148090
ML14XC1S024-230	TXV	24000	16	13	CH33-43B	EL195UH045XE36B	9148091
ML14XC1S024-230	TXV	24000	15.5	12.5	CH35-18A	EL180UH045E36A	9148093
ML14XC1S024-230	TXV	24000	15.5	12.5	CH35-18A	EL180UH045XE36A	9148094
ML14XC1S024-230	TXV	24000	16	13	CH35-18A	SL280UH070V36A	9148095
ML14XC1S024-230	TXV	24000	16	13	CH35-18A	SL280UH070XV36A	9148096
ML14XC1S024-230	TXV	24000	16	13	CH35-24A	EL180UH045E36A	9148097
ML14XC1S024-230	TXV	24000	16	13	CH35-24A	EL180UH045XE36A	9148098
ML14XC1S024-230	TXV	24000	16	13	CH35-24A	SL280UH070V36A	9148099
ML14XC1S024-230	TXV	24000	16	13	CH35-24A	SL280UH070XV36A	9148100
ML14XC1S024-230	TXV	24000	14.5	12.2	CH35-24A		10055355
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL180UH070E36B	9148101
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL180UH070XE36B	9148102
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL195UH030XE24B	9148103
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL195UH045XE24B	9148104
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL195UH045XE36B	9148105
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL195UH070XE36B	9148106
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL296UH045XV36B	9148107
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	EL296UH070XV36B	9148108

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	SL280UH090V36B	9148109
ML14XC1S024-230	TXV	24000	16	13	CH35-24B	SLP98UH070XV36B	9148110
ML14XC1S024-230	TXV	24000	14.5	12.2	CH35-24B		9148111
ML14XC1S024-230	TXV	24000	16	13	CH35-30A	EL180UH045E36A	9148112
ML14XC1S024-230	TXV	24000	16	13	CH35-30A	EL180UH045XE36A	9148113
ML14XC1S024-230	TXV	24000	16	13	CH35-30A	SL280UH070V36A	9148114
ML14XC1S024-230	TXV	24000	16	13	CH35-30A	SL280UH070XV36A	9148115
ML14XC1S024-230	TXV	24000	14.5	12.2	CH35-30A		9148116
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL180UH070E36B	9148117
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL180UH070XE36B	9148118
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL195UH030XE24B	9148119
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE24B	9148120
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE36B	9148121
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL195UH070XE36B	9148122
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL296UH045XV36B	9148123
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	EL296UH070XV36B	9148124
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	SL280UH090V36B	9148125
ML14XC1S024-230	TXV	24000	16	13	CH35-30B	SLP98UH070XV36B	9148126
ML14XC1S024-230	TXV	24000	14.5	12.2	CH35-30B		9148127
ML14XC1S024-230	TXV	24000	16	13	CH35-36A	EL180UH045E36A	9148128
ML14XC1S024-230	TXV	24000	16	13	CH35-36A	EL180UH045XE36A	9148129
ML14XC1S024-230	TXV	24000	16	13	CH35-36A	SL280UH070V36A	9148130
ML14XC1S024-230	TXV	24000	16	13	CH35-36A	SL280UH070XV36A	9148131
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL180UH070E36B	9148132
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL180UH070XE36B	9148133
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL195UH030XE24B	9148134
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL195UH045XE24B	9148135
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL195UH045XE36B	9148136
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL195UH070XE36B	9148137
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL296UH045XV36B	9148138
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	EL296UH070XV36B	9148139
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	SL280UH090V36B	9148140
ML14XC1S024-230	TXV	24000	16	13	CH35-36B	SLP98UH070XV36B	9148141
ML14XC1S024-230	TXV	24000	16	13	CH35-36C	EL296UH090XV36C	9148142
ML14XC1S024-230	TXV	24000	16	13	CH35-36C	SLP98UH090XV36C	9148143
ML14XC1S024-230	TXV	23200	15.1	12.5	CR33-24A	EL180DF045E36A	9148144
ML14XC1S024-230	TXV	23400	15.1	12.5	CR33-24A	SL280DF070V36A	9148145
ML14XC1S024-230	TXV	23400	15.1	12.5	CR33-24B	EL180DF070E36B	9148146
ML14XC1S024-230	TXV	23200	15.1	12.5	CR33-24B	EL195DF045XE36B	9148147
ML14XC1S024-230	TXV	23200	15.1	12.5	CR33-24B	EL195DF070XE48B	9148148
ML14XC1S024-230	TXV	23200	15.1	12.5	CR33-24B	EL296DF045XE36B	9148149
ML14XC1S024-230	TXV	23600	15.1	12.5	CR33-24B	EL296DF045XV36B	9148150
ML14XC1S024-230	TXV	23200	15.1	12.5	CR33-24B	EL296DF070XE48B	9148151
ML14XC1S024-230	TXV	23800	14.5	12.5	CR33-24B	EL296DF070XV48B	9148152
ML14XC1S024-230	TXV	23200	15.1	12.5	CR33-24B	SLP98DF070XV36B	9148153
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36A	EL180DF045E36A	9148154
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36A	SL280DF070V36A	9148155
ML14XC1S024-230	TXV	24000	14.5	12.2	CR33-30/36A		9148156
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL180DF070E36B	9148157

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL195DF045XE36B	9148158
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL195DF070XE48B	9148159
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XE36B	9148160
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XV36B	9148161
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XE48B	9148162
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XV48B	9148163
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	SL280DF090V48B	9148164
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36B	SLP98DF070XV36B	9148165
ML14XC1S024-230	TXV	24000	14.5	12.2	CR33-30/36B		9148166
ML14XC1S024-230	TXV	24000	16	13	CR33-30/36C	SLP98DF090XV36C	9148167
ML14XC1S024-230	TXV	24000	14.5	12.2	CR33-30/36C		9148168
ML14XC1S024-230	TXV	23800	15.1	12.5	CX35-18/24A	EL180UH045E36A	9148275
ML14XC1S024-230	TXV	23800	15.1	12.5	CX35-18/24A	EL180UH045XE36A	9148276
ML14XC1S024-230	TXV	24000	16	13	CX35-24A	EL180UH045E36A	9148277
ML14XC1S024-230	TXV	24000	16	13	CX35-24A	EL180UH045XE36A	9148278
ML14XC1S024-230	TXV	24000	16	13	CX35-24A	SL280UH070V36A	9148279
ML14XC1S024-230	TXV	24000	16	13	CX35-24A	SL280UH070XV36A	9148280
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL180UH070E36B	9148281
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL180UH070XE36B	9148282
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL195UH030XE24B	9148283
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE24B	9148284
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE36B	9148285
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL195UH070XE36B	9148286
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL296UH045XE36B	9148287
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL296UH045XV36B	9148288
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL296UH070XE36B	9148289
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	EL296UH070XV36B	9148290
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	SL280UH090V36B	9148291
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	SL280UH090V48B	9148292
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	SL280UH090XV48B	9148293
ML14XC1S024-230	TXV	24000	16	13	CX35-24B	SLP98UH070XV36B	9148294
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045E36A	9148295
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045XE36A	9148296
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070V36A	9148297
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070XV36A	9148298
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070E36B	9148299
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070XE36B	9148300
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL195UH030XE24B	9148301
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL195UH045XE24B	9148302
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL195UH045XE36B	9148303
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL195UH070XE36B	9148304
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL296UH045XE36B	9148305
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL296UH045XV36B	9148306
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL296UH070XE36B	9148307
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	EL296UH070XV36B	9148308
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V36B	9148309
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V48B	9148310
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090XV48B	9148311
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36B	SLP98UH070XV36B	9148312

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36C	EL296UH090XV36C	9148313
ML14XC1S024-230	TXV	24000	16	13	CX35-30/36C	SLP98UH090XV36C	9148314
ML14XC1S024-230	TXV	24000	16	13	CX35-30A	EL180UH045E36A	9148315
ML14XC1S024-230	TXV	24000	16	13	CX35-30A	EL180UH045XE36A	9148316
ML14XC1S024-230	TXV	24000	16	13	CX35-30A	SL280UH070V36A	9148317
ML14XC1S024-230	TXV	24000	16	13	CX35-30A	SL280UH070XV36A	9148318
ML14XC1S024-230	TXV	24000	14.5	12.2	CX35-30A		9148319
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL180UH070E36B	9148320
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL180UH070XE36B	9148321
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL195UH030XE24B	9148322
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE24B	9148323
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE36B	9148324
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL195UH070XE36B	9148325
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL296UH045XE36B	9148326
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL296UH045XV36B	9148327
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL296UH070XE36B	9148328
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	EL296UH070XV36B	9148329
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	SL280UH090V36B	9148330
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	SL280UH090V48B	9148331
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	SL280UH090XV48B	9148332
ML14XC1S024-230	TXV	24000	16	13	CX35-30B	SLP98UH070XV36B	9148333
ML14XC1S024-230	TXV	24000	14.5	12.2	CX35-30B		9148334
ML14XC1S024-230	TXV	24000	16	13	CX35-36A	EL180UH045E36A	9148335
ML14XC1S024-230	TXV	24000	16	13	CX35-36A	EL180UH045XE36A	9148336
ML14XC1S024-230	TXV	24000	16	13	CX35-36A	SL280UH070V36A	9148337
ML14XC1S024-230	TXV	24000	16	13	CX35-36A	SL280UH070XV36A	9148338
ML14XC1S024-230	TXV	24000	14.5	12.2	CX35-36A		9148339
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL180UH070E36B	9148340
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL180UH070XE36B	9148341
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL195UH030XE24B	9148342
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE24B	9148343
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE36B	9148344
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL195UH070XE36B	9148345
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL296UH045XE36B	9148346
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL296UH045XV36B	9148347
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL296UH070XE36B	9148348
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	EL296UH070XV36B	9148349
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	SL280UH090V36B	9148350
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	SL280UH090V48B	9148351
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	SL280UH090XV48B	9148352
ML14XC1S024-230	TXV	24000	16	13	CX35-36B	SLP98UH070XV36B	9148353
ML14XC1S024-230	TXV	24000	14.5	12.2	CX35-36B		9148354
ML14XC1S024-230	TXV	24000	14.25	12.2	CX38-25B		10553132
ML14XC1S030-230	RFC	28600	14.25	12.2	CH33-31A		9148624
ML14XC1S030-230	RFC	28800	14.25	12.2	CH33-31B		9148638
ML14XC1S030-230	RFC	29200	14.5	12.5	CH33-43B		9148682
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-24A	EL180UH045E36A	9148478
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-24A	EL180UH045XE36A	9148479
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-24A	SL280UH070V36A	9148480

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-24A	SL280UH070XV36A	9148481
ML14XC1S030-230	TXV	28600	15.5	13	C35-24B	EL180UH070E36B	9148482
ML14XC1S030-230	TXV	28600	15.5	13	C35-24B	EL180UH070XE36B	9148483
ML14XC1S030-230	TXV	28600	15.5	13	C35-24B	EL180UH090E48B	9148484
ML14XC1S030-230	TXV	28600	15.5	13	C35-24B	EL180UH090XE48B	9148485
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-24B	EL195UH045XE36B	9148486
ML14XC1S030-230	TXV	28800	15.1	12.5	C35-24B	EL195UH070XE36B	9148487
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-24B	EL296UH045XE36B	9148488
ML14XC1S030-230	TXV	28800	15.1	12.5	C35-24B	EL296UH070XE36B	9148489
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-24B	EL296UH070XV36B	9148490
ML14XC1S030-230	TXV	28600	16	13	C35-24B	SL280UH090V36B	9148491
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-24B	SLP98UH070XV36B	9148492
ML14XC1S030-230	TXV	28400	15.5	12.5	C35-30/36A	EL180UH045E36A	9148493
ML14XC1S030-230	TXV	28400	15.5	12.5	C35-30/36A	EL180UH045XE36A	9148494
ML14XC1S030-230	TXV	28400	15.5	12.5	C35-30/36A	SL280UH070V36A	9148495
ML14XC1S030-230	TXV	28400	15.5	12.5	C35-30/36A	SL280UH070XV36A	9148496
ML14XC1S030-230	TXV	28600	15.5	13	C35-30/36B	EL180UH070E36B	9148497
ML14XC1S030-230	TXV	28600	15.5	13	C35-30/36B	EL180UH070XE36B	9148498
ML14XC1S030-230	TXV	28600	16	13	C35-30/36B	EL180UH090E48B	9148499
ML14XC1S030-230	TXV	28600	16	13	C35-30/36B	EL180UH090XE48B	9148500
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-30/36B	EL195UH045XE36B	9148501
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-30/36B	EL195UH070XE36B	9148502
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-30/36B	EL296UH045XE36B	9148503
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-30/36B	EL296UH045XV36B	9148504
ML14XC1S030-230	TXV	28600	15.1	12.5	C35-30/36B	EL296UH070XE36B	9148505
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-30/36B	EL296UH070XV36B	9148506
ML14XC1S030-230	TXV	28600	15.5	13	C35-30/36B	SL280UH090V36B	9148507
ML14XC1S030-230	TXV	28600	15.5	12.5	C35-30/36B	SLP98UH070XV36B	9148508
ML14XC1S030-230	TXV	28400	15.5	12.5	C35-30/36C	EL195UH090XE48C	9148509
ML14XC1S030-230	TXV	28400	15.5	12.5	C35-30/36C	EL296UH090XE48C	9148510
ML14XC1S030-230	TXV	28400	15.5	13	C35-30/36C	EL296UH090XV36C	9148511
ML14XC1S030-230	TXV	28400	15.5	13	C35-30/36C	SLP98UH090XV36C	9148512
ML14XC1S030-230	TXV	29200	15.5	13	C35-30A	EL180UH045E36A	9148513
ML14XC1S030-230	TXV	29200	15.5	13	C35-30A	EL180UH045XE36A	9148514
ML14XC1S030-230	TXV	29200	16	13	C35-30A	SL280UH070V36A	9148515
ML14XC1S030-230	TXV	29200	16	13	C35-30A	SL280UH070XV36A	9148516
ML14XC1S030-230	TXV	28600	14.25	12.2	C35-30A		9148517
ML14XC1S030-230	TXV	29200	16	13	C35-30B	EL180UH070E36B	9148518
ML14XC1S030-230	TXV	29200	16	13	C35-30B	EL180UH070XE36B	9148519
ML14XC1S030-230	TXV	29200	16	13	C35-30B	EL180UH090E48B	9148520
ML14XC1S030-230	TXV	29200	16	13	C35-30B	EL180UH090XE48B	9148521
ML14XC1S030-230	TXV	29200	15.5	12.5	C35-30B	EL195UH045XE36B	9148522
ML14XC1S030-230	TXV	29400	15.5	12.5	C35-30B	EL195UH070XE36B	9148523
ML14XC1S030-230	TXV	29200	15.5	12.5	C35-30B	EL296UH045XE36B	9148524
ML14XC1S030-230	TXV	29400	15.5	12.5	C35-30B	EL296UH070XE36B	9148525
ML14XC1S030-230	TXV	29200	16	13	C35-30B	EL296UH070XV36B	9148526
ML14XC1S030-230	TXV	29200	16	13	C35-30B	SL280UH090V36B	9148527
ML14XC1S030-230	TXV	29200	16	13	C35-30B	SLP98UH070XV36B	9148528
ML14XC1S030-230	TXV	29400	16	13	C35-36A	EL180UH045E36A	9148529

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	29400	16	13	C35-36A	EL180UH045XE36A	9148530
ML14XC1S030-230	TXV	29400	16	13	C35-36A	SL280UH070V36A	9148531
ML14XC1S030-230	TXV	29400	16	13	C35-36A	SL280UH070XV36A	9148532
ML14XC1S030-230	TXV	28800	14.5	12.2	C35-36A		9148533
ML14XC1S030-230	TXV	29600	16	13	C35-36B	EL180UH070E36B	9148534
ML14XC1S030-230	TXV	29600	16	13	C35-36B	EL180UH070XE36B	9148535
ML14XC1S030-230	TXV	29600	16	13	C35-36B	EL180UH090E48B	9148536
ML14XC1S030-230	TXV	29600	16	13	C35-36B	EL180UH090XE48B	9148537
ML14XC1S030-230	TXV	29400	15.5	13	C35-36B	EL195UH045XE36B	9148538
ML14XC1S030-230	TXV	29600	16	13	C35-36B	EL195UH070XE36B	9148539
ML14XC1S030-230	TXV	29400	15.5	13	C35-36B	EL296UH045XE36B	9148540
ML14XC1S030-230	TXV	29400	15.5	13	C35-36B	EL296UH045XV36B	9148541
ML14XC1S030-230	TXV	29600	16	13	C35-36B	EL296UH070XE36B	9150135
ML14XC1S030-230	TXV	29400	16	13	C35-36B	EL296UH070XV36B	9148542
ML14XC1S030-230	TXV	29400	16	13	C35-36B	SL280UH090V36B	9148543
ML14XC1S030-230	TXV	29400	16	13	C35-36B	SLP98UH070XV36B	9148544
ML14XC1S030-230	TXV	28800	14.5	12.2	C35-36B		9148545
ML14XC1S030-230	TXV	29600	16	13	C35-48B	EL180UH070E36B	9148546
ML14XC1S030-230	TXV	29600	16	13	C35-48B	EL180UH070XE36B	9148547
ML14XC1S030-230	TXV	29600	16	13	C35-48B	EL180UH090E48B	9148548
ML14XC1S030-230	TXV	29600	16	13	C35-48B	EL180UH090XE48B	9148549
ML14XC1S030-230	TXV	29400	16	13	C35-48B	EL195UH045XE36B	9148550
ML14XC1S030-230	TXV	29600	16	13	C35-48B	EL195UH070XE36B	9148551
ML14XC1S030-230	TXV	29400	16	13	C35-48B	EL296UH045XE36B	9148552
ML14XC1S030-230	TXV	29400	15.5	13	C35-48B	EL296UH045XV36B	9148553
ML14XC1S030-230	TXV	29600	16	13	C35-48B	EL296UH070XE36B	9148554
ML14XC1S030-230	TXV	29400	16	13	C35-48B	EL296UH070XV36B	9148555
ML14XC1S030-230	TXV	29400	16	13	C35-48B	SL280UH090V36B	9148556
ML14XC1S030-230	TXV	29400	16	13	C35-48B	SLP98UH070XV36B	9148557
ML14XC1S030-230	TXV	29000	14.5	12.2	C35-48B		9148558
ML14XC1S030-230	TXV	29400	16	13	C35-48C	EL195UH090XE48C	9148559
ML14XC1S030-230	TXV	29400	16	13	C35-48C	EL296UH090XE48C	9148560
ML14XC1S030-230	TXV	29400	16	13	C35-48C	EL296UH090XV36C	9148561
ML14XC1S030-230	TXV	29200	16	13	C35-48C	EL296UH090XV48C	9148562
ML14XC1S030-230	TXV	29400	16	13	C35-48C	SLP98UH090XV36C	9148563
ML14XC1S030-230	TXV	29200	16	13	C35-48C	SLP98UH090XV48C	9148564
ML14XC1S030-230	TXV	29000	14.5	12.2	C35-48C		9148565
ML14XC1S030-230	TXV	29000	16	13	CBA27UHE-030		10259437
ML14XC1S030-230	TXV	29000	16	13	CBA27UHE-036		10259438
ML14XC1S030-230	TXV	28400	14.25	12.2	CBX25UH-036		9148566
ML14XC1S030-230	TXV	28600	15.1	12.5	CBX25UHV-030		9148567
ML14XC1S030-230	TXV	28800	15.5	12.5	CBX25UHV-036		9148568
ML14XC1S030-230	TXV	29000	16	13	CBX27UH-030		9148569
ML14XC1S030-230	TXV	29000	16	13	CBX27UH-036		9148570
ML14XC1S030-230	TXV	28400	14.5	12.5	CBX32M-030		9148571
ML14XC1S030-230	TXV	28600	14.5	12.5	CBX32M-036		9148572
ML14XC1S030-230	TXV	28800	15.5	12.5	CBX32MV-036		9148573
ML14XC1S030-230	TXV	28800	15.5	12.5	CBX40UHV-030		9148574
ML14XC1S030-230	TXV	28800	15.5	13	CBX40UHV-036		9148575

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	27000	14.5	12.5	CH23-31	EL180UH070E36B	9148576
ML14XC1S030-230	TXV	27000	14.5	12.5	CH23-31	EL180UH070XE36B	9148577
ML14XC1S030-230	TXV	27000	14.5	12.2	CH23-31	EL296UH045XV36B	9148578
ML14XC1S030-230	TXV	27000	15.1	12.5	CH23-31	EL296UH070XV36B	9148579
ML14XC1S030-230	TXV	26800	15.1	12.5	CH23-31	SL280UH090V36B	9148580
ML14XC1S030-230	TXV	27000	15.1	12.5	CH23-31	SLP98UH070XV36B	9148581
ML14XC1S030-230	TXV	28600	15.5	12.5	CH23-41	EL180UH045E36A	9148582
ML14XC1S030-230	TXV	28600	15.5	12.5	CH23-41	EL180UH045XE36A	9148583
ML14XC1S030-230	TXV	28600	15.5	13	CH23-41	EL180UH070E36B	9148584
ML14XC1S030-230	TXV	28600	15.5	13	CH23-41	EL180UH070XE36B	9148585
ML14XC1S030-230	TXV	28600	16	13	CH23-41	EL180UH090E48B	9148586
ML14XC1S030-230	TXV	28600	16	13	CH23-41	EL180UH090XE48B	9148587
ML14XC1S030-230	TXV	28600	15.5	12.5	CH23-41	EL195UH045XE36B	9148588
ML14XC1S030-230	TXV	28600	15.1	12.5	CH23-41	EL195UH070XE36B	9148589
ML14XC1S030-230	TXV	28600	15.5	12.5	CH23-41	EL296UH045XE36B	9148590
ML14XC1S030-230	TXV	28400	15.5	12.5	CH23-41	EL296UH045XV36B	9148591
ML14XC1S030-230	TXV	28600	15.1	12.5	CH23-41	EL296UH070XE36B	9148592
ML14XC1S030-230	TXV	28600	15.5	12.5	CH23-41	EL296UH070XV36B	9148593
ML14XC1S030-230	TXV	28800	16	13	CH23-41	SL280UH090V36B	9148594
ML14XC1S030-230	TXV	28600	15.5	12.5	CH23-41	SLP98UH070XV36B	9148595
ML14XC1S030-230	TXV	27800	15.1	12.5	CH33-19	EL180UH045E36A	9148596
ML14XC1S030-230	TXV	27800	15.1	12.5	CH33-19	EL180UH045XE36A	9148597
ML14XC1S030-230	TXV	27800	15.1	12.5	CH33-19	SL280UH070V36A	9148598
ML14XC1S030-230	TXV	27800	15.1	12.5	CH33-19	SL280UH070XV36A	9148599
ML14XC1S030-230	TXV	27600	14.5	12.5	CH33-24/30	EL180UH045E36A	9148600
ML14XC1S030-230	TXV	27600	14.5	12.5	CH33-24/30	EL180UH045XE36A	9148601
ML14XC1S030-230	TXV	27800	15.1	12.5	CH33-24/30	SL280UH070V36A	9148602
ML14XC1S030-230	TXV	27800	15.1	12.5	CH33-24/30	SL280UH070XV36A	9148603
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-25A	EL180UH045E36A	9148604
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-25A	EL180UH045XE36A	9148605
ML14XC1S030-230	TXV	28600	15.5	12.5	CH33-25A	SL280UH070V36A	9148606
ML14XC1S030-230	TXV	28600	15.5	12.5	CH33-25A	SL280UH070XV36A	9148607
ML14XC1S030-230	TXV	28600	15.5	12.5	CH33-25B	EL180UH070E36B	9148608
ML14XC1S030-230	TXV	28600	15.5	12.5	CH33-25B	EL180UH070XE36B	9148609
ML14XC1S030-230	TXV	28600	15.5	13	CH33-25B	EL180UH090E48B	9148610
ML14XC1S030-230	TXV	28600	15.5	13	CH33-25B	EL180UH090XE48B	9148611
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-25B	EL195UH045XE36B	9148612
ML14XC1S030-230	TXV	28600	15.1	12.5	CH33-25B	EL195UH070XE36B	9148613
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-25B	EL296UH045XE36B	9148614
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-25B	EL296UH045XV36B	9148615
ML14XC1S030-230	TXV	28600	15.1	12.5	CH33-25B	EL296UH070XE36B	9148616
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-25B	EL296UH070XV36B	9148617
ML14XC1S030-230	TXV	28600	16	13	CH33-25B	SL280UH090V36B	9150361
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-25B	SLP98UH070XV36B	9148619
ML14XC1S030-230	TXV	29000	15.5	12.5	CH33-31A	EL180UH045E36A	9148620
ML14XC1S030-230	TXV	29000	15.5	12.5	CH33-31A	EL180UH045XE36A	9148621
ML14XC1S030-230	TXV	29000	15.5	13	CH33-31A	SL280UH070V36A	9148622
ML14XC1S030-230	TXV	29000	15.5	13	CH33-31A	SL280UH070XV36A	9148623
ML14XC1S030-230	TXV	28600	14.25	12.2	CH33-31A		9148625

NOTES:
 TXV = Matched with Thermostatic Expansion Valve.
 RFC = Matched with RFC metering device.
 Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.
 Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	29400	16	13	CH33-31B	EL180UH070E36B	9148626
ML14XC1S030-230	TXV	29400	16	13	CH33-31B	EL180UH070XE36B	9148627
ML14XC1S030-230	TXV	29400	16	13	CH33-31B	EL180UH090E48B	9148628
ML14XC1S030-230	TXV	29400	16	13	CH33-31B	EL180UH090XE48B	9148629
ML14XC1S030-230	TXV	29200	15.5	13	CH33-31B	EL195UH045XE36B	9148630
ML14XC1S030-230	TXV	29400	15.5	13	CH33-31B	EL195UH070XE36B	9148631
ML14XC1S030-230	TXV	29200	15.5	13	CH33-31B	EL296UH045XE36B	9148632
ML14XC1S030-230	TXV	29200	15.5	13	CH33-31B	EL296UH045XV36B	9148633
ML14XC1S030-230	TXV	29400	15.5	13	CH33-31B	EL296UH070XE36B	9148634
ML14XC1S030-230	TXV	29200	16	13	CH33-31B	EL296UH070XV36B	9148635
ML14XC1S030-230	TXV	29200	16	13	CH33-31B	SL280UH090V36B	9148636
ML14XC1S030-230	TXV	29200	16	13	CH33-31B	SLP98UH070XV36B	9148637
ML14XC1S030-230	TXV	28800	14.5	12.2	CH33-31B		9148639
ML14XC1S030-230	TXV	28200	15.1	12.5	CH33-36A	EL180UH045E36A	9148640
ML14XC1S030-230	TXV	28200	15.1	12.5	CH33-36A	EL180UH045XE36A	9148641
ML14XC1S030-230	TXV	28200	15.1	12.5	CH33-36A	SL280UH070V36A	9148642
ML14XC1S030-230	TXV	28200	15.1	12.5	CH33-36A	SL280UH070XV36A	9148643
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-36B	EL180UH070E36B	9148644
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-36B	EL180UH070XE36B	9148645
ML14XC1S030-230	TXV	28400	15.5	13	CH33-36B	EL180UH090E48B	9148646
ML14XC1S030-230	TXV	28400	15.5	13	CH33-36B	EL180UH090XE48B	9148647
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-36B	EL195UH045XE36B	9148648
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-36B	EL195UH070XE36B	9148649
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-36B	EL296UH045XE36B	9148650
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-36B	EL296UH045XV36B	9148651
ML14XC1S030-230	TXV	28400	15.1	12.5	CH33-36B	EL296UH070XE36B	9148652
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-36B	SL280UH090V36B	9148653
ML14XC1S030-230	TXV	28400	15.5	12.5	CH33-36B	SLP98UH070XV36B	9148654
ML14XC1S030-230	TXV	28600	16	13	CH33-36C	EL195UH090XE48C	9148655
ML14XC1S030-230	TXV	28600	16	13	CH33-36C	EL296UH090XE48C	9148656
ML14XC1S030-230	TXV	28600	16	13	CH33-36C	EL296UH090XV36C	9148657
ML14XC1S030-230	TXV	28600	16	13	CH33-36C	SLP98UH090XV36C	9148658
ML14XC1S030-230	TXV	29200	16	13	CH33-42	EL180UH070E36B	9148659
ML14XC1S030-230	TXV	29200	16	13	CH33-42	EL180UH070XE36B	9148660
ML14XC1S030-230	TXV	29200	16	13	CH33-42	EL180UH090E48B	9148661
ML14XC1S030-230	TXV	29200	16	13	CH33-42	EL180UH090XE48B	9148662
ML14XC1S030-230	TXV	29000	15.5	12.5	CH33-42	EL195UH045XE36B	9148663
ML14XC1S030-230	TXV	29200	15.5	12.5	CH33-42	EL195UH070XE36B	9148664
ML14XC1S030-230	TXV	29000	15.5	12.5	CH33-42	EL296UH045XE36B	9148665
ML14XC1S030-230	TXV	29000	15.5	12.5	CH33-42	EL296UH045XV36B	9148666
ML14XC1S030-230	TXV	29200	15.5	12.5	CH33-42	EL296UH070XE36B	9148667
ML14XC1S030-230	TXV	29000	15.5	13	CH33-42	EL296UH070XV36B	9148668
ML14XC1S030-230	TXV	29000	15.5	13	CH33-42	SLP98UH070XV36B	9148669
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL180UH070E36B	9148670
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL180UH070XE36B	9148671
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL180UH090E48B	9148672
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL180UH090XE48B	9148673
ML14XC1S030-230	TXV	29400	16	13	CH33-43B	EL195UH045XE36B	9148674
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL195UH070XE36B	9148675

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	29400	16	13	CH33-43B	EL296UH045XE36B	9148676
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL296UH045XV36B	9148677
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL296UH070XE36B	9148678
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	EL296UH070XV36B	9148679
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	SL280UH090V36B	9148680
ML14XC1S030-230	TXV	29600	16	13	CH33-43B	SLP98UH070XV36B	9148681
ML14XC1S030-230	TXV	29000	14.5	12.2	CH33-43B		9148683
ML14XC1S030-230	TXV	29400	16	13	CH33-43C	EL195UH090XE48C	9148684
ML14XC1S030-230	TXV	29400	16	13	CH33-43C	EL296UH090XE48C	9148685
ML14XC1S030-230	TXV	29400	16	13	CH33-43C	EL296UH090XV36C	9148686
ML14XC1S030-230	TXV	29400	16	13	CH33-43C	SLP98UH090XV36C	9148687
ML14XC1S030-230	TXV	29000	14.5	12.2	CH33-43C		9148688
ML14XC1S030-230	TXV	28600	15.5	13	CH35-24B	EL180UH070E36B	9148689
ML14XC1S030-230	TXV	29000	15.5	12.5	CH35-30A	EL180UH045E36A	9148690
ML14XC1S030-230	TXV	29000	15.5	12.5	CH35-30A	EL180UH045XE36A	9148691
ML14XC1S030-230	TXV	29200	15.5	13	CH35-30A	SL280UH070V36A	9148692
ML14XC1S030-230	TXV	29200	15.5	13	CH35-30A	SL280UH070XV36A	9148693
ML14XC1S030-230	TXV	28800	14.5	12.2	CH35-30A		9148694
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	EL180UH070E36B	9148695
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	EL180UH070XE36B	9148696
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	EL180UH090E48B	9148697
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	EL180UH090XE48B	9148698
ML14XC1S030-230	TXV	29400	15.5	13	CH35-30B	EL195UH045XE36B	9148699
ML14XC1S030-230	TXV	29600	15.5	13	CH35-30B	EL195UH070XE36B	9148700
ML14XC1S030-230	TXV	29400	15.5	13	CH35-30B	EL296UH045XE36B	9148701
ML14XC1S030-230	TXV	29400	15.5	13	CH35-30B	EL296UH045XV36B	9148702
ML14XC1S030-230	TXV	29600	15.5	13	CH35-30B	EL296UH070XE36B	9148703
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	EL296UH070XV36B	9148704
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	SL280UH090V36B	9148705
ML14XC1S030-230	TXV	29400	16	13	CH35-30B	SLP98UH070XV36B	9148706
ML14XC1S030-230	TXV	28800	14.5	12.2	CH35-30B		9148707
ML14XC1S030-230	TXV	28200	15.1	12.5	CH35-36A	EL180UH045E36A	9148708
ML14XC1S030-230	TXV	28200	15.1	12.5	CH35-36A	EL180UH045XE36A	9148709
ML14XC1S030-230	TXV	28400	15.1	12.5	CH35-36A	SL280UH070V36A	9148710
ML14XC1S030-230	TXV	28400	15.1	12.5	CH35-36A	SL280UH070XV36A	9148711
ML14XC1S030-230	TXV	28600	15.5	13	CH35-36B	EL180UH070E36B	9148712
ML14XC1S030-230	TXV	28600	15.5	13	CH35-36B	EL180UH070XE36B	9148713
ML14XC1S030-230	TXV	28600	16	13	CH35-36B	EL180UH090E48B	9148714
ML14XC1S030-230	TXV	28600	16	13	CH35-36B	EL180UH090XE48B	9148715
ML14XC1S030-230	TXV	28400	15.1	12.5	CH35-36B	EL195UH045XE36B	9148716
ML14XC1S030-230	TXV	28600	15.1	12.5	CH35-36B	EL195UH070XE36B	9148717
ML14XC1S030-230	TXV	28400	15.1	12.5	CH35-36B	EL296UH045XE36B	9148718
ML14XC1S030-230	TXV	28400	15.1	12.5	CH35-36B	EL296UH045XV36B	9148719
ML14XC1S030-230	TXV	28600	15.1	12.5	CH35-36B	EL296UH070XE36B	9148720
ML14XC1S030-230	TXV	28600	15.5	12.5	CH35-36B	EL296UH070XV36B	9148721
ML14XC1S030-230	TXV	28600	15.5	12.5	CH35-36B	SLP98UH070XV36B	9148722
ML14XC1S030-230	TXV	28600	16	13	CH35-36C	EL195UH090XE48C	9148723
ML14XC1S030-230	TXV	28600	16	13	CH35-36C	EL296UH090XE48C	9148724
ML14XC1S030-230	TXV	28600	16	13	CH35-36C	EL296UH090XV36C	9148725

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	28600	16	13	CH35-36C	SLP98UH090XV36C	9148726
ML14XC1S030-230	TXV	30000	16	13	CH35-42B	EL180UH070E36B	9148727
ML14XC1S030-230	TXV	30000	16	13	CH35-42B	EL180UH070XE36B	9148728
ML14XC1S030-230	TXV	30000	16	13	CH35-42B	EL180UH090E48B	9148729
ML14XC1S030-230	TXV	30000	16	13	CH35-42B	EL180UH090XE48B	9148730
ML14XC1S030-230	TXV	29800	16	13	CH35-42B	EL195UH045XE36B	9148731
ML14XC1S030-230	TXV	30000	16	13	CH35-42B	EL195UH070XE36B	9148732
ML14XC1S030-230	TXV	29800	16	13	CH35-42B	EL296UH045XE36B	9148733
ML14XC1S030-230	TXV	29800	16	13	CH35-42B	EL296UH045XV36B	9148734
ML14XC1S030-230	TXV	30000	16	13	CH35-42B	EL296UH070XE36B	9148735
ML14XC1S030-230	TXV	29800	16	13	CH35-42B	EL296UH070XV36B	9148736
ML14XC1S030-230	TXV	29800	16	13	CH35-42B	SL280UH090V36B	9148737
ML14XC1S030-230	TXV	29800	16	13	CH35-42B	SLP98UH070XV36B	9148738
ML14XC1S030-230	TXV	29400	14.5	12.5	CH35-42B		9148739
ML14XC1S030-230	TXV	29600	16	13	CH35-42C	EL195UH090XE48C	9148740
ML14XC1S030-230	TXV	29600	16	13	CH35-42C	EL296UH090XE48C	9148741
ML14XC1S030-230	TXV	29400	16	13	CH35-42C	EL296UH090XV36C	9148742
ML14XC1S030-230	TXV	29400	16	13	CH35-42C	SLP98UH090XV36C	9148743
ML14XC1S030-230	TXV	29000	14.5	12.2	CH35-42C		9148744
ML14XC1S030-230	TXV	27000	14.5	12.2	CR33-24A	EL180DF045E36A	9148745
ML14XC1S030-230	TXV	26800	14.5	12.2	CR33-24B	EL180DF070E36B	9148746
ML14XC1S030-230	TXV	27000	14.25	12.2	CR33-24B	EL296DF045XV36B	9148747
ML14XC1S030-230	TXV	26800	14.25	12.2	CR33-24B	SL280DF090V48B	9148748
ML14XC1S030-230	TXV	28800	15.5	12.5	CR33-30/36A	EL180DF045E36A	9148749
ML14XC1S030-230	TXV	28800	15.5	12.5	CR33-30/36A	SL280DF070V36A	9148750
ML14XC1S030-230	TXV	28800	16	13	CR33-30/36B	EL180DF070E36B	9148751
ML14XC1S030-230	TXV	28600	16	13	CR33-30/36B	EL180DF090E48B	9148752
ML14XC1S030-230	TXV	28600	15.1	12.5	CR33-30/36B	EL195DF045XE36B	9148753
ML14XC1S030-230	TXV	28800	15.5	12.5	CR33-30/36B	EL195DF070XE48B	9148754
ML14XC1S030-230	TXV	28600	15.1	12.5	CR33-30/36B	EL296DF045XE36B	9148755
ML14XC1S030-230	TXV	28800	15.5	12.5	CR33-30/36B	EL296DF045XV36B	9148756
ML14XC1S030-230	TXV	28800	15.5	12.5	CR33-30/36B	EL296DF070XE48B	9148757
ML14XC1S030-230	TXV	28600	15.5	12.5	CR33-30/36B	EL296DF070XV48B	9148758
ML14XC1S030-230	TXV	28400	15.5	12.5	CR33-30/36B	SL280DF090V48B	9148759
ML14XC1S030-230	TXV	28600	15.5	12.5	CR33-30/36B	SLP98DF070XV36B	9148760
ML14XC1S030-230	TXV	28800	16	13	CR33-30/36C	SLP98DF090XV36C	9148761
ML14XC1S030-230	TXV	28200	14.25	12	CR33-30/36C		10238963
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24A	EL180UH045E36A	9148883
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24A	EL180UH045XE36A	9148884
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24A	SL280UH070V36A	9148885
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24A	SL280UH070XV36A	9148886
ML14XC1S030-230	TXV	28600	15.5	13	CX35-24B	EL180UH070E36B	9148887
ML14XC1S030-230	TXV	28600	15.5	13	CX35-24B	EL180UH070XE36B	9148888
ML14XC1S030-230	TXV	28600	15.5	13	CX35-24B	EL180UH090E48B	9148889
ML14XC1S030-230	TXV	28600	15.5	13	CX35-24B	EL180UH090XE48B	9148890
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-24B	EL195UH045XE36B	9148891
ML14XC1S030-230	TXV	28800	15.1	12.5	CX35-24B	EL195UH070XE36B	9148892
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-24B	EL296UH045XE36B	9148893
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24B	EL296UH045XV36B	9148894

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	28800	15.1	12.5	CX35-24B	EL296UH070XE36B	9148895
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24B	EL296UH070XV36B	9148896
ML14XC1S030-230	TXV	28600	16	13	CX35-24B	SL280UH090V36B	9148897
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-24B	SLP98UH070XV36B	9148898
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-30/36A	EL180UH045E36A	9148899
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-30/36A	EL180UH045XE36A	9148900
ML14XC1S030-230	TXV	28400	15.5	12.5	CX35-30/36A	SL280UH070V36A	9148901
ML14XC1S030-230	TXV	28400	15.5	12.5	CX35-30/36A	SL280UH070XV36A	9148902
ML14XC1S030-230	TXV	28600	15.5	13	CX35-30/36B	EL180UH070E36B	9148903
ML14XC1S030-230	TXV	28600	15.5	13	CX35-30/36B	EL180UH070XE36B	9148904
ML14XC1S030-230	TXV	28600	16	13	CX35-30/36B	EL180UH090E48B	9148905
ML14XC1S030-230	TXV	28600	16	13	CX35-30/36B	EL180UH090XE48B	9148906
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL195UH045XE36B	9148907
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL195UH070XE36B	9148908
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL296UH045XE36B	9148909
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL296UH045XV36B	9148910
ML14XC1S030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL296UH070XE36B	9148911
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-30/36B	EL296UH070XV36B	9148912
ML14XC1S030-230	TXV	28600	15.5	13	CX35-30/36B	SL280UH090V36B	9148913
ML14XC1S030-230	TXV	28600	15.5	12.5	CX35-30/36B	SLP98UH070XV36B	9148914
ML14XC1S030-230	TXV	28400	15.5	12.5	CX35-30/36C	EL195UH090XE48C	9148915
ML14XC1S030-230	TXV	28400	15.5	13	CX35-30/36C	EL296UH090XE48C	9148917
ML14XC1S030-230	TXV	28400	15.5	12.5	CX35-30/36C	EL296UH090XV36C	9148916
ML14XC1S030-230	TXV	28400	15.5	13	CX35-30/36C	SLP98UH090XV36C	9148918
ML14XC1S030-230	TXV	29200	15.5	13	CX35-30A	EL180UH045E36A	9148919
ML14XC1S030-230	TXV	29200	15.5	13	CX35-30A	EL180UH045XE36A	9148920
ML14XC1S030-230	TXV	29200	16	13	CX35-30A	SL280UH070V36A	9148921
ML14XC1S030-230	TXV	29200	16	13	CX35-30A	SL280UH070XV36A	9148922
ML14XC1S030-230	TXV	28600	14.25	12.2	CX35-30A		9148923
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	EL180UH070E36B	9148924
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	EL180UH070XE36B	9148925
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	EL180UH090E48B	9148926
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	EL180UH090XE48B	9148927
ML14XC1S030-230	TXV	29200	15.5	12.5	CX35-30B	EL195UH045XE36B	9148928
ML14XC1S030-230	TXV	29400	15.5	12.5	CX35-30B	EL195UH070XE36B	9148929
ML14XC1S030-230	TXV	29200	15.5	12.5	CX35-30B	EL296UH045XE36B	9148930
ML14XC1S030-230	TXV	29200	15.5	12.5	CX35-30B	EL296UH045XV36B	9148931
ML14XC1S030-230	TXV	29400	15.5	12.5	CX35-30B	EL296UH070XE36B	9148932
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	EL296UH070XV36B	9148933
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	SL280UH090V36B	9148934
ML14XC1S030-230	TXV	29200	16	13	CX35-30B	SLP98UH070XV36B	9148935
ML14XC1S030-230	TXV	28600	14.25	12.2	CX35-30B		9148936
ML14XC1S030-230	TXV	29400	16	13	CX35-36A	EL180UH045E36A	9148937
ML14XC1S030-230	TXV	29400	16	13	CX35-36A	EL180UH045XE36A	9148938
ML14XC1S030-230	TXV	29400	16	13	CX35-36A	SL280UH070V36A	9148939
ML14XC1S030-230	TXV	29400	16	13	CX35-36A	SL280UH070XV36A	9148940
ML14XC1S030-230	TXV	28800	14.5	12.2	CX35-36A		9148941
ML14XC1S030-230	TXV	29600	16	13	CX35-36B	EL180UH070E36B	9148942
ML14XC1S030-230	TXV	29600	16	13	CX35-36B	EL180UH070XE36B	9148943

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S030-230	TXV	29600	16	13	CX35-36B	EL180UH090E48B	9148944
ML14XC1S030-230	TXV	29600	16	13	CX35-36B	EL180UH090XE48B	9148945
ML14XC1S030-230	TXV	29400	15.5	13	CX35-36B	EL195UH045XE36B	9148946
ML14XC1S030-230	TXV	29600	16	13	CX35-36B	EL195UH070XE36B	9148947
ML14XC1S030-230	TXV	29400	15.5	13	CX35-36B	EL296UH045XE36B	9148948
ML14XC1S030-230	TXV	29400	15.5	13	CX35-36B	EL296UH045XV36B	9148949
ML14XC1S030-230	TXV	29600	16	13	CX35-36B	EL296UH070XE36B	9148950
ML14XC1S030-230	TXV	29400	16	13	CX35-36B	EL296UH070XV36B	9148951
ML14XC1S030-230	TXV	29400	16	13	CX35-36B	SL280UH090V36B	9148952
ML14XC1S030-230	TXV	29400	16	13	CX35-36B	SLP98UH070XV36B	9148953
ML14XC1S030-230	TXV	28800	14.5	12.2	CX35-36B		9148954
ML14XC1S030-230	TXV	29600	16	13	CX35-48B	EL180UH070E36B	9148955
ML14XC1S030-230	TXV	29600	16	13	CX35-48B	EL180UH070XE36B	9148956
ML14XC1S030-230	TXV	29600	16	13	CX35-48B	EL180UH090E48B	9148957
ML14XC1S030-230	TXV	29600	16	13	CX35-48B	EL180UH090XE48B	9148958
ML14XC1S030-230	TXV	29400	16	13	CX35-48B	EL195UH045XE36B	9148959
ML14XC1S030-230	TXV	29600	16	13	CX35-48B	EL195UH070XE36B	9148960
ML14XC1S030-230	TXV	29400	16	13	CX35-48B	EL296UH045XE36B	9148961
ML14XC1S030-230	TXV	29400	15.5	13	CX35-48B	EL296UH045XV36B	9148962
ML14XC1S030-230	TXV	29600	16	13	CX35-48B	EL296UH070XE36B	9148963
ML14XC1S030-230	TXV	29400	16	13	CX35-48B	EL296UH070XV36B	9148964
ML14XC1S030-230	TXV	29400	16	13	CX35-48B	SL280UH090V36B	9148965
ML14XC1S030-230	TXV	29400	16	13	CX35-48B	SLP98UH070XV36B	9148966
ML14XC1S030-230	TXV	29000	14.5	12.2	CX35-48B		9148967
ML14XC1S030-230	TXV	29400	16	13	CX35-48C	EL195UH090XE48C	9148968
ML14XC1S030-230	TXV	29400	16	13	CX35-48C	EL296UH090XE48C	9148969
ML14XC1S030-230	TXV	29400	16	13	CX35-48C	EL296UH090XV36C	9148970
ML14XC1S030-230	TXV	29200	16	13	CX35-48C	EL296UH090XV48C	9148971
ML14XC1S030-230	TXV	29400	16	13	CX35-48C	SLP98UH090XV36C	9148972
ML14XC1S030-230	TXV	29200	16	13	CX35-48C	SLP98UH090XV48C	9148973
ML14XC1S030-230	TXV	29000	14.5	12.2	CX35-48C		9148974
ML14XC1S030-230	TXV	28600	14.25	12.2	CX38-31B		10553387
ML14XC1S036-230	RFC	34200	14.25	12.2	CH33-31B		9149374
ML14XC1S036-230	RFC	35000	14.5	12.2	CH33-43B		9149438
ML14XC1S036-230	RFC	34200	14.25	12.2	CH33-44/48B		9149472
ML14XC1S036-230	RFC	34400	14.25	12.2	CH33-48		9149492
ML14XC1S036-230	RFC	34800	14.5	12.2	CH33-49		9149512
ML14XC1S036-230	RFC	34600	14.5	12.2	CH33-50/60C		9149532
ML14XC1S036-230	TXV	33600	15.1	12.2	C35-30/36A	EL180UH045E36A	9149156
ML14XC1S036-230	TXV	33600	15.1	12.2	C35-30/36A	EL180UH045XE36A	9149157
ML14XC1S036-230	TXV	33400	15.1	12.5	C35-30/36A	SL280UH070V36A	9149158
ML14XC1S036-230	TXV	33400	15.1	12.5	C35-30/36A	SL280UH070XV36A	9149159
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36B	EL180UH070E36B	9149160
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36B	EL180UH070XE36B	9149161
ML14XC1S036-230	TXV	34000	15.5	12.5	C35-30/36B	EL180UH090E48B	9149162
ML14XC1S036-230	TXV	34000	15.5	12.5	C35-30/36B	EL180UH090XE48B	9149163
ML14XC1S036-230	TXV	33200	15.1	12.5	C35-30/36B	EL195UH045XE36B	9149164
ML14XC1S036-230	TXV	33200	15.1	12.5	C35-30/36B	EL296UH045XE36B	9149165
ML14XC1S036-230	TXV	33200	15.1	12.2	C35-30/36B	EL296UH045XV36B	9149166

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	33400	15.1	12.5	C35-30/36B	EL296UH070XV36B	9149167
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090V36B	9149168
ML14XC1S036-230	TXV	33800	15.5	12.5	C35-30/36B	SL280UH090V48B	9149169
ML14XC1S036-230	TXV	33800	15.5	12.5	C35-30/36B	SL280UH090XV48B	9149170
ML14XC1S036-230	TXV	33400	15.1	12.5	C35-30/36B	SLP98UH070XV36B	9149171
ML14XC1S036-230	TXV	34000	15.5	12.5	C35-30/36C	EL180UH090E60C	9149172
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36C	EL180UH110E60C	9149173
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36C	EL180UH110XE60C	9149174
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36C	EL195UH090XE48C	9149175
ML14XC1S036-230	TXV	34000	15.5	12.5	C35-30/36C	EL195UH110XE60C	9149176
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH090XE48C	9149177
ML14XC1S036-230	TXV	33800	15.5	12.5	C35-30/36C	EL296UH090XV36C	9149178
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH090XV48C	9149179
ML14XC1S036-230	TXV	34000	15.5	12.5	C35-30/36C	EL296UH110XE60C	9149180
ML14XC1S036-230	TXV	33800	15.5	12.5	C35-30/36C	EL296UH110XV48C	9149181
ML14XC1S036-230	TXV	33800	15.5	12.5	C35-30/36C	SLP98UH090XV36C	9149182
ML14XC1S036-230	TXV	33600	15.5	12.5	C35-30/36C	SLP98UH090XV48C	9149183
ML14XC1S036-230	TXV	34000	15.5	12.5	C35-30/36C	SLP98UH110XV60C	9149184
ML14XC1S036-230	TXV	34800	15.5	12.5	C35-30A	EL180UH045E36A	9149185
ML14XC1S036-230	TXV	34800	15.5	12.5	C35-30A	EL180UH045XE36A	9149186
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-30A	SL280UH070V36A	9149187
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-30A	SL280UH070XV36A	9149188
ML14XC1S036-230	TXV	34400	16	13	C35-30B	EL180UH070E36B	9149189
ML14XC1S036-230	TXV	34400	16	13	C35-30B	EL180UH070XE36B	9149190
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-30B	EL180UH090E48B	9149191
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-30B	EL180UH090XE48B	9149192
ML14XC1S036-230	TXV	34400	14.5	12.2	C35-30B	EL195UH045XE36B	9149193
ML14XC1S036-230	TXV	34400	15.5	12.5	C35-30B	EL195UH070XE36B	9149194
ML14XC1S036-230	TXV	34400	14.5	12.2	C35-30B	EL296UH045XE36B	9149195
ML14XC1S036-230	TXV	34600	15.1	12.5	C35-30B	EL296UH045XV36B	9149196
ML14XC1S036-230	TXV	34400	15.5	12.5	C35-30B	EL296UH070XE36B	9149197
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-30B	EL296UH070XV36B	9149198
ML14XC1S036-230	TXV	34800	16	13	C35-30B	SL280UH090V36B	9149199
ML14XC1S036-230	TXV	34800	16	13	C35-30B	SL280UH090V48B	9149200
ML14XC1S036-230	TXV	34800	16	13	C35-30B	SL280UH090XV48B	9149201
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-30B	SLP98UH070XV36B	9149202
ML14XC1S036-230	TXV	35200	15.5	12.5	C35-36A	EL180UH045E36A	9149203
ML14XC1S036-230	TXV	35200	15.5	12.5	C35-36A	EL180UH045XE36A	9149204
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36A	SL280UH070V36A	9149205
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36A	SL280UH070XV36A	9149206
ML14XC1S036-230	TXV	34600	14.5	12.2	C35-36A		9149207
ML14XC1S036-230	TXV	35000	16	13	C35-36B	EL180UH070E36B	9149208
ML14XC1S036-230	TXV	35000	16	13	C35-36B	EL180UH070XE36B	9149209
ML14XC1S036-230	TXV	35400	16	13	C35-36B	EL180UH090E48B	9149210
ML14XC1S036-230	TXV	35400	16	13	C35-36B	EL180UH090XE48B	9149211
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-36B	EL195UH045XE36B	9149212
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36B	EL195UH070XE36B	9149213
ML14XC1S036-230	TXV	34600	15.5	12.5	C35-36B	EL296UH045XE36B	9149214
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36B	EL296UH045XV36B	9149215

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36B	EL296UH070XE36B	9149216
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36B	EL296UH070XV36B	9149217
ML14XC1S036-230	TXV	35200	16	13	C35-36B	SL280UH090V36B	9149218
ML14XC1S036-230	TXV	35200	16	13	C35-36B	SL280UH090V48B	9149219
ML14XC1S036-230	TXV	35200	16	13	C35-36B	SL280UH090XV48B	9149220
ML14XC1S036-230	TXV	35000	15.5	12.5	C35-36B	SLP98UH070XV36B	9149221
ML14XC1S036-230	TXV	34600	14.5	12.2	C35-36B		9149222
ML14XC1S036-230	TXV	35200	16	13	C35-48B	EL180UH070E36B	9149223
ML14XC1S036-230	TXV	35200	16	13	C35-48B	EL180UH070XE36B	9149224
ML14XC1S036-230	TXV	35600	16	13	C35-48B	EL180UH090E48B	9149225
ML14XC1S036-230	TXV	35600	16	13	C35-48B	EL180UH090XE48B	9149226
ML14XC1S036-230	TXV	34800	15.5	12.5	C35-48B	EL195UH045XE36B	9149227
ML14XC1S036-230	TXV	35200	16	13	C35-48B	EL195UH070XE36B	9149228
ML14XC1S036-230	TXV	34800	15.5	12.5	C35-48B	EL296UH045XE36B	9149229
ML14XC1S036-230	TXV	35200	15.5	12.5	C35-48B	EL296UH045XV36B	9149230
ML14XC1S036-230	TXV	35200	16	13	C35-48B	EL296UH070XE36B	9149231
ML14XC1S036-230	TXV	35200	15.5	12.5	C35-48B	EL296UH070XV36B	9149232
ML14XC1S036-230	TXV	35400	16	13	C35-48B	SL280UH090V36B	9149233
ML14XC1S036-230	TXV	35400	16	13	C35-48B	SL280UH090V48B	9149234
ML14XC1S036-230	TXV	35400	16	13	C35-48B	SL280UH090XV48B	9149235
ML14XC1S036-230	TXV	35200	15.5	12.5	C35-48B	SLP98UH070XV36B	9149236
ML14XC1S036-230	TXV	34800	14.5	12.2	C35-48B		9149237
ML14XC1S036-230	TXV	35600	16	13	C35-48C	EL180UH090E60C	9149238
ML14XC1S036-230	TXV	35200	16	13	C35-48C	EL180UH110E60C	9149239
ML14XC1S036-230	TXV	35200	16	13	C35-48C	EL180UH110XE60C	9149240
ML14XC1S036-230	TXV	35400	16	13	C35-48C	EL195UH090XE48C	9149241
ML14XC1S036-230	TXV	35600	16	13	C35-48C	EL195UH110XE60C	9149242
ML14XC1S036-230	TXV	35400	16	13	C35-48C	EL296UH090XE48C	9149243
ML14XC1S036-230	TXV	35400	16	13	C35-48C	EL296UH090XV36C	9149244
ML14XC1S036-230	TXV	35200	16	13	C35-48C	EL296UH090XV48C	9149245
ML14XC1S036-230	TXV	35600	16	13	C35-48C	EL296UH110XE60C	9149246
ML14XC1S036-230	TXV	35400	16	13	C35-48C	EL296UH110XV48C	9149247
ML14XC1S036-230	TXV	35800	16	13	C35-48C	EL296UH110XV60C	9149248
ML14XC1S036-230	TXV	35800	16	13	C35-48C	SL280UH090V60C	9149249
ML14XC1S036-230	TXV	35800	16	13	C35-48C	SL280UH090XV60C	9149250
ML14XC1S036-230	TXV	35800	16	13	C35-48C	SL280UH110V60C	9149251
ML14XC1S036-230	TXV	35800	16	13	C35-48C	SL280UH110XV60C	9149252
ML14XC1S036-230	TXV	35400	16	13	C35-48C	SLP98UH090XV36C	9149253
ML14XC1S036-230	TXV	35200	16	13	C35-48C	SLP98UH090XV48C	9149254
ML14XC1S036-230	TXV	35800	16	13	C35-48C	SLP98UH110XV60C	9149255
ML14XC1S036-230	TXV	34800	14.5	12.2	C35-48C		9149256
ML14XC1S036-230	TXV	36000	16	13	C35-49C	EL180UH090E60C	9149257
ML14XC1S036-230	TXV	35600	16	13	C35-49C	EL180UH110E60C	9149258
ML14XC1S036-230	TXV	35600	16	13	C35-49C	EL180UH110XE60C	9149259
ML14XC1S036-230	TXV	35600	16	13	C35-49C	EL195UH090XE48C	9149260
ML14XC1S036-230	TXV	36000	16	13	C35-49C	EL195UH110XE60C	9149261
ML14XC1S036-230	TXV	35600	16	13	C35-49C	EL296UH090XE48C	9149262
ML14XC1S036-230	TXV	35800	16	13	C35-49C	EL296UH090XV36C	9149263
ML14XC1S036-230	TXV	35600	16	13	C35-49C	EL296UH090XV48C	9149264

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	36000	16	13	C35-49C	EL296UH110XE60C	9149265
ML14XC1S036-230	TXV	35800	16	13	C35-49C	EL296UH110XV48C	9149266
ML14XC1S036-230	TXV	36000	16	13	C35-49C	EL296UH110XV60C	9149267
ML14XC1S036-230	TXV	36000	16	13	C35-49C	SL280UH090V60C	9149268
ML14XC1S036-230	TXV	36000	16	13	C35-49C	SL280UH090XV60C	9149269
ML14XC1S036-230	TXV	36000	16	13	C35-49C	SL280UH110V60C	9149270
ML14XC1S036-230	TXV	36000	16	13	C35-49C	SL280UH110XV60C	9149271
ML14XC1S036-230	TXV	35800	16	13	C35-49C	SLP98UH090XV36C	9149272
ML14XC1S036-230	TXV	35600	16	13	C35-49C	SLP98UH090XV48C	9149273
ML14XC1S036-230	TXV	36000	16	13	C35-49C	SLP98UH110XV60C	9149274
ML14XC1S036-230	TXV	35200	14.5	12.2	C35-49C		9149275
ML14XC1S036-230	TXV	35400	16	13	C35-50/60C	EL180UH090E60C	9149276
ML14XC1S036-230	TXV	35000	16	13	C35-50/60C	EL180UH110E60C	9149277
ML14XC1S036-230	TXV	35000	16	13	C35-50/60C	EL180UH110XE60C	9149278
ML14XC1S036-230	TXV	35200	16	13	C35-50/60C	EL195UH090XE48C	9149279
ML14XC1S036-230	TXV	35400	16	13	C35-50/60C	EL195UH110XE60C	9149280
ML14XC1S036-230	TXV	35200	16	13	C35-50/60C	EL296UH090XE48C	9149281
ML14XC1S036-230	TXV	35200	16	13	C35-50/60C	EL296UH090XV36C	9149282
ML14XC1S036-230	TXV	35000	16	13	C35-50/60C	EL296UH090XV48C	9149283
ML14XC1S036-230	TXV	35400	16	13	C35-50/60C	EL296UH110XE60C	9149284
ML14XC1S036-230	TXV	35200	16	13	C35-50/60C	EL296UH110XV48C	9149285
ML14XC1S036-230	TXV	35600	16	13	C35-50/60C	EL296UH110XV60C	9149286
ML14XC1S036-230	TXV	35600	16	13	C35-50/60C	SL280UH090V60C	9149287
ML14XC1S036-230	TXV	35600	16	13	C35-50/60C	SL280UH090XV60C	9149288
ML14XC1S036-230	TXV	35400	16	13	C35-50/60C	SL280UH110V60C	9149289
ML14XC1S036-230	TXV	35400	16	13	C35-50/60C	SL280UH110XV60C	9149290
ML14XC1S036-230	TXV	35200	16	13	C35-50/60C	SLP98UH090XV36C	9149291
ML14XC1S036-230	TXV	35000	16	13	C35-50/60C	SLP98UH090XV48C	9149292
ML14XC1S036-230	TXV	35600	16	13	C35-50/60C	SLP98UH110XV60C	9149293
ML14XC1S036-230	TXV	34600	14.5	12.2	C35-50/60C		9149294
ML14XC1S036-230	TXV	34600	16	13	CBA27UHE-036		10259439
ML14XC1S036-230	TXV	35400	16	13	CBA27UHE-042		10259440
ML14XC1S036-230	TXV	34600	15.1	12.5	CBX25UH-042		9149295
ML14XC1S036-230	TXV	33800	15.1	12.5	CBX25UHV-036		9149296
ML14XC1S036-230	TXV	35000	16	13	CBX25UHV-042		9149297
ML14XC1S036-230	TXV	34400	16	13	CBX27UH-036		9149298
ML14XC1S036-230	TXV	35200	16	13	CBX27UH-042		9149299
ML14XC1S036-230	TXV	33800	15.1	12.5	CBX32M-030		9149300
ML14XC1S036-230	TXV	34000	14.5	12.2	CBX32M-036		9149301
ML14XC1S036-230	TXV	34000	14.5	12.2	CBX32M-042		9149302
ML14XC1S036-230	TXV	34600	15	12.5	CBX32M-048		9149303
ML14XC1S036-230	TXV	34200	15.1	12.5	CBX32MV-036		9149304
ML14XC1S036-230	TXV	35200	16	13	CBX32MV-048		9149305
ML14XC1S036-230	TXV	34400	15.5	12.5	CBX40UHV-036		9149306
ML14XC1S036-230	TXV	35000	16	13	CBX40UHV-042		9149307
ML14XC1S036-230	TXV	35200	16	13	CBX40UHV-048		9149308
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	EL180UH045E36A	9149309
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	EL180UH045XE36A	9149310
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070E36B	9149311

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070XE36B	9149312
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090E48B	9149313
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090XE48B	9149314
ML14XC1S036-230	TXV	33400	15.1	12.5	CH23-41	EL195UH045XE36B	9149315
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	EL195UH070XE36B	9149316
ML14XC1S036-230	TXV	33400	15.1	12.5	CH23-41	EL296UH045XE36B	9149317
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH045XV36B	9149318
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH070XE36B	9149319
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH070XV36B	9149320
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-41	SL280UH090V48B	9149321
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-41	SL280UH090XV48B	9149322
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-41	SLP98UH070XV36B	9149323
ML14XC1S036-230	TXV	33600	15.1	12.2	CH23-51	EL180UH045E36A	9149324
ML14XC1S036-230	TXV	33600	15.1	12.2	CH23-51	EL180UH045XE36A	9149325
ML14XC1S036-230	TXV	33800	16	13	CH23-51	EL180UH070E36B	9149326
ML14XC1S036-230	TXV	33800	16	13	CH23-51	EL180UH070XE36B	9149327
ML14XC1S036-230	TXV	34200	15.5	12.5	CH23-51	EL180UH090E48B	9149328
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH090E60C	9149329
ML14XC1S036-230	TXV	34200	15.5	12.5	CH23-51	EL180UH090XE48B	9149330
ML14XC1S036-230	TXV	34000	16	13	CH23-51	EL180UH110E60C	9149331
ML14XC1S036-230	TXV	34000	16	13	CH23-51	EL180UH110XE60C	9149332
ML14XC1S036-230	TXV	33400	15.1	12.5	CH23-51	EL195UH045XE36B	9149333
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-51	EL195UH070XE36B	9149334
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	EL195UH090XE48C	9149335
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	EL195UH110XE60C	9149336
ML14XC1S036-230	TXV	33400	15.1	12.5	CH23-51	EL296UH045XE36B	9149337
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH045XV36B	9149338
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH070XE36B	9149339
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH070XV36B	9149340
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH090XE48C	9149341
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-51	EL296UH090XV36C	9149342
ML14XC1S036-230	TXV	33600	15.5	12.5	CH23-51	EL296UH090XV48C	9149343
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH110XE60C	9149344
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-51	EL296UH110XV48C	9149345
ML14XC1S036-230	TXV	34200	15.5	12.5	CH23-51	EL296UH110XV60C	9149346
ML14XC1S036-230	TXV	33800	16	13	CH23-51	SL280UH090V36B	9149347
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-51	SL280UH090V48B	9149348
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-51	SL280UH090XV48B	9149349
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	SL280UH110V60C	9149350
ML14XC1S036-230	TXV	34000	15.5	12.5	CH23-51	SL280UH110XV60C	9149351
ML14XC1S036-230	TXV	33600	15.1	12.5	CH23-51	SLP98UH070XV36B	9149352
ML14XC1S036-230	TXV	33800	15.5	12.5	CH23-51	SLP98UH090XV36C	9149353
ML14XC1S036-230	TXV	33600	15.5	12.5	CH23-51	SLP98UH090XV48C	9149354
ML14XC1S036-230	TXV	34200	15.5	12.5	CH23-51	SLP98UH110XV60C	9149355
ML14XC1S036-230	TXV	34400	15.1	12.5	CH33-31A	EL180UH045E36A	9149356
ML14XC1S036-230	TXV	34400	15.1	12.5	CH33-31A	EL180UH045XE36A	9149357
ML14XC1S036-230	TXV	34600	15.1	12.5	CH33-31A	SL280UH070V36A	9149358
ML14XC1S036-230	TXV	34600	15.1	12.5	CH33-31A	SL280UH070XV36A	9149359
ML14XC1S036-230	TXV	34600	16	13	CH33-31B	EL180UH070E36B	9149360

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	34600	16	13	CH33-31B	EL180UH070XE36B	9149361
ML14XC1S036-230	TXV	34800	16	13	CH33-31B	EL180UH090E48B	9149362
ML14XC1S036-230	TXV	34800	16	13	CH33-31B	EL180UH090XE48B	9149363
ML14XC1S036-230	TXV	34600	15.1	12.2	CH33-31B	EL195UH045XE36B	9149364
ML14XC1S036-230	TXV	34600	15.5	12.5	CH33-31B	EL195UH070XE36B	9149365
ML14XC1S036-230	TXV	34600	15.1	12.2	CH33-31B	EL296UH045XE36B	9149366
ML14XC1S036-230	TXV	34800	15.5	12.5	CH33-31B	EL296UH045XV36B	9149367
ML14XC1S036-230	TXV	34600	15.5	12.5	CH33-31B	EL296UH070XE36B	9149368
ML14XC1S036-230	TXV	34800	15.5	12.5	CH33-31B	EL296UH070XV36B	9149369
ML14XC1S036-230	TXV	35000	16	13	CH33-31B	SL280UH090V36B	9149370
ML14XC1S036-230	TXV	35000	16	13	CH33-31B	SL280UH090V48B	9149371
ML14XC1S036-230	TXV	35000	16	13	CH33-31B	SL280UH090XV48B	9149372
ML14XC1S036-230	TXV	34800	15.5	12.5	CH33-31B	SLP98UH070XV36B	9149373
ML14XC1S036-230	TXV	34400	14.5	12.2	CH33-31B		9149375
ML14XC1S036-230	TXV	33400	14.5	12.2	CH33-36A	EL180UH045E36A	9149376
ML14XC1S036-230	TXV	33400	14.5	12.2	CH33-36A	EL180UH045XE36A	9149377
ML14XC1S036-230	TXV	33400	14.5	12.2	CH33-36A	SL280UH070V36A	9149378
ML14XC1S036-230	TXV	33400	14.5	12.2	CH33-36A	SL280UH070XV36A	9149379
ML14XC1S036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070E36B	9149380
ML14XC1S036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070XE36B	9149381
ML14XC1S036-230	TXV	33600	15.5	12.5	CH33-36B	EL180UH090E48B	9149382
ML14XC1S036-230	TXV	33600	15.5	12.5	CH33-36B	EL180UH090XE48B	9149383
ML14XC1S036-230	TXV	33000	14.5	12.2	CH33-36B	EL195UH045XE36B	9149384
ML14XC1S036-230	TXV	33200	15.1	12.5	CH33-36B	EL195UH070XE36B	9149385
ML14XC1S036-230	TXV	33000	14.5	12.2	CH33-36B	EL296UH045XE36B	9149386
ML14XC1S036-230	TXV	33400	14.5	12.2	CH33-36B	EL296UH045XV36B	9149387
ML14XC1S036-230	TXV	33200	15.1	12.5	CH33-36B	EL296UH070XE36B	9149388
ML14XC1S036-230	TXV	33200	15.1	12.5	CH33-36B	EL296UH070XV36B	9149389
ML14XC1S036-230	TXV	33400	15.5	12.5	CH33-36B	SL280UH090V36B	9149390
ML14XC1S036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090V48B	9149391
ML14XC1S036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090XV48B	9149392
ML14XC1S036-230	TXV	33200	15.1	12.5	CH33-36B	SLP98UH070XV36B	9149393
ML14XC1S036-230	TXV	34200	16	13	CH33-36C	EL180UH090E60C	9149394
ML14XC1S036-230	TXV	34000	16	13	CH33-36C	EL180UH110E60C	9149395
ML14XC1S036-230	TXV	34000	16	13	CH33-36C	EL180UH110XE60C	9149396
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	EL195UH090XE48C	9149397
ML14XC1S036-230	TXV	34200	15.5	12.5	CH33-36C	EL195UH110XE60C	9149398
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XE48C	9149399
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XV36C	9149400
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XV48C	9149401
ML14XC1S036-230	TXV	34200	15.5	12.5	CH33-36C	EL296UH110XE60C	9149402
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH110XV48C	9149403
ML14XC1S036-230	TXV	34400	15.5	12.5	CH33-36C	EL296UH110XV60C	9149404
ML14XC1S036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH110V60C	9149405
ML14XC1S036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH110XV60C	9149406
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	SLP98UH090XV36C	9149407
ML14XC1S036-230	TXV	34000	15.5	12.5	CH33-36C	SLP98UH090XV48C	9149408
ML14XC1S036-230	TXV	34400	15.5	12.5	CH33-36C	SLP98UH110XV60C	9149409
ML14XC1S036-230	TXV	34200	16	13	CH33-42B	EL180UH070E36B	9149410

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	34200	16	13	CH33-42B	EL180UH070XE36B	9149411
ML14XC1S036-230	TXV	34400	15.5	12.5	CH33-42B	EL180UH090E48B	9149412
ML14XC1S036-230	TXV	34400	15.5	12.5	CH33-42B	EL180UH090XE48B	9149413
ML14XC1S036-230	TXV	34200	14.5	12.2	CH33-42B	EL195UH045XE36B	9149414
ML14XC1S036-230	TXV	34000	15.1	12.5	CH33-42B	EL195UH070XE36B	9149415
ML14XC1S036-230	TXV	34200	14.5	12.2	CH33-42B	EL296UH045XE36B	9149416
ML14XC1S036-230	TXV	34400	15.1	12.5	CH33-42B	EL296UH045XV36B	9149417
ML14XC1S036-230	TXV	34000	15.1	12.5	CH33-42B	EL296UH070XE36B	9149418
ML14XC1S036-230	TXV	34400	15.1	12.5	CH33-42B	EL296UH070XV36B	9149419
ML14XC1S036-230	TXV	34600	16	13	CH33-42B	SL280UH090V36B	9149420
ML14XC1S036-230	TXV	34600	15.5	12.5	CH33-42B	SL280UH090V48B	9149421
ML14XC1S036-230	TXV	34600	15.5	12.5	CH33-42B	SL280UH090XV48B	9149422
ML14XC1S036-230	TXV	34400	15.1	12.5	CH33-42B	SLP98UH070XV36B	9149423
ML14XC1S036-230	TXV	35600	16	13	CH33-43B	EL180UH070E36B	9149424
ML14XC1S036-230	TXV	35600	16	13	CH33-43B	EL180UH070XE36B	9149425
ML14XC1S036-230	TXV	35800	16	13	CH33-43B	EL180UH090E48B	9149426
ML14XC1S036-230	TXV	35800	16	13	CH33-43B	EL180UH090XE48B	9149427
ML14XC1S036-230	TXV	35600	15.5	12.5	CH33-43B	EL195UH045XE36B	9149428
ML14XC1S036-230	TXV	35400	16	13	CH33-43B	EL195UH070XE36B	9149429
ML14XC1S036-230	TXV	35600	15.5	12.5	CH33-43B	EL296UH045XE36B	9149430
ML14XC1S036-230	TXV	35800	16	13	CH33-43B	EL296UH045XV36B	9149431
ML14XC1S036-230	TXV	35400	16	13	CH33-43B	EL296UH070XE36B	9149432
ML14XC1S036-230	TXV	35800	16	13	CH33-43B	EL296UH070XV36B	9149433
ML14XC1S036-230	TXV	36000	16	13	CH33-43B	SL280UH090V36B	9149434
ML14XC1S036-230	TXV	36000	16	13	CH33-43B	SL280UH090V48B	9149435
ML14XC1S036-230	TXV	36000	16	13	CH33-43B	SL280UH090XV48B	9149436
ML14XC1S036-230	TXV	35800	16	13	CH33-43B	SLP98UH070XV36B	9149437
ML14XC1S036-230	TXV	35400	15.1	12.5	CH33-43B		9149439
ML14XC1S036-230	TXV	35600	16	13	CH33-43C	EL180UH090E60C	9149440
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	EL180UH110E60C	9149441
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	EL180UH110XE60C	9149442
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	EL195UH090XE48C	9149443
ML14XC1S036-230	TXV	35600	16	13	CH33-43C	EL195UH110XE60C	9149444
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	EL296UH090XE48C	9149445
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	EL296UH090XV36C	9149446
ML14XC1S036-230	TXV	35200	16	13	CH33-43C	EL296UH090XV48C	9149447
ML14XC1S036-230	TXV	35600	16	13	CH33-43C	EL296UH110XE60C	9149448
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	EL296UH110XV48C	9149449
ML14XC1S036-230	TXV	35800	16	13	CH33-43C	EL296UH110XV60C	9149450
ML14XC1S036-230	TXV	35800	16	13	CH33-43C	SL280UH090V60C	9149451
ML14XC1S036-230	TXV	35800	16	13	CH33-43C	SL280UH090XV60C	9149452
ML14XC1S036-230	TXV	35600	16	13	CH33-43C	SL280UH110V60C	9149453
ML14XC1S036-230	TXV	35600	16	13	CH33-43C	SL280UH110XV60C	9149454
ML14XC1S036-230	TXV	35400	16	13	CH33-43C	SLP98UH090XV36C	9149455
ML14XC1S036-230	TXV	35200	16	13	CH33-43C	SLP98UH090XV48C	9149456
ML14XC1S036-230	TXV	35800	16	13	CH33-43C	SLP98UH110XV60C	9149457
ML14XC1S036-230	TXV	34600	16	13	CH33-44/48B	EL180UH070E36B	9149458
ML14XC1S036-230	TXV	34600	16	13	CH33-44/48B	EL180UH070XE36B	9149459
ML14XC1S036-230	TXV	35000	16	13	CH33-44/48B	EL180UH090E48B	9149460

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	35000	16	13	CH33-44/48B	EL180UH090XE48B	9149461
ML14XC1S036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL195UH045XE36B	9149462
ML14XC1S036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL195UH070XE36B	9149463
ML14XC1S036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL296UH045XE36B	9149464
ML14XC1S036-230	TXV	34800	15.5	12.5	CH33-44/48B	EL296UH045XV36B	9149465
ML14XC1S036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL296UH070XE36B	9149466
ML14XC1S036-230	TXV	35000	15.5	12.5	CH33-44/48B	EL296UH070XV36B	9149467
ML14XC1S036-230	TXV	35000	16	13	CH33-44/48B	SL280UH090V36B	9149468
ML14XC1S036-230	TXV	35000	16	13	CH33-44/48B	SL280UH090V48B	9149469
ML14XC1S036-230	TXV	35000	16	13	CH33-44/48B	SL280UH090XV48B	9149470
ML14XC1S036-230	TXV	35000	15.5	12.5	CH33-44/48B	SLP98UH070XV36B	9149471
ML14XC1S036-230	TXV	34600	14.5	12.2	CH33-44/48B		9149473
ML14XC1S036-230	TXV	35400	16	13	CH33-48C	EL180UH090E60C	9149474
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	EL180UH110E60C	9149475
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	EL180UH110XE60C	9149476
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	EL195UH090XE48C	9149477
ML14XC1S036-230	TXV	35400	16	13	CH33-48C	EL195UH110XE60C	9149478
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	EL296UH090XE48C	9149479
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	EL296UH090XV36C	9149480
ML14XC1S036-230	TXV	35000	16	13	CH33-48C	EL296UH090XV48C	9149481
ML14XC1S036-230	TXV	35400	16	13	CH33-48C	EL296UH110XE60C	9149482
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	EL296UH110XV48C	9149483
ML14XC1S036-230	TXV	35600	16	13	CH33-48C	EL296UH110XV60C	9149484
ML14XC1S036-230	TXV	35600	16	13	CH33-48C	SL280UH090V60C	9149485
ML14XC1S036-230	TXV	35600	16	13	CH33-48C	SL280UH090XV60C	9149486
ML14XC1S036-230	TXV	35400	16	13	CH33-48C	SL280UH110V60C	9149487
ML14XC1S036-230	TXV	35400	16	13	CH33-48C	SL280UH110XV60C	9149488
ML14XC1S036-230	TXV	35200	16	13	CH33-48C	SLP98UH090XV36C	9149489
ML14XC1S036-230	TXV	35000	16	13	CH33-48C	SLP98UH090XV48C	9149490
ML14XC1S036-230	TXV	35600	16	13	CH33-48C	SLP98UH110XV60C	9149491
ML14XC1S036-230	TXV	34600	14.5	12.2	CH33-48C		9149493
ML14XC1S036-230	TXV	36000	16	13	CH33-49	EL180UH090E60C	9149494
ML14XC1S036-230	TXV	35800	16	13	CH33-49	EL180UH110E60C	9149495
ML14XC1S036-230	TXV	35800	16	13	CH33-49	EL180UH110XE60C	9149496
ML14XC1S036-230	TXV	35800	16	13	CH33-49	EL195UH090XE48C	9149497
ML14XC1S036-230	TXV	36000	16	13	CH33-49	EL195UH110XE60C	9149498
ML14XC1S036-230	TXV	35800	16	13	CH33-49	EL296UH090XE48C	9149499
ML14XC1S036-230	TXV	35800	16	13	CH33-49	EL296UH090XV36C	9149500
ML14XC1S036-230	TXV	35600	16	13	CH33-49	EL296UH090XV48C	9149501
ML14XC1S036-230	TXV	36000	16	13	CH33-49	EL296UH110XE60C	9149502
ML14XC1S036-230	TXV	36000	16	13	CH33-49	EL296UH110XV48C	9149503
ML14XC1S036-230	TXV	36000	16	13	CH33-49	EL296UH110XV60C	9149504
ML14XC1S036-230	TXV	36000	16	13	CH33-49	SL280UH090V60C	9149505
ML14XC1S036-230	TXV	36000	16	13	CH33-49	SL280UH090XV60C	9149506
ML14XC1S036-230	TXV	36000	16	13	CH33-49	SL280UH110V60C	9149507
ML14XC1S036-230	TXV	36000	16	13	CH33-49	SL280UH110XV60C	9149508
ML14XC1S036-230	TXV	35800	16	13	CH33-49	SLP98UH090XV36C	9149509
ML14XC1S036-230	TXV	35600	16	13	CH33-49	SLP98UH090XV48C	9149510
ML14XC1S036-230	TXV	36000	16	13	CH33-49	SLP98UH110XV60C	9149511

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	35200	15.1	12.2	CH33-49		9149513
ML14XC1S036-230	TXV	35800	16	13	CH33-50/60C	EL180UH090E60C	9149514
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	EL180UH110E60C	9149515
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	EL180UH110XE60C	9149516
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	EL195UH090XE48C	9149517
ML14XC1S036-230	TXV	35800	16	13	CH33-50/60C	EL195UH110XE60C	9149518
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	EL296UH090XE48C	9149519
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	EL296UH090XV36C	9149521
ML14XC1S036-230	TXV	35400	16	13	CH33-50/60C	EL296UH090XV48C	9149522
ML14XC1S036-230	TXV	35800	16	13	CH33-50/60C	EL296UH110XE60C	9149520
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	EL296UH110XV48C	9149523
ML14XC1S036-230	TXV	36000	16	13	CH33-50/60C	EL296UH110XV60C	9149524
ML14XC1S036-230	TXV	36000	16	13	CH33-50/60C	SL280UH090V60C	9149525
ML14XC1S036-230	TXV	36000	16	13	CH33-50/60C	SL280UH090XV60C	9149526
ML14XC1S036-230	TXV	36000	16	13	CH33-50/60C	SL280UH110V60C	9149527
ML14XC1S036-230	TXV	36000	16	13	CH33-50/60C	SL280UH110XV60C	9149528
ML14XC1S036-230	TXV	35600	16	13	CH33-50/60C	SLP98UH090XV36C	9149529
ML14XC1S036-230	TXV	35400	16	13	CH33-50/60C	SLP98UH090XV48C	9149530
ML14XC1S036-230	TXV	36000	16	13	CH33-50/60C	SLP98UH110XV60C	9149531
ML14XC1S036-230	TXV	35000	14.5	12.2	CH33-50/60C		9149533
ML14XC1S036-230	TXV	34600	15.1	12.5	CH35-30A	EL180UH045E36A	9149534
ML14XC1S036-230	TXV	34600	15.1	12.5	CH35-30A	EL180UH045XE36A	9149535
ML14XC1S036-230	TXV	34600	15.1	12.5	CH35-30A	SL280UH070V36A	9149536
ML14XC1S036-230	TXV	34600	15.1	12.5	CH35-30A	SL280UH070XV36A	9149537
ML14XC1S036-230	TXV	35200	15.5	12.5	CH35-30B	EL180UH070E36B	9149538
ML14XC1S036-230	TXV	35200	15.5	12.5	CH35-30B	EL180UH070XE36B	9149539
ML14XC1S036-230	TXV	35000	16	13	CH35-30B	EL180UH090E48B	9149540
ML14XC1S036-230	TXV	35000	16	13	CH35-30B	EL180UH090XE48B	9149541
ML14XC1S036-230	TXV	34800	15.1	12.5	CH35-30B	EL195UH045XE36B	9149542
ML14XC1S036-230	TXV	34800	15.1	12.5	CH35-30B	EL195UH070XE36B	9149543
ML14XC1S036-230	TXV	34800	15.1	12.5	CH35-30B	EL296UH045XE36B	9149544
ML14XC1S036-230	TXV	35000	15.5	12.5	CH35-30B	EL296UH045XV36B	9149545
ML14XC1S036-230	TXV	34800	15.1	12.5	CH35-30B	EL296UH070XE36B	9149546
ML14XC1S036-230	TXV	35000	15.5	12.5	CH35-30B	EL296UH070XV36B	9149547
ML14XC1S036-230	TXV	35200	16	13	CH35-30B	SL280UH090V36B	9149548
ML14XC1S036-230	TXV	35200	16	13	CH35-30B	SL280UH090V48B	9149549
ML14XC1S036-230	TXV	35200	16	13	CH35-30B	SL280UH090XV48B	9149550
ML14XC1S036-230	TXV	35000	15.5	12.5	CH35-30B	SLP98UH070XV36B	9149551
ML14XC1S036-230	TXV	34600	14.5	12.2	CH35-30B		9149552
ML14XC1S036-230	TXV	33200	14.5	12.2	CH35-36A	EL180UH045E36A	9149553
ML14XC1S036-230	TXV	33200	14.5	12.2	CH35-36A	EL180UH045XE36A	9149554
ML14XC1S036-230	TXV	33400	14.5	12.2	CH35-36A	SL280UH070V36A	9149555
ML14XC1S036-230	TXV	33400	14.5	12.2	CH35-36A	SL280UH070XV36A	9149556
ML14XC1S036-230	TXV	33600	15.5	12.5	CH35-36B	EL180UH070E36B	9149557
ML14XC1S036-230	TXV	33600	15.5	12.5	CH35-36B	EL180UH070XE36B	9149558
ML14XC1S036-230	TXV	33600	15.1	12.5	CH35-36B	EL180UH090E48B	9149559
ML14XC1S036-230	TXV	33600	15.1	12.5	CH35-36B	EL180UH090XE48B	9149560
ML14XC1S036-230	TXV	33000	15.1	12.2	CH35-36B	EL195UH045XE36B	9149561
ML14XC1S036-230	TXV	33200	14.5	12	CH35-36B	EL195UH070XE36B	9150114

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	33000	15.1	12.2	CH35-36B	EL296UH045XE36B	9149562
ML14XC1S036-230	TXV	33200	15.1	12.2	CH35-36B	EL296UH045XV36B	9149563
ML14XC1S036-230	TXV	33200	14.5	12	CH35-36B	EL296UH070XE36B	9150115
ML14XC1S036-230	TXV	33200	15.1	12.5	CH35-36B	EL296UH070XV36B	9149564
ML14XC1S036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090V36B	9149565
ML14XC1S036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090V48B	9149566
ML14XC1S036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090XV48B	9149567
ML14XC1S036-230	TXV	33200	15.1	12.5	CH35-36B	SLP98UH070XV36B	9149568
ML14XC1S036-230	TXV	34400	16	13	CH35-36C	EL180UH090E60C	9149569
ML14XC1S036-230	TXV	34200	16	13	CH35-36C	EL180UH110E60C	9149570
ML14XC1S036-230	TXV	34200	16	13	CH35-36C	EL180UH110XE60C	9149571
ML14XC1S036-230	TXV	34200	15.5	12.5	CH35-36C	EL195UH090XE48C	9149572
ML14XC1S036-230	TXV	34400	15.5	12.5	CH35-36C	EL195UH110XE60C	9149573
ML14XC1S036-230	TXV	34200	15.5	12.5	CH35-36C	EL296UH090XE48C	9149574
ML14XC1S036-230	TXV	34200	15.5	12.5	CH35-36C	EL296UH090XV36C	9149575
ML14XC1S036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH090XV48C	9149576
ML14XC1S036-230	TXV	34400	15.5	12.5	CH35-36C	EL296UH110XE60C	9149577
ML14XC1S036-230	TXV	34200	16	13	CH35-36C	EL296UH110XV48C	9149578
ML14XC1S036-230	TXV	34400	16	13	CH35-36C	EL296UH110XV60C	9149579
ML14XC1S036-230	TXV	34600	16	13	CH35-36C	SL280UH090V60C	9149580
ML14XC1S036-230	TXV	34600	16	13	CH35-36C	SL280UH090XV60C	9149581
ML14XC1S036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH110V60C	9149582
ML14XC1S036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH110XV60C	9149583
ML14XC1S036-230	TXV	34200	15.5	12.5	CH35-36C	SLP98UH090XV36C	9149584
ML14XC1S036-230	TXV	34000	15.5	12.5	CH35-36C	SLP98UH090XV48C	9149585
ML14XC1S036-230	TXV	34400	16	13	CH35-36C	SLP98UH110XV60C	9149586
ML14XC1S036-230	TXV	36000	16	13	CH35-42B	EL180UH070E36B	9149587
ML14XC1S036-230	TXV	36000	16	13	CH35-42B	EL180UH070XE36B	9149588
ML14XC1S036-230	TXV	35800	16	13	CH35-42B	EL180UH090E48B	9149589
ML14XC1S036-230	TXV	35800	16	13	CH35-42B	EL180UH090XE48B	9149590
ML14XC1S036-230	TXV	35600	15.5	12.5	CH35-42B	EL195UH045XE36B	9149591
ML14XC1S036-230	TXV	35600	15.5	12.5	CH35-42B	EL195UH070XE36B	9149592
ML14XC1S036-230	TXV	35600	15.5	12.5	CH35-42B	EL296UH045XE36B	9149593
ML14XC1S036-230	TXV	35800	16	13	CH35-42B	EL296UH045XV36B	9149594
ML14XC1S036-230	TXV	35600	15.5	12.5	CH35-42B	EL296UH070XE36B	9149595
ML14XC1S036-230	TXV	35800	16	13	CH35-42B	EL296UH070XV36B	9149596
ML14XC1S036-230	TXV	36000	16	13	CH35-42B	SL280UH090V36B	9149597
ML14XC1S036-230	TXV	36000	16	13	CH35-42B	SL280UH090V48B	9149598
ML14XC1S036-230	TXV	36000	16	13	CH35-42B	SL280UH090XV48B	9149599
ML14XC1S036-230	TXV	35800	16	13	CH35-42B	SLP98UH070XV36B	9149600
ML14XC1S036-230	TXV	35400	15.1	12.5	CH35-42B		9149601
ML14XC1S036-230	TXV	35800	16	13	CH35-42C	EL180UH090E60C	9149602
ML14XC1S036-230	TXV	35400	16	13	CH35-42C	EL180UH110E60C	9149603
ML14XC1S036-230	TXV	35400	16	13	CH35-42C	EL180UH110XE60C	9149604
ML14XC1S036-230	TXV	35400	16	13	CH35-42C	EL195UH090XE48C	9149605
ML14XC1S036-230	TXV	35600	16	13	CH35-42C	EL195UH110XE60C	9149606
ML14XC1S036-230	TXV	35400	16	13	CH35-42C	EL296UH090XE48C	9149607
ML14XC1S036-230	TXV	35600	16	13	CH35-42C	EL296UH090XV36C	9149608
ML14XC1S036-230	TXV	35400	16	13	CH35-42C	EL296UH090XV48C	9149609

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	35600	16	13	CH35-42C	EL296UH110XE60C	9149610
ML14XC1S036-230	TXV	35600	16	13	CH35-42C	EL296UH110XV48C	9149611
ML14XC1S036-230	TXV	35800	16	13	CH35-42C	EL296UH110XV60C	9149612
ML14XC1S036-230	TXV	36000	16	13	CH35-42C	SL280UH090V60C	9149613
ML14XC1S036-230	TXV	36000	16	13	CH35-42C	SL280UH090XV60C	9149614
ML14XC1S036-230	TXV	35800	16	13	CH35-42C	SL280UH110V60C	9149615
ML14XC1S036-230	TXV	35800	16	13	CH35-42C	SL280UH110XV60C	9149616
ML14XC1S036-230	TXV	35600	16	13	CH35-42C	SLP98UH090XV36C	9149617
ML14XC1S036-230	TXV	35400	16	13	CH35-42C	SLP98UH090XV48C	9149618
ML14XC1S036-230	TXV	35800	16	13	CH35-42C	SLP98UH110XV60C	9149619
ML14XC1S036-230	TXV	35000	14.5	12.2	CH35-42C		9149620
ML14XC1S036-230	TXV	35200	15.5	12.5	CH35-48B	EL180UH070E36B	9149621
ML14XC1S036-230	TXV	35200	15.5	12.5	CH35-48B	EL180UH070XE36B	9149622
ML14XC1S036-230	TXV	35000	16	13	CH35-48B	EL180UH090E48B	9149623
ML14XC1S036-230	TXV	35000	16	13	CH35-48B	EL180UH090XE48B	9149624
ML14XC1S036-230	TXV	35000	15.1	12.5	CH35-48B	EL195UH045XE36B	9149625
ML14XC1S036-230	TXV	35000	15.1	12.5	CH35-48B	EL195UH070XE36B	9149626
ML14XC1S036-230	TXV	35000	15.1	12.5	CH35-48B	EL296UH045XE36B	9149627
ML14XC1S036-230	TXV	35000	15.5	12.5	CH35-48B	EL296UH045XV36B	9149628
ML14XC1S036-230	TXV	35000	15.1	12.5	CH35-48B	EL296UH070XE36B	9149629
ML14XC1S036-230	TXV	35200	15.5	12.5	CH35-48B	EL296UH070XV36B	9149630
ML14XC1S036-230	TXV	35200	16	13	CH35-48B	SL280UH090V36B	9149631
ML14XC1S036-230	TXV	35200	16	13	CH35-48B	SL280UH090V48B	9149632
ML14XC1S036-230	TXV	35200	16	13	CH35-48B	SL280UH090XV48B	9149633
ML14XC1S036-230	TXV	35200	15.5	12.5	CH35-48B	SLP98UH070XV36B	9149634
ML14XC1S036-230	TXV	34800	14.5	12.2	CH35-48B		9149635
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	EL180UH090E60C	9149636
ML14XC1S036-230	TXV	35200	16	13	CH35-48C	EL180UH110E60C	9149637
ML14XC1S036-230	TXV	35200	16	13	CH35-48C	EL180UH110XE60C	9149638
ML14XC1S036-230	TXV	35200	16	13	CH35-48C	EL195UH090XE48C	9149639
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	EL195UH110XE60C	9149640
ML14XC1S036-230	TXV	35200	16	13	CH35-48C	EL296UH090XE48C	9149641
ML14XC1S036-230	TXV	35400	16	13	CH35-48C	EL296UH090XV36C	9149642
ML14XC1S036-230	TXV	35200	16	13	CH35-48C	EL296UH090XV48C	9149643
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	EL296UH110XE60C	9149644
ML14XC1S036-230	TXV	35400	16	13	CH35-48C	EL296UH110XV48C	9149645
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	EL296UH110XV60C	9149646
ML14XC1S036-230	TXV	35800	16	13	CH35-48C	SL280UH090V60C	9149647
ML14XC1S036-230	TXV	35800	16	13	CH35-48C	SL280UH090XV60C	9149648
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	SL280UH110V60C	9149649
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	SL280UH110XV60C	9149650
ML14XC1S036-230	TXV	35400	16	13	CH35-48C	SLP98UH090XV36C	9149651
ML14XC1S036-230	TXV	35200	16	13	CH35-48C	SLP98UH090XV48C	9149652
ML14XC1S036-230	TXV	35600	16	13	CH35-48C	SLP98UH110XV60C	9149653
ML14XC1S036-230	TXV	34800	14.5	12.2	CH35-48C		9149654
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	EL180UH090E60C	9149655
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	EL180UH110E60C	9149656
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	EL180UH110XE60C	9149657
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	EL195UH090XE48C	9149658

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	EL195UH110XE60C	9149659
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	EL296UH090XE48C	9149660
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	EL296UH090XV36C	9149661
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	EL296UH090XV48C	9149662
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	EL296UH110XE60C	9149663
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	EL296UH110XV48C	9149664
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	EL296UH110XV60C	9149665
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	SL280UH090V60C	9149666
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	SL280UH090XV60C	9149667
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	SL280UH110V60C	9149668
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	SL280UH110XV60C	9149669
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	SLP98UH090XV36C	9149670
ML14XC1S036-230	TXV	35800	16	13	CH35-51C	SLP98UH090XV48C	9149671
ML14XC1S036-230	TXV	36000	16	13	CH35-51C	SLP98UH110XV60C	9149672
ML14XC1S036-230	TXV	35200	15.1	12.2	CH35-51C		9149673
ML14XC1S036-230	TXV	34000	15.1	12.2	CR33-30/36A	EL180DF045E36A	9149674
ML14XC1S036-230	TXV	33800	15.1	12.5	CR33-30/36A	SL280DF070V36A	9149675
ML14XC1S036-230	TXV	33800	15.5	12.5	CR33-30/36B	EL180DF070E36B	9149676
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36B	EL180DF090E48B	9149677
ML14XC1S036-230	TXV	33800	14.5	12.2	CR33-30/36B	EL195DF045XE36B	9149678
ML14XC1S036-230	TXV	33800	15.1	12.5	CR33-30/36B	EL195DF070XE48B	9149679
ML14XC1S036-230	TXV	33800	14.5	12.2	CR33-30/36B	EL296DF045XE36B	9149680
ML14XC1S036-230	TXV	33800	15.1	12.2	CR33-30/36B	EL296DF045XV36B	9149681
ML14XC1S036-230	TXV	33800	15.1	12.5	CR33-30/36B	EL296DF070XE48B	9149682
ML14XC1S036-230	TXV	33800	14.5	12.2	CR33-30/36B	EL296DF070XV48B	9149683
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36B	SL280DF090V48B	9149684
ML14XC1S036-230	TXV	34000	15.1	12.5	CR33-30/36B	SLP98DF070XV36B	9149685
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL180DF110E60C	9149686
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL195DF090XE48C	9149687
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL195DF110XE60C	9149688
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL296DF090XE48C	9149689
ML14XC1S036-230	TXV	34200	15.1	12.5	CR33-30/36C	EL296DF090XV60C	9149690
ML14XC1S036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL296DF110XE60C	9149691
ML14XC1S036-230	TXV	34200	15.1	12.5	CR33-30/36C	EL296DF110XV60C	9149692
ML14XC1S036-230	TXV	34200	15.5	12.5	CR33-30/36C	SL280DF110V60C	9149693
ML14XC1S036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF090XV36C	9149694
ML14XC1S036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF090XV48C	9149695
ML14XC1S036-230	TXV	34200	15.1	12.5	CR33-30/36C	SLP98DF090XV60C	9149696
ML14XC1S036-230	TXV	34200	15.1	12.5	CR33-30/36C	SLP98DF110XV60C	9149697
ML14XC1S036-230	TXV	34200	16	13	CR33-48B	EL180DF070E36B	9149698
ML14XC1S036-230	TXV	34400	16	13	CR33-48B	EL180DF090E48B	9149699
ML14XC1S036-230	TXV	34000	15.1	12.5	CR33-48B	EL195DF045XE36B	9149700
ML14XC1S036-230	TXV	34200	15.5	12.5	CR33-48B	EL195DF070XE48B	9149701
ML14XC1S036-230	TXV	34000	15.1	12.5	CR33-48B	EL296DF045XE36B	9149702
ML14XC1S036-230	TXV	34200	15.1	12.5	CR33-48B	EL296DF045XV36B	9149703
ML14XC1S036-230	TXV	34200	15.5	12.5	CR33-48B	EL296DF070XE48B	9149704
ML14XC1S036-230	TXV	34400	15.1	12.5	CR33-48B	EL296DF070XV48B	9149705
ML14XC1S036-230	TXV	34400	15.5	12.5	CR33-48B	SL280DF090V48B	9149706
ML14XC1S036-230	TXV	34200	15.5	12.5	CR33-48B	SLP98DF070XV36B	9149707

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	33800	14.5	12	CR33-48B		10238956
ML14XC1S036-230	TXV	34800	16	13	CR33-48C	EL180DF110E60C	9149708
ML14XC1S036-230	TXV	34600	16	13	CR33-48C	EL195DF090XE48C	9149709
ML14XC1S036-230	TXV	34600	16	13	CR33-48C	EL195DF110XE60C	9149710
ML14XC1S036-230	TXV	34600	16	13	CR33-48C	EL296DF090XE48C	9149711
ML14XC1S036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF090XV60C	9149712
ML14XC1S036-230	TXV	34600	16	13	CR33-48C	EL296DF110XE60C	9149713
ML14XC1S036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF110XV60C	9149714
ML14XC1S036-230	TXV	34600	16	13	CR33-48C	SL280DF110V60C	9149715
ML14XC1S036-230	TXV	34400	15.5	12.5	CR33-48C	SLP98DF090XV36C	9149716
ML14XC1S036-230	TXV	34200	16	13	CR33-48C	SLP98DF090XV48C	9149717
ML14XC1S036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF090XV60C	9149718
ML14XC1S036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF110XV60C	9149719
ML14XC1S036-230	TXV	33800	14.5	12	CR33-48C		10238957
ML14XC1S036-230	TXV	33600	15.1	12.2	CX35-30/36A	EL180UH045E36A	9149906
ML14XC1S036-230	TXV	33600	15.1	12.2	CX35-30/36A	EL180UH045XE36A	9149907
ML14XC1S036-230	TXV	33400	15.1	12.5	CX35-30/36A	SL280UH070V36A	9149908
ML14XC1S036-230	TXV	33400	15.1	12.5	CX35-30/36A	SL280UH070XV36A	9149909
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36B	EL180UH070E36B	9149910
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36B	EL180UH070XE36B	9149911
ML14XC1S036-230	TXV	34000	15.5	12.5	CX35-30/36B	EL180UH090E48B	9149912
ML14XC1S036-230	TXV	34000	15.5	12.5	CX35-30/36B	EL180UH090XE48B	9149913
ML14XC1S036-230	TXV	33200	15.1	12.5	CX35-30/36B	EL195UH045XE36B	9149914
ML14XC1S036-230	TXV	33200	15.1	12.5	CX35-30/36B	EL296UH045XE36B	9149915
ML14XC1S036-230	TXV	33200	15.1	12.2	CX35-30/36B	EL296UH045XV36B	9149916
ML14XC1S036-230	TXV	33400	15.1	12.5	CX35-30/36B	EL296UH070XV36B	9149917
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090V36B	9149918
ML14XC1S036-230	TXV	33800	15.5	12.5	CX35-30/36B	SL280UH090V48B	9149919
ML14XC1S036-230	TXV	33800	15.5	12.5	CX35-30/36B	SL280UH090XV48B	9149920
ML14XC1S036-230	TXV	33400	15.1	12.5	CX35-30/36B	SLP98UH070XV36B	9149921
ML14XC1S036-230	TXV	34000	15.5	12.5	CX35-30/36C	EL180UH090E60C	9149922
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL180UH110E60C	9149923
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL180UH110XE60C	9149924
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL195UH090XE48C	9149925
ML14XC1S036-230	TXV	34000	15.5	12.5	CX35-30/36C	EL195UH110XE60C	9149926
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH090XE48C	9149927
ML14XC1S036-230	TXV	33800	15.5	12.5	CX35-30/36C	EL296UH090XV36C	9149928
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH090XV48C	9149929
ML14XC1S036-230	TXV	34000	15.5	12.5	CX35-30/36C	EL296UH110XE60C	9149930
ML14XC1S036-230	TXV	33800	15.5	12.5	CX35-30/36C	EL296UH110XV48C	9149931
ML14XC1S036-230	TXV	33800	15.5	12.5	CX35-30/36C	SLP98UH090XV36C	9149932
ML14XC1S036-230	TXV	33600	15.5	12.5	CX35-30/36C	SLP98UH090XV48C	9149933
ML14XC1S036-230	TXV	34000	15.5	12.5	CX35-30/36C	SLP98UH110XV60C	9149934
ML14XC1S036-230	TXV	34800	15.5	12.5	CX35-30A	EL180UH045E36A	9149935
ML14XC1S036-230	TXV	34800	15.5	12.5	CX35-30A	EL180UH045XE36A	9149936
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-30A	SL280UH070V36A	9149937
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-30A	SL280UH070XV36A	9149938
ML14XC1S036-230	TXV	34400	16	13	CX35-30B	EL180UH070E36B	9149939
ML14XC1S036-230	TXV	34400	16	13	CX35-30B	EL180UH070XE36B	9149940

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-30B	EL180UH090E48B	9149941
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-30B	EL180UH090XE48B	9149942
ML14XC1S036-230	TXV	34400	14.5	12.2	CX35-30B	EL195UH045XE36B	9149943
ML14XC1S036-230	TXV	34400	15.5	12.5	CX35-30B	EL195UH070XE36B	9149944
ML14XC1S036-230	TXV	34400	14.5	12.2	CX35-30B	EL296UH045XE36B	9149945
ML14XC1S036-230	TXV	34600	15.1	12.5	CX35-30B	EL296UH045XV36B	9149946
ML14XC1S036-230	TXV	34400	15.5	12.5	CX35-30B	EL296UH070XE36B	9149947
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-30B	EL296UH070XV36B	9149948
ML14XC1S036-230	TXV	34800	16	13	CX35-30B	SL280UH090V36B	9149949
ML14XC1S036-230	TXV	34800	16	13	CX35-30B	SL280UH090V48B	9149950
ML14XC1S036-230	TXV	34800	16	13	CX35-30B	SL280UH090XV48B	9149951
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-30B	SLP98UH070XV36B	9149952
ML14XC1S036-230	TXV	35200	15.5	12.5	CX35-36A	EL180UH045E36A	9149953
ML14XC1S036-230	TXV	35200	15.5	12.5	CX35-36A	EL180UH045XE36A	9149954
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36A	SL280UH070V36A	9149955
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36A	SL280UH070XV36A	9149956
ML14XC1S036-230	TXV	34600	14.5	12.2	CX35-36A		9149957
ML14XC1S036-230	TXV	35000	16	13	CX35-36B	EL180UH070E36B	9149958
ML14XC1S036-230	TXV	35000	16	13	CX35-36B	EL180UH070XE36B	9149959
ML14XC1S036-230	TXV	35400	16	13	CX35-36B	EL180UH090E48B	9149960
ML14XC1S036-230	TXV	35400	16	13	CX35-36B	EL180UH090XE48B	9149961
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-36B	EL195UH045XE36B	10071306
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36B	EL195UH070XE36B	10071307
ML14XC1S036-230	TXV	34600	15.5	12.5	CX35-36B	EL296UH045XE36B	10071308
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36B	EL296UH045XV36B	10071309
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36B	EL296UH070XE36B	10071310
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36B	EL296UH070XV36B	10071311
ML14XC1S036-230	TXV	35200	16	13	CX35-36B	SL280UH090V36B	10071312
ML14XC1S036-230	TXV	35200	16	13	CX35-36B	SL280UH090V48B	10071313
ML14XC1S036-230	TXV	35200	16	13	CX35-36B	SL280UH090XV48B	10071314
ML14XC1S036-230	TXV	35000	15.5	12.5	CX35-36B	SLP98UH070XV36B	10071315
ML14XC1S036-230	TXV	34600	14.5	12.2	CX35-36B		10071305
ML14XC1S036-230	TXV	34600	14.5	12.2	CX38-38B		10553711
ML14XC1S042-230	RFC	41000	14.25	12.2	CH33-43C		9147078
ML14XC1S042-230	RFC	41500	14.5	12.5	CH33-49		9147127
ML14XC1S042-230	RFC	41500	14.5	12.5	CH33-50/60C		9147149
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36B	EL180UH090E48B	9146878
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36B	EL180UH090XE48B	9146879
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36B	SL280UH090V36B	9146880
ML14XC1S042-230	TXV	39500	14.5	12.5	C35-30/36B	SL280UH090V48B	9146881
ML14XC1S042-230	TXV	39500	14.5	12.5	C35-30/36B	SL280UH090XV48B	9146882
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL180UH090E60C	9146883
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL180UH110E60C	9146884
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL180UH110XE60C	9146885
ML14XC1S042-230	TXV	39000	15.1	12.5	C35-30/36C	EL195UH090XE48C	9146886
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL195UH110XE60C	9146887
ML14XC1S042-230	TXV	39000	15.1	12.5	C35-30/36C	EL296UH090XE48C	9146888
ML14XC1S042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XV36C	9146889
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL296UH090XV48C	9146890

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	39500	14.5	12.5	C35-30/36C	EL296UH090XV60C	9146891
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL296UH110XE60C	9146892
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	EL296UH110XV60C	9146893
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH090V60C	9146894
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH090XV60C	9146895
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH110V60C	9146896
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH110XV60C	9146897
ML14XC1S042-230	TXV	39000	14.5	12.2	C35-30/36C	SLP98UH090XV36C	9146898
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	SLP98UH090XV48C	9146899
ML14XC1S042-230	TXV	39500	14.5	12.5	C35-30/36C	SLP98UH090XV60C	9146900
ML14XC1S042-230	TXV	39500	15.1	12.5	C35-30/36C	SLP98UH110XV60C	9146901
ML14XC1S042-230	TXV	41000	15.5	13	C35-36B	EL180UH090E48B	9146902
ML14XC1S042-230	TXV	41000	15.5	13	C35-36B	EL180UH090XE48B	9146903
ML14XC1S042-230	TXV	41000	15.1	12.5	C35-36B	EL296UH045XV36B	9146904
ML14XC1S042-230	TXV	41000	15.1	12.5	C35-36B	EL296UH070XV36B	9146905
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-36B	SL280UH090V36B	9146906
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-36B	SL280UH090V48B	9146907
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-36B	SL280UH090XV48B	9146908
ML14XC1S042-230	TXV	41000	15.1	12.5	C35-36B	SLP98UH070XV36B	9146909
ML14XC1S042-230	TXV	41500	16	13	C35-48B	EL180UH090E48B	9146910
ML14XC1S042-230	TXV	41500	16	13	C35-48B	EL180UH090XE48B	9146911
ML14XC1S042-230	TXV	41000	15.1	12.5	C35-48B	EL296UH045XV36B	9146912
ML14XC1S042-230	TXV	41000	15.1	12.5	C35-48B	EL296UH070XV36B	9146913
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-48B	SL280UH090V36B	9146914
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-48B	SL280UH090V48B	9146915
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-48B	SL280UH090XV48B	9146916
ML14XC1S042-230	TXV	41000	15.1	12.5	C35-48B	SLP98UH070XV36B	9146917
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL180UH090E60C	9146918
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL180UH110E60C	9146919
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL180UH110XE60C	9146920
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL195UH090XE48C	9146921
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL195UH110XE60C	9146922
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL296UH090XE48C	9146923
ML14XC1S042-230	TXV	41500	15.5	13	C35-48C	EL296UH090XV36C	9146924
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL296UH090XV48C	9146925
ML14XC1S042-230	TXV	41500	15.5	13	C35-48C	EL296UH090XV60C	9146926
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL296UH110XE60C	9146927
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL296UH110XV48C	9146928
ML14XC1S042-230	TXV	41500	16	13	C35-48C	EL296UH110XV60C	9146929
ML14XC1S042-230	TXV	42000	16	13	C35-48C	SL280UH090V60C	9146930
ML14XC1S042-230	TXV	42000	16	13	C35-48C	SL280UH090XV60C	9146931
ML14XC1S042-230	TXV	41500	16	13	C35-48C	SL280UH110V60C	9146932
ML14XC1S042-230	TXV	41500	16	13	C35-48C	SL280UH110XV60C	9146933
ML14XC1S042-230	TXV	41500	15.5	13	C35-48C	SLP98UH090XV36C	9146934
ML14XC1S042-230	TXV	41500	16	13	C35-48C	SLP98UH090XV48C	9146935
ML14XC1S042-230	TXV	41500	15.5	13	C35-48C	SLP98UH090XV60C	9146936
ML14XC1S042-230	TXV	41500	16	13	C35-48C	SLP98UH110XV60C	9146937
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL180UH090E60C	9146938
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL180UH110E60C	9146939

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL180UH110XE60C	9146940
ML14XC1S042-230	TXV	41500	16	13	C35-49C	EL195UH090XE48C	9146941
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL195UH110XE60C	9146942
ML14XC1S042-230	TXV	41500	16	13	C35-49C	EL296UH090XE48C	9146943
ML14XC1S042-230	TXV	41500	16	13	C35-49C	EL296UH090XV36C	9146944
ML14XC1S042-230	TXV	41500	16	13	C35-49C	EL296UH090XV48C	9146945
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL296UH090XV60C	9146946
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL296UH110XE60C	9146947
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL296UH110XV48C	9146948
ML14XC1S042-230	TXV	42000	16	13	C35-49C	EL296UH110XV60C	9146957
ML14XC1S042-230	TXV	42000	16	13	C35-49C	SL280UH090V60C	9146950
ML14XC1S042-230	TXV	42000	16	13	C35-49C	SL280UH090XV60C	9146951
ML14XC1S042-230	TXV	42000	16	13	C35-49C	SL280UH110V60C	9146952
ML14XC1S042-230	TXV	42000	16	13	C35-49C	SL280UH110XV60C	9146953
ML14XC1S042-230	TXV	41500	16	13	C35-49C	SLP98UH090XV36C	9146954
ML14XC1S042-230	TXV	41500	16	13	C35-49C	SLP98UH090XV48C	9146955
ML14XC1S042-230	TXV	42000	16	13	C35-49C	SLP98UH090XV60C	9146956
ML14XC1S042-230	TXV	42000	16	13	C35-49C	SLP98UH110XV60C	9146949
ML14XC1S042-230	TXV	41500	14.5	12.5	C35-49C		9146958
ML14XC1S042-230	TXV	41000	16	13	C35-50/60C	EL180UH090E60C	9146959
ML14XC1S042-230	TXV	41000	16	13	C35-50/60C	EL180UH110E60C	9146960
ML14XC1S042-230	TXV	41000	16	13	C35-50/60C	EL180UH110XE60C	9146961
ML14XC1S042-230	TXV	41000	15.5	13	C35-50/60C	EL195UH090XE48C	9146962
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-50/60C	EL195UH110XE60C	9146963
ML14XC1S042-230	TXV	41000	15.5	13	C35-50/60C	EL296UH090XE48C	9146964
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH090XV36C	9146965
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH090XV48C	9146966
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-50/60C	EL296UH090XV60C	9146967
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-50/60C	EL296UH110XE60C	9146968
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH110XV48C	9146969
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH110XV60C	9146970
ML14XC1S042-230	TXV	41500	15.5	13	C35-50/60C	SL280UH090V60C	9146971
ML14XC1S042-230	TXV	41500	15.5	13	C35-50/60C	SL280UH090XV60C	9146972
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	SL280UH110V60C	9146973
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	SL280UH110XV60C	9146974
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	SLP98UH090XV36C	9146975
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	SLP98UH090XV48C	9146976
ML14XC1S042-230	TXV	41500	15.5	12.5	C35-50/60C	SLP98UH090XV60C	9146977
ML14XC1S042-230	TXV	41000	15.5	12.5	C35-50/60C	SLP98UH110XV60C	9146978
ML14XC1S042-230	TXV	40500	14.5	12.2	C35-50/60C		9146979
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL180UH090E60C	9146980
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL180UH110E60C	9146981
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL180UH110XE60C	9146982
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL195UH090XE48C	9146983
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL195UH110XE60C	9146984
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH090XE48C	9146985
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH090XV36C	9146986
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH090XV48C	9146987
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH090XV60C	9146988

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH110XE60C	9146989
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH110XV48C	9146990
ML14XC1S042-230	TXV	42000	16	13	C35-60C	EL296UH110XV60C	9146991
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SL280UH090V60C	9146992
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SL280UH090XV60C	9146993
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SL280UH110V60C	9146994
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SL280UH110XV60C	9146995
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV36C	9146996
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV48C	9146997
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV60C	9146998
ML14XC1S042-230	TXV	42000	16	13	C35-60C	SLP98UH110XV60C	9146999
ML14XC1S042-230	TXV	42000	15.1	12.5	C35-60C		9147000
ML14XC1S042-230	TXV	42000	16	13	C35-60D	EL180UH135E60D	9147001
ML14XC1S042-230	TXV	42000	16	13	C35-60D	EL195UH135XE60D	9147002
ML14XC1S042-230	TXV	42000	16	13	C35-60D	EL296UH135XE60D	9147003
ML14XC1S042-230	TXV	42000	16	13	C35-60D	SL280UH135V60D	9147004
ML14XC1S042-230	TXV	41500	14.5	12.5	C35-60D		9147005
ML14XC1S042-230	TXV	42000	16	13	CBA27UHE-042		10259441
ML14XC1S042-230	TXV	42000	16	13	CBA27UHE-048		10259442
ML14XC1S042-230	TXV	41000	15.1	12.5	CBX25UH-042		9147006
ML14XC1S042-230	TXV	41500	15.5	12.5	CBX25UH-048		9147007
ML14XC1S042-230	TXV	41500	16	13	CBX25UHV-042		9147008
ML14XC1S042-230	TXV	42000	16	13	CBX25UHV-048		9147009
ML14XC1S042-230	TXV	42000	16	13	CBX27UH-042		9147010
ML14XC1S042-230	TXV	41500	16	13	CBX27UH-048		9147011
ML14XC1S042-230	TXV	40000	14.5	12.5	CBX32M-042		9147012
ML14XC1S042-230	TXV	41500	15.1	12.5	CBX32M-048		9147013
ML14XC1S042-230	TXV	42000	16	13	CBX32MV-048		9147014
ML14XC1S042-230	TXV	41500	16	13	CBX40UHV-042		9147015
ML14XC1S042-230	TXV	42000	16	13	CBX40UHV-048		9147016
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-51	EL180UH090E60C	9147017
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	EL180UH110E60C	9147018
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	EL180UH110XE60C	9147019
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH090XV48C	9147020
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH090XV60C	9147021
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH110XV48C	9147022
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH110XV60C	9147023
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-51	SL280UH090V60C	9147024
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	SL280UH110V60C	9147025
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	SL280UH110XV60C	9147026
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	SLP98UH090XV48C	9147027
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	SLP98UH090XV60C	9147028
ML14XC1S042-230	TXV	40000	15.5	12.5	CH23-51	SLP98UH110XV60C	9147029
ML14XC1S042-230	TXV	40500	16	13	CH23-65	EL180UH090E60C	9147030
ML14XC1S042-230	TXV	40500	15.5	13	CH23-65	EL180UH110E60C	9147031
ML14XC1S042-230	TXV	40500	15.5	13	CH23-65	EL180UH110XE60C	9147032
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH090XV48C	9147033
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH090XV60C	9147034
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH110XV48C	9147035

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH110XV60C	9147036
ML14XC1S042-230	TXV	41000	16	13	CH23-65	SL280UH090V60C	9147037
ML14XC1S042-230	TXV	40500	15.5	13	CH23-65	SL280UH110V60C	9147038
ML14XC1S042-230	TXV	40500	15.5	13	CH23-65	SL280UH110XV60C	9147039
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	SLP98UH090XV48C	9147040
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	SLP98UH090XV60C	9147041
ML14XC1S042-230	TXV	40500	15.5	12.5	CH23-65	SLP98UH110XV60C	9147042
ML14XC1S042-230	TXV	40500	15.5	12.5	CH33-42	EL180UH090E48B	9147043
ML14XC1S042-230	TXV	40500	15.5	12.5	CH33-42	EL180UH090XE48B	9147044
ML14XC1S042-230	TXV	40000	14.5	12.2	CH33-42	EL296UH070XV36B	9147045
ML14XC1S042-230	TXV	40500	15.5	12.5	CH33-42	SL280UH090V36B	9147046
ML14XC1S042-230	TXV	40500	15.1	12.5	CH33-42	SL280UH090V48B	9147047
ML14XC1S042-230	TXV	40500	15.1	12.5	CH33-42	SL280UH090XV48B	9147048
ML14XC1S042-230	TXV	40000	14.5	12.2	CH33-42	SLP98UH070XV36B	9147049
ML14XC1S042-230	TXV	42000	16	13	CH33-43B	EL180UH090E48B	9147050
ML14XC1S042-230	TXV	42000	16	13	CH33-43B	EL180UH090XE48B	9147051
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-43B	EL296UH045XV36B	9147052
ML14XC1S042-230	TXV	41500	15.1	12.5	CH33-43B	EL296UH070XV36B	9147053
ML14XC1S042-230	TXV	42000	16	13	CH33-43B	SL280UH090V36B	9147054
ML14XC1S042-230	TXV	42000	16	13	CH33-43B	SL280UH090V48B	9147055
ML14XC1S042-230	TXV	42000	16	13	CH33-43B	SL280UH090XV48B	9147056
ML14XC1S042-230	TXV	41500	15.1	12.5	CH33-43B	SLP98UH070XV36B	9147057
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL180UH090E60C	9147058
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL180UH110E60C	9147059
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL180UH110XE60C	9147060
ML14XC1S042-230	TXV	41000	16	13	CH33-43C	EL195UH090XE48C	9147061
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL195UH110XE60C	9147062
ML14XC1S042-230	TXV	41000	16	13	CH33-43C	EL296UH090XE48C	9147063
ML14XC1S042-230	TXV	41500	15.5	13	CH33-43C	EL296UH090XV36C	9147064
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL296UH090XV48C	9147065
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL296UH090XV60C	9147066
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL296UH110XE60C	9147067
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL296UH110XV48C	9147068
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	EL296UH110XV60C	9147069
ML14XC1S042-230	TXV	42000	16	13	CH33-43C	SL280UH090V60C	9147070
ML14XC1S042-230	TXV	42000	16	13	CH33-43C	SL280UH090XV60C	9147071
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	SL280UH110V60C	9147072
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	SL280UH110XV60C	9147073
ML14XC1S042-230	TXV	41500	15.5	13	CH33-43C	SLP98UH090XV36C	9147074
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	SLP98UH090XV48C	9147075
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	SLP98UH090XV60C	9147076
ML14XC1S042-230	TXV	41500	16	13	CH33-43C	SLP98UH110XV60C	9147077
ML14XC1S042-230	TXV	41000	14.5	12.2	CH33-43C		9147079
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-44/48B	EL180UH090E48B	9147080
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-44/48B	EL180UH090XE48B	9147081
ML14XC1S042-230	TXV	40500	14.5	12.5	CH33-44/48B	EL296UH070XV36B	9147082
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-44/48B	SL280UH090V36B	9147083
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-44/48B	SL280UH090V48B	9147084
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-44/48B	SL280UH090XV48B	9147085

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	40500	14.5	12.5	CH33-44/48B	SLP98UH070XV36B	9150357
ML14XC1S042-230	TXV	41000	16	13	CH33-48C	EL180UH090E60C	9147087
ML14XC1S042-230	TXV	41000	16	13	CH33-48C	EL180UH110E60C	9147088
ML14XC1S042-230	TXV	41000	16	13	CH33-48C	EL180UH110XE60C	9147089
ML14XC1S042-230	TXV	41000	15.5	13	CH33-48C	EL195UH090XE48C	9147090
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-48C	EL195UH110XE60C	9147091
ML14XC1S042-230	TXV	41000	15.5	13	CH33-48C	EL296UH090XE48C	9147092
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH090XV36C	9147093
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH090XV48C	9147094
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-48C	EL296UH090XV60C	9147095
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-48C	EL296UH110XE60C	9147096
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH110XV48C	9147097
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH110XV60C	9147098
ML14XC1S042-230	TXV	41500	15.5	13	CH33-48C	SL280UH090V60C	9147099
ML14XC1S042-230	TXV	41500	15.5	13	CH33-48C	SL280UH090XV60C	9147100
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	SL280UH110V60C	9147101
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	SL280UH110XV60C	9147102
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	SLP98UH090XV36C	9147103
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	SLP98UH090XV48C	9147104
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-48C	SLP98UH090XV60C	9147105
ML14XC1S042-230	TXV	41000	15.5	12.5	CH33-48C	SLP98UH110XV60C	9147106
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL180UH090E60C	9147107
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL180UH110E60C	9147108
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL180UH110XE60C	9147109
ML14XC1S042-230	TXV	41500	16	13	CH33-49	EL195UH090XE48C	9147110
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL195UH110XE60C	9147111
ML14XC1S042-230	TXV	41500	16	13	CH33-49	EL296UH090XE48C	9147112
ML14XC1S042-230	TXV	41500	15.5	13	CH33-49	EL296UH090XV36C	9147113
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL296UH090XV48C	9147114
ML14XC1S042-230	TXV	42000	15.5	13	CH33-49	EL296UH090XV60C	9147115
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL296UH110XE60C	9147116
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL296UH110XV48C	9147117
ML14XC1S042-230	TXV	42000	16	13	CH33-49	EL296UH110XV60C	9147118
ML14XC1S042-230	TXV	42000	16	13	CH33-49	SL280UH090V60C	9147119
ML14XC1S042-230	TXV	42000	16	13	CH33-49	SL280UH090XV60C	9147120
ML14XC1S042-230	TXV	42000	16	13	CH33-49	SL280UH110V60C	9147121
ML14XC1S042-230	TXV	42000	16	13	CH33-49	SL280UH110XV60C	9147122
ML14XC1S042-230	TXV	41500	15.5	13	CH33-49	SLP98UH090XV36C	9147123
ML14XC1S042-230	TXV	42000	16	13	CH33-49	SLP98UH090XV48C	9147124
ML14XC1S042-230	TXV	42000	15.5	13	CH33-49	SLP98UH090XV60C	9147125
ML14XC1S042-230	TXV	42000	16	13	CH33-49	SLP98UH110XV60C	9147126
ML14XC1S042-230	TXV	41500	14.5	12.5	CH33-49		9147128
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL180UH090E60C	9147129
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL180UH110E60C	9147130
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL180UH110XE60C	9147131
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL195UH090XE48C	9147132
ML14XC1S042-230	TXV	42000	16	13	CH33-50/60C	EL195UH110XE60C	9147133
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL296UH090XE48C	9147134
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH090XV36C	9147135

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL296UH090XV48C	9147136
ML14XC1S042-230	TXV	42000	15.5	12.5	CH33-50/60C	EL296UH090XV60C	9147137
ML14XC1S042-230	TXV	42000	16	13	CH33-50/60C	EL296UH110XE60C	9147138
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL296UH110XV48C	9147139
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	EL296UH110XV60C	9147140
ML14XC1S042-230	TXV	42000	16	13	CH33-50/60C	SL280UH090V60C	9147141
ML14XC1S042-230	TXV	42000	16	13	CH33-50/60C	SL280UH090XV60C	9147142
ML14XC1S042-230	TXV	41500	15.5	13	CH33-50/60C	SL280UH110V60C	9147143
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	SL280UH110XV60C	9147144
ML14XC1S042-230	TXV	41500	15.5	12.5	CH33-50/60C	SLP98UH090XV36C	9147145
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	SLP98UH090XV48C	9147146
ML14XC1S042-230	TXV	42000	15.5	12.5	CH33-50/60C	SLP98UH090XV60C	9147147
ML14XC1S042-230	TXV	41500	16	13	CH33-50/60C	SLP98UH110XV60C	9147148
ML14XC1S042-230	TXV	41000	14.5	12.2	CH33-50/60C		9147150
ML14XC1S042-230	TXV	42000	16	13	CH35-42B	EL180UH090E48B	9147151
ML14XC1S042-230	TXV	42000	16	13	CH35-42B	EL180UH090XE48B	9147152
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-42B	EL296UH045XV36B	9147153
ML14XC1S042-230	TXV	41500	15.1	12.5	CH35-42B	EL296UH070XV36B	9147154
ML14XC1S042-230	TXV	42000	16	13	CH35-42B	SL280UH090V36B	9147155
ML14XC1S042-230	TXV	42000	16	13	CH35-42B	SL280UH090V48B	9147156
ML14XC1S042-230	TXV	42000	16	13	CH35-42B	SL280UH090XV48B	9147157
ML14XC1S042-230	TXV	41500	15.1	12.5	CH35-42B	SLP98UH070XV36B	9147158
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL180UH090E60C	9147159
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL180UH110E60C	9147160
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL180UH110XE60C	9147161
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL195UH090XE48C	9147162
ML14XC1S042-230	TXV	42000	16	13	CH35-42C	EL195UH110XE60C	9147163
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL296UH090XE48C	9147164
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL296UH090XV36C	9147165
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL296UH090XV48C	9147166
ML14XC1S042-230	TXV	42000	16	13	CH35-42C	EL296UH090XV60C	9147167
ML14XC1S042-230	TXV	42000	16	13	CH35-42C	EL296UH110XE60C	9147168
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL296UH110XV48C	9147169
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	EL296UH110XV60C	9147170
ML14XC1S042-230	TXV	42000	16	13	CH35-42C	SL280UH090V60C	9147171
ML14XC1S042-230	TXV	42000	16	13	CH35-42C	SL280UH090XV60C	9147172
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	SL280UH110V60C	9147173
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	SL280UH110XV60C	9147174
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	SLP98UH090XV36C	9147175
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	SLP98UH090XV48C	9147176
ML14XC1S042-230	TXV	42000	16	13	CH35-42C	SLP98UH090XV60C	9147177
ML14XC1S042-230	TXV	41500	16	13	CH35-42C	SLP98UH110XV60C	9147178
ML14XC1S042-230	TXV	41000	14.5	12.2	CH35-42C		9147179
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48B	EL180UH090E48B	9147180
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48B	EL180UH090XE48B	9147181
ML14XC1S042-230	TXV	41000	15.1	12.5	CH35-48B	EL296UH045XV36B	9147182
ML14XC1S042-230	TXV	41000	15.1	12.5	CH35-48B	EL296UH070XV36B	9147183
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48B	SL280UH090V36B	9147184
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48B	SL280UH090V48B	9147185

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48B	SL280UH090XV48B	9147186
ML14XC1S042-230	TXV	41000	15.1	12.5	CH35-48B	SLP98UH070XV36B	9147187
ML14XC1S042-230	TXV	41500	16	13	CH35-48C	EL180UH090E60C	9147188
ML14XC1S042-230	TXV	41500	16	13	CH35-48C	EL180UH110E60C	9147189
ML14XC1S042-230	TXV	41500	16	13	CH35-48C	EL180UH110XE60C	9147190
ML14XC1S042-230	TXV	41000	15.5	13	CH35-48C	EL195UH090XE48C	9147191
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	EL195UH110XE60C	9147192
ML14XC1S042-230	TXV	41000	15.5	13	CH35-48C	EL296UH090XE48C	9147193
ML14XC1S042-230	TXV	41000	15.5	12.5	CH35-48C	EL296UH090XV36C	9147194
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	EL296UH090XV48C	9147195
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48C	EL296UH090XV60C	9147196
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	EL296UH110XE60C	9147197
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	EL296UH110XV48C	9147198
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	EL296UH110XV60C	9147199
ML14XC1S042-230	TXV	41500	16	13	CH35-48C	SL280UH090V60C	9147200
ML14XC1S042-230	TXV	41500	16	13	CH35-48C	SL280UH090XV60C	9147201
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH110V60C	9147202
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH110XV60C	9147203
ML14XC1S042-230	TXV	41000	15.5	12.5	CH35-48C	SLP98UH090XV36C	9147204
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	SLP98UH090XV48C	9147205
ML14XC1S042-230	TXV	41500	15.5	12.5	CH35-48C	SLP98UH090XV60C	9147206
ML14XC1S042-230	TXV	41500	15.5	13	CH35-48C	SLP98UH110XV60C	9147207
ML14XC1S042-230	TXV	41000	14.5	12.2	CH35-48C		9147208
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL180UH090E60C	9147209
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL180UH110E60C	9147210
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL180UH110XE60C	9147211
ML14XC1S042-230	TXV	41500	16	13	CH35-51C	EL195UH090XE48C	9147212
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL195UH110XE60C	9147213
ML14XC1S042-230	TXV	41500	16	13	CH35-51C	EL296UH090XE48C	9147214
ML14XC1S042-230	TXV	41500	15.5	13	CH35-51C	EL296UH090XV36C	9147215
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL296UH090XV48C	9147216
ML14XC1S042-230	TXV	42000	15.5	13	CH35-51C	EL296UH090XV60C	9147217
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL296UH110XE60C	9147218
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL296UH110XV48C	9147219
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	EL296UH110XV60C	9147220
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	SL280UH090V60C	9147221
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	SL280UH090XV60C	9147222
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	SL280UH110V60C	9147223
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	SL280UH110XV60C	9147224
ML14XC1S042-230	TXV	41500	15.5	13	CH35-51C	SLP98UH090XV36C	9147225
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	SLP98UH090XV48C	9147226
ML14XC1S042-230	TXV	42000	15.5	13	CH35-51C	SLP98UH090XV60C	9147227
ML14XC1S042-230	TXV	42000	16	13	CH35-51C	SLP98UH110XV60C	9147228
ML14XC1S042-230	TXV	41500	14.5	12.5	CH35-51C		9147229
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	EL180DF110E60C	9147231
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	EL195DF090XE48C	9147232
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	EL195DF110XE60C	9147233
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	EL296DF090XE48C	9147234
ML14XC1S042-230	TXV	40500	15.1	12.5	CR33-48	EL296DF090XV60C	9147235

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	EL296DF110XE60C	9147236
ML14XC1S042-230	TXV	40500	15.1	12.5	CR33-48	SL280DF090V48B	9147230
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	SL280DF090V60C	9147237
ML14XC1S042-230	TXV	40500	15.5	12.5	CR33-48	SL280DF110V60C	9147238
ML14XC1S042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV36C	9147239
ML14XC1S042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV48C	9147240
ML14XC1S042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV60C	9147241
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	EL180DF110E60C	9147242
ML14XC1S042-230	TXV	41000	15.5	13	CR33-50/60	EL195DF090XE48C	9147243
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	EL195DF110XE60C	9147244
ML14XC1S042-230	TXV	41000	15.5	13	CR33-50/60	EL296DF090XE48C	9147245
ML14XC1S042-230	TXV	41500	15.5	12.5	CR33-50/60	EL296DF090XV60C	9147246
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	EL296DF110XE60C	9147247
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	EL296DF110XV60C	9147248
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	SL280DF090V60C	9147249
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	SL280DF110V60C	9147250
ML14XC1S042-230	TXV	41000	15.5	12.5	CR33-50/60	SLP98DF090XV36C	9147251
ML14XC1S042-230	TXV	41500	15.5	12.5	CR33-50/60	SLP98DF090XV48C	9147252
ML14XC1S042-230	TXV	41500	15.5	12.5	CR33-50/60	SLP98DF090XV60C	9147253
ML14XC1S042-230	TXV	41500	16	13	CR33-50/60	SLP98DF110XV60C	9147254
ML14XC1S042-230	TXV	40500	14.5	12.2	CR33-50/60		10238965
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36B	EL180UH090E48B	9147423
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36B	EL180UH090XE48B	9147424
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36B	SL280UH090V36B	9147425
ML14XC1S042-230	TXV	39500	14.5	12.5	CX35-30/36B	SL280UH090V48B	9147426
ML14XC1S042-230	TXV	39500	14.5	12.5	CX35-30/36B	SL280UH090XV48B	9147427
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL180UH090E60C	9147428
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL180UH110E60C	9147429
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL180UH110XE60C	9147430
ML14XC1S042-230	TXV	39000	15.1	12.5	CX35-30/36C	EL195UH090XE48C	9147431
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL195UH110XE60C	9147432
ML14XC1S042-230	TXV	39000	15.1	12.5	CX35-30/36C	EL296UH090XE48C	9147433
ML14XC1S042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XV36C	9147434
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL296UH090XV48C	9147435
ML14XC1S042-230	TXV	39500	14.5	12.5	CX35-30/36C	EL296UH090XV60C	9147436
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL296UH110XE60C	9147437
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL296UH110XV60C	9147438
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH090V60C	9147439
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH090XV60C	9147440
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH110V60C	9147441
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH110XV60C	9147442
ML14XC1S042-230	TXV	39000	14.5	12.2	CX35-30/36C	SLP98UH090XV36C	9147443
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	SLP98UH090XV48C	9147444
ML14XC1S042-230	TXV	39500	14.5	12.5	CX35-30/36C	SLP98UH090XV60C	9147445
ML14XC1S042-230	TXV	39500	15.1	12.5	CX35-30/36C	SLP98UH110XV60C	9147446
ML14XC1S042-230	TXV	41000	15.5	13	CX35-36B	EL180UH090E48B	9147447
ML14XC1S042-230	TXV	41000	15.5	13	CX35-36B	EL180UH090XE48B	9147448
ML14XC1S042-230	TXV	41000	15.1	12.5	CX35-36B	EL296UH045XV36B	9147449
ML14XC1S042-230	TXV	41000	15.1	12.5	CX35-36B	EL296UH070XV36B	9147450

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-36B	SL280UH090V36B	9147451
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-36B	SL280UH090V48B	9147452
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-36B	SL280UH090XV48B	9147453
ML14XC1S042-230	TXV	41000	15.1	12.5	CX35-36B	SLP98UH070XV36B	9147454
ML14XC1S042-230	TXV	41000	14.5	12.2	CX35-36B		9147455
ML14XC1S042-230	TXV	41500	16	13	CX35-48B	EL180UH090E48B	9147456
ML14XC1S042-230	TXV	41500	16	13	CX35-48B	EL180UH090XE48B	9147457
ML14XC1S042-230	TXV	41000	15.1	12.5	CX35-48B	EL296UH045XV36B	9147458
ML14XC1S042-230	TXV	41000	15.1	12.5	CX35-48B	EL296UH070XV36B	9147459
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-48B	SL280UH090V36B	9147460
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-48B	SL280UH090V48B	9147461
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-48B	SL280UH090XV48B	9147462
ML14XC1S042-230	TXV	41000	15.1	12.5	CX35-48B	SLP98UH070XV36B	9147463
ML14XC1S042-230	TXV	41000	14.5	12.2	CX35-48B		9147464
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL180UH090E60C	9147465
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL180UH110E60C	9147466
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL180UH110XE60C	9147467
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL195UH090XE48C	9147468
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL195UH110XE60C	9147469
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL296UH090XE48C	9147470
ML14XC1S042-230	TXV	41500	15.5	13	CX35-48C	EL296UH090XV36C	9147471
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL296UH090XV48C	9147472
ML14XC1S042-230	TXV	41500	15.5	13	CX35-48C	EL296UH090XV60C	9147473
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL296UH110XE60C	9147474
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL296UH110XV48C	9147475
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	EL296UH110XV60C	9147476
ML14XC1S042-230	TXV	42000	16	13	CX35-48C	SL280UH090V60C	9147477
ML14XC1S042-230	TXV	42000	16	13	CX35-48C	SL280UH090XV60C	9147478
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	SL280UH110V60C	9147479
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	SL280UH110XV60C	9147480
ML14XC1S042-230	TXV	41500	15.5	13	CX35-48C	SLP98UH090XV36C	9147481
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	SLP98UH090XV48C	9147482
ML14XC1S042-230	TXV	41500	15.5	13	CX35-48C	SLP98UH090XV60C	9147483
ML14XC1S042-230	TXV	41500	16	13	CX35-48C	SLP98UH110XV60C	9147484
ML14XC1S042-230	TXV	41000	14.5	12.2	CX35-48C		9147485
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL180UH090E60C	9147486
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL180UH110E60C	9147487
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL180UH110XE60C	9147488
ML14XC1S042-230	TXV	41500	16	13	CX35-49C	EL195UH090XE48C	9147489
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL195UH110XE60C	9147490
ML14XC1S042-230	TXV	41500	16	13	CX35-49C	EL296UH090XE48C	9147491
ML14XC1S042-230	TXV	41500	16	13	CX35-49C	EL296UH090XV36C	9147492
ML14XC1S042-230	TXV	41500	16	13	CX35-49C	EL296UH090XV48C	9147493
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL296UH090XV60C	9147494
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL296UH110XE60C	9147495
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL296UH110XV48C	9147496
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	EL296UH110XV60C	9147497
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	SL280UH090V60C	9147498
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	SL280UH090XV60C	9147499

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	SL280UH110V60C	9147500
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	SL280UH110XV60C	9147501
ML14XC1S042-230	TXV	41500	16	13	CX35-49C	SLP98UH090XV36C	9147502
ML14XC1S042-230	TXV	41500	16	13	CX35-49C	SLP98UH090XV48C	9147503
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	SLP98UH090XV60C	9147504
ML14XC1S042-230	TXV	42000	16	13	CX35-49C	SLP98UH110XV60C	9147505
ML14XC1S042-230	TXV	41500	14.5	12.5	CX35-49C		9147506
ML14XC1S042-230	TXV	41000	16	13	CX35-50/60C	EL180UH090E60C	9147507
ML14XC1S042-230	TXV	41000	16	13	CX35-50/60C	EL180UH110E60C	9147508
ML14XC1S042-230	TXV	41000	16	13	CX35-50/60C	EL180UH110XE60C	9147509
ML14XC1S042-230	TXV	41000	15.5	13	CX35-50/60C	EL195UH090XE48C	9147510
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-50/60C	EL195UH110XE60C	9147511
ML14XC1S042-230	TXV	41000	15.5	13	CX35-50/60C	EL296UH090XE48C	9147512
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH090XV36C	9147513
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH090XV48C	9147514
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-50/60C	EL296UH090XV60C	9147515
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-50/60C	EL296UH110XE60C	9147516
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH110XV48C	9147517
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH110XV60C	9147518
ML14XC1S042-230	TXV	41500	15.5	13	CX35-50/60C	SL280UH090V60C	9147519
ML14XC1S042-230	TXV	41500	15.5	13	CX35-50/60C	SL280UH090XV60C	9147520
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	SL280UH110V60C	9147521
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	SL280UH110XV60C	9147522
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	SLP98UH090XV36C	9147523
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	SLP98UH090XV48C	9147524
ML14XC1S042-230	TXV	41500	15.5	12.5	CX35-50/60C	SLP98UH090XV60C	9147525
ML14XC1S042-230	TXV	41000	15.5	12.5	CX35-50/60C	SLP98UH110XV60C	9147526
ML14XC1S042-230	TXV	40500	14.5	12.2	CX35-50/60C		9147527
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL180UH090E60C	9147528
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL180UH110E60C	9147529
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL180UH110XE60C	9147530
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL195UH090XE48C	9147531
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL195UH110XE60C	9147532
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL296UH090XE48C	9147533
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV36C	9147534
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV48C	9147535
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV60C	9147536
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL296UH110XE60C	9147537
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	EL296UH110XV60C	9147538
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SL280UH090V60C	9147539
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SL280UH090XV60C	9147540
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SL280UH110V60C	9147541
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SL280UH110XV60C	9147542
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV36C	9147543
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV48C	9147544
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV60C	9147545
ML14XC1S042-230	TXV	42000	16	13	CX35-60C	SLP98UH110XV60C	9147546
ML14XC1S042-230	TXV	42000	15.1	12.5	CX35-60C		9147547
ML14XC1S042-230	TXV	42000	16	13	CX35-60D	EL180UH135E60D	9147548

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGIONS - S018, S024, S030, S036, S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1S042-230	TXV	42000	16	13	CX35-60D	EL195UH135XE60D	9147549
ML14XC1S042-230	TXV	42000	16	13	CX35-60D	EL296UH135XE60D	9147550
ML14XC1S042-230	TXV	42000	16	13	CX35-60D	SL280UH135V60D	9147551
ML14XC1S042-230	TXV	41500	14.5	12.5	CX35-60D		9147552

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-018-230	RFC	18000	14.25	12.2	CH33-31A		9141367
ML14XC1-018-230	RFC	18000	14	12.2	CH33-31B		9141376
ML14XC1-018-230	RFC	18000	14	12.2	CR33-30/36A		9141406
ML14XC1-018-230	RFC	18000	14	12.2	CR33-30/36B		9141411
ML14XC1-018-230	TXV	18000	16	13	C35-24A	EL180UH045E36A	9141318
ML14XC1-018-230	TXV	18000	16	13	C35-24A	EL180UH045XE36A	9141319
ML14XC1-018-230	TXV	18000	15.5	12.5	C35-24B	EL180UH070E36B	9141322
ML14XC1-018-230	TXV	18000	15.5	12.5	C35-24B	EL180UH070XE36B	9141323
ML14XC1-018-230	TXV	19600	16	13	C35-24B	EL195UH030XE24B	9141320
ML14XC1-018-230	TXV	19600	16	13	C35-24B	EL195UH045XE24B	9141321
ML14XC1-018-230	TXV	19600	16	13	C35-24B	EL195UH045XE36B	9141324
ML14XC1-018-230	TXV	19600	16	13	C35-24B	EL296UH045XE36B	9141325
ML14XC1-018-230	TXV	19600	16	13	C35-24B	EL296UH045XV36B	9141326
ML14XC1-018-230	TXV	19600	16	13	C35-24B	EL296UH070XV36B	9141327
ML14XC1-018-230	TXV	19600	16	13	C35-24B	SLP98UH070XV36B	9141328
ML14XC1-018-230	TXV	18000	16	13	C35-30A	EL180UH045E36A	9141329
ML14XC1-018-230	TXV	18000	16	13	C35-30A	EL180UH045XE36A	9141330
ML14XC1-018-230	TXV	18000	14.5	12.2	C35-30A		9141331
ML14XC1-018-230	TXV	18000	15.5	13	C35-30B	EL180UH070E36B	9141334
ML14XC1-018-230	TXV	18000	15.5	13	C35-30B	EL180UH070XE36B	9141335
ML14XC1-018-230	TXV	20000	16	13.5	C35-30B	EL195UH030XE24B	9141332
ML14XC1-018-230	TXV	20000	16	13.5	C35-30B	EL195UH045XE24B	9141333
ML14XC1-018-230	TXV	18000	16	13	C35-30B	EL195UH045XE36B	9141336
ML14XC1-018-230	TXV	18000	16	13	C35-30B	EL296UH045XE36B	9141337
ML14XC1-018-230	TXV	20000	16	13.5	C35-30B	EL296UH045XV36B	9141338
ML14XC1-018-230	TXV	20000	17	13.5	C35-30B	EL296UH070XV36B	9141339
ML14XC1-018-230	TXV	20000	17	13.5	C35-30B	SLP98UH070XV36B	9141340
ML14XC1-018-230	TXV	18000	14.5	12.2	C35-30B		9141341
ML14XC1-018-230	TXV	18000	16	13	CBA27UHE-018		10259417
ML14XC1-018-230	TXV	18000	16	13	CBA27UHE-024		10259418
ML14XC1-018-230	TXV	18000	15.5	12.5	CBX25UHV-018		9141342
ML14XC1-018-230	TXV	18000	16	13	CBX25UHV-024		9141343
ML14XC1-018-230	TXV	18000	16	13	CBX27UH-018		9141344
ML14XC1-018-230	TXV	18000	16	13	CBX27UH-024		9141345
ML14XC1-018-230	TXV	18000	14.5	12.2	CBX32M-018/024		9141346
ML14XC1-018-230	TXV	18000	14.5	12.5	CBX32M-030		9141347
ML14XC1-018-230	TXV	18000	16	13	CBX32MV-018/024		9141348
ML14XC1-018-230	TXV	18000	16	13	CBX32MV-024/030		9141349
ML14XC1-018-230	TXV	18000	16	13	CBX40UHV-024		9141350
ML14XC1-018-230	TXV	18000	16	13	CBX40UHV-030		9141351
ML14XC1-018-230	TXV	18000	16	13	CH33-19	EL180UH045E36A	9141352
ML14XC1-018-230	TXV	18000	16	13	CH33-19	EL180UH045XE36A	9141353
ML14XC1-018-230	TXV	18000	15.5	12.5	CH33-24/30	EL180UH045E36A	9141354
ML14XC1-018-230	TXV	18000	15.5	12.5	CH33-24/30	EL180UH045XE36A	9141355
ML14XC1-018-230	TXV	18000	16	13	CH33-25A	EL180UH045E36A	9141356
ML14XC1-018-230	TXV	18000	16	13	CH33-25A	EL180UH045XE36A	9141357
ML14XC1-018-230	TXV	18000	15.5	12.5	CH33-25B	EL180UH070E36B	9141358
ML14XC1-018-230	TXV	18000	15.5	12.5	CH33-25B	EL180UH070XE36B	9141359
ML14XC1-018-230	TXV	19800	16	13	CH33-25B	EL195UH030XE24B	9141360

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-018-230	TXV	19800	16	13	CH33-25B	EL195UH045XE24B	9141361
ML14XC1-018-230	TXV	19400	16	13	CH33-25B	EL195UH045XE36B	9141362
ML14XC1-018-230	TXV	19400	16	13	CH33-25B	EL296UH045XE36B	9141363
ML14XC1-018-230	TXV	19400	16	13	CH33-25B	EL296UH045XV36B	9141364
ML14XC1-018-230	TXV	18000	16	13	CH33-31A	EL180UH045E36A	9141365
ML14XC1-018-230	TXV	18000	16	13	CH33-31A	EL180UH045XE36A	9141366
ML14XC1-018-230	TXV	18000	14.5	12.2	CH33-31A		9141368
ML14XC1-018-230	TXV	18000	16	13	CH33-31B	EL180UH070E36B	9141369
ML14XC1-018-230	TXV	18000	16	13	CH33-31B	EL180UH070XE36B	9141370
ML14XC1-018-230	TXV	20000	16	13.5	CH33-31B	EL195UH030XE24B	9141371
ML14XC1-018-230	TXV	20000	16	13.5	CH33-31B	EL195UH045XE24B	9141372
ML14XC1-018-230	TXV	18000	16	13	CH33-31B	EL195UH045XE36B	9141373
ML14XC1-018-230	TXV	18000	16	13	CH33-31B	EL296UH045XE36B	9141374
ML14XC1-018-230	TXV	20000	17	13.5	CH33-31B	EL296UH045XV36B	9141375
ML14XC1-018-230	TXV	18000	14.5	12.2	CH33-31B		9141377
ML14XC1-018-230	TXV	18000	16	13	CH35-18A	EL180UH045E36A	9141378
ML14XC1-018-230	TXV	18000	16	13	CH35-18A	EL180UH045XE36A	9141379
ML14XC1-018-230	TXV	18000	16	13	CH35-24A	EL180UH045E36A	9141380
ML14XC1-018-230	TXV	18000	16	13	CH35-24A	EL180UH045XE36A	9141381
ML14XC1-018-230	TXV	18000	15.5	12.5	CH35-24B	EL180UH070E36B	9141382
ML14XC1-018-230	TXV	18000	15.5	12.5	CH35-24B	EL180UH070XE36B	9141383
ML14XC1-018-230	TXV	19800	16	13	CH35-24B	EL195UH030XE24B	9141384
ML14XC1-018-230	TXV	19800	16	13	CH35-24B	EL195UH045XE24B	9141385
ML14XC1-018-230	TXV	18000	15.5	12.5	CH35-24B	EL195UH045XE36B	9141386
ML14XC1-018-230	TXV	18000	15.5	12.5	CH35-24B	EL296UH045XE36B	9141387
ML14XC1-018-230	TXV	19600	16	13	CH35-24B	EL296UH045XV36B	9141388
ML14XC1-018-230	TXV	18000	16	13	CH35-30A	EL180UH045E36A	9141389
ML14XC1-018-230	TXV	18000	16	13	CH35-30A	EL180UH045XE36A	9141390
ML14XC1-018-230	TXV	18000	14.5	12.2	CH35-30A		9141391
ML14XC1-018-230	TXV	18000	16	13	CH35-30B	EL180UH070E36B	9141392
ML14XC1-018-230	TXV	18000	16	13	CH35-30B	EL180UH070XE36B	9141393
ML14XC1-018-230	TXV	20000	16	13.5	CH35-30B	EL195UH030XE24B	9141394
ML14XC1-018-230	TXV	20000	16	13.5	CH35-30B	EL195UH045XE24B	9141395
ML14XC1-018-230	TXV	18000	16	13	CH35-30B	EL195UH045XE36B	9141396
ML14XC1-018-230	TXV	18000	16	13	CH35-30B	EL296UH045XE36B	9141397
ML14XC1-018-230	TXV	19600	17	13.5	CH35-30B	EL296UH045XV36B	9141398
ML14XC1-018-230	TXV	18000	14.5	12.2	CH35-30B		9141399
ML14XC1-018-230	TXV	18000	15.5	12.5	CR33-18	EL180DF045E36A	9141400
ML14XC1-018-230	TXV	18000	15.1	12.5	CR33-24A	EL180DF045E36A	9141401
ML14XC1-018-230	TXV	18000	14.5	12.5	CR33-24B	EL180DF070E36B	9141402
ML14XC1-018-230	TXV	18000	14.5	12.2	CR33-24B	EL195DF045E36B	9141403
ML14XC1-018-230	TXV	18000	14.5	12.2	CR33-24B	EL195DF070XE48B	10498871
ML14XC1-018-230	TXV	18000	16	13	CR33-30/36A	EL180DF045E36A	9141405
ML14XC1-018-230	TXV	18000	14.5	12.2	CR33-30/36A		9141407
ML14XC1-018-230	TXV	18000	15.5	13	CR33-30/36B	EL180DF070E36B	9141408
ML14XC1-018-230	TXV	18000	15.5	12.5	CR33-30/36B	EL195DF045E36B	9141409
ML14XC1-018-230	TXV	18000	15.5	12.5	CR33-30/36B	EL195DF070XE48B	10498872
ML14XC1-018-230	TXV	18000	14.5	12.2	CR33-30/36B		9141412
ML14XC1-018-230	TXV	18800	15.5	12.5	CX35-18/24A	EL180UH045E36A	9144622

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-018-230	TXV	18800	15.5	12.5	CX35-18/24A	EL180UH045XE36A	9144623
ML14XC1-018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL180UH070E36B	9141457
ML14XC1-018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL180UH070XE36B	9141458
ML14XC1-018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL195UH045XE36B	9141459
ML14XC1-018-230	TXV	18800	15.5	12.5	CX35-18/24B	EL296UH045XE36B	9141460
ML14XC1-018-230	TXV	18000	16	13	CX35-24A	EL180UH045E36A	9141461
ML14XC1-018-230	TXV	18000	16	13	CX35-24A	EL180UH045XE36A	9141462
ML14XC1-018-230	TXV	18000	15.5	12.5	CX35-24B	EL180UH070E36B	9141463
ML14XC1-018-230	TXV	18000	15.5	12.5	CX35-24B	EL180UH070XE36B	9141464
ML14XC1-018-230	TXV	19800	16	13	CX35-24B	EL195UH030XE24B	9141465
ML14XC1-018-230	TXV	19800	16	13	CX35-24B	EL195UH045XE24B	9141466
ML14XC1-018-230	TXV	19600	16	13	CX35-24B	EL195UH045XE36B	9141467
ML14XC1-018-230	TXV	19600	16	13	CX35-24B	EL296UH045XE36B	9141468
ML14XC1-018-230	TXV	19600	16	13	CX35-24B	EL296UH045XV36B	9141469
ML14XC1-018-230	TXV	19800	16	13	CX35-24B	EL296UH070XV36B	9141470
ML14XC1-018-230	TXV	19800	16	13	CX35-24B	SLP98UH070XV36B	9141471
ML14XC1-018-230	TXV	18000	16	13	CX35-30A	EL180UH045E36A	9141472
ML14XC1-018-230	TXV	18000	16	13	CX35-30A	EL180UH045XE36A	9141473
ML14XC1-018-230	TXV	18000	14.5	12.2	CX35-30A		9141474
ML14XC1-018-230	TXV	18000	15.5	13	CX35-30B	EL180UH070E36B	9141475
ML14XC1-018-230	TXV	18000	15.5	13	CX35-30B	EL180UH070XE36B	9141476
ML14XC1-018-230	TXV	20000	16	13.5	CX35-30B	EL195UH030XE24B	9141477
ML14XC1-018-230	TXV	20000	16	13.5	CX35-30B	EL195UH045XE24B	9141478
ML14XC1-018-230	TXV	18000	16	13	CX35-30B	EL195UH045XE36B	9141479
ML14XC1-018-230	TXV	18000	16	13	CX35-30B	EL296UH045XE36B	9141480
ML14XC1-018-230	TXV	20000	16	13.5	CX35-30B	EL296UH045XV36B	9141481
ML14XC1-018-230	TXV	20000	17	13.5	CX35-30B	EL296UH070XV36B	9141482
ML14XC1-018-230	TXV	20000	17	13.5	CX35-30B	SLP98UH070XV36B	9141483
ML14XC1-018-230	TXV	18000	14.5	12.2	CX35-30B		9141484
ML14XC1-018-230	TXV	18000	14.25	12.2	CX38-25B		10550975
ML14XC1-024-230	RFC	24000	14.25	12.2	CH33-31A		9141762
ML14XC1-024-230	RFC	24000	14.25	12.2	CH33-31B		9141776
ML14XC1-024-230	RFC	24000	14	12.2	CH33-42B		9141798
ML14XC1-024-230	RFC	24000	14.25	12.2	CH33-43B		9141802
ML14XC1-024-230	TXV	24000	16	13	C35-24A	EL180UH045E36A	9141613
ML14XC1-024-230	TXV	24000	16	13	C35-24A	EL180UH045XE36A	9141614
ML14XC1-024-230	TXV	24000	16	13	C35-24A	SL280UH070V36A	9141615
ML14XC1-024-230	TXV	24000	16	13	C35-24A	SL280UH070XV36A	9141616
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL180UH070E36B	9141617
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL180UH070XE36B	9141618
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL195UH030XE24B	9141619
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL195UH045XE24B	9141620
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL195UH045XE36B	9141621
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL195UH070XE36B	9141622
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL296UH045XE36B	9141623
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL296UH045XV36B	9141624
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL296UH070XE36B	9141625
ML14XC1-024-230	TXV	24000	16	13	C35-24B	EL296UH070XV36B	9141626
ML14XC1-024-230	TXV	24000	16	13	C35-24B	SL280UH090V36B	9141627

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	C35-24B	SL280UH090V48B	9141628
ML14XC1-024-230	TXV	24000	16	13	C35-24B	SL280UH090XV48B	9141629
ML14XC1-024-230	TXV	24000	16	13	C35-24B	SLP98UH070XV36B	9141630
ML14XC1-024-230	TXV	24000	16	13	C35-30/36A	EL180UH045E36A	9141631
ML14XC1-024-230	TXV	24000	16	13	C35-30/36A	EL180UH045XE36A	9141632
ML14XC1-024-230	TXV	24000	16	13	C35-30/36A	SL280UH070V36A	9141633
ML14XC1-024-230	TXV	24000	16	13	C35-30/36A	SL280UH070XV36A	9141634
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL180UH070E36B	9141635
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL180UH070XE36B	9141636
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL195UH030XE24B	9141637
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL195UH045XE24B	9141638
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL195UH045XE36B	9141639
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL195UH070XE36B	9141640
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL296UH045XE36B	9141641
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL296UH045XV36B	9141642
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL296UH070XE36B	9141643
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	EL296UH070XV36B	9141644
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V36B	9141645
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V48B	9141646
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	SL280UH090XV48B	9141647
ML14XC1-024-230	TXV	24000	16	13	C35-30/36B	SLP98UH070XV36B	9141648
ML14XC1-024-230	TXV	24000	16	13	C35-30/36C	EL296UH090XV36C	9141649
ML14XC1-024-230	TXV	24000	16	13	C35-30/36C	SLP98UH090XV36C	9141650
ML14XC1-024-230	TXV	24000	16	13	C35-30A	EL180UH045E36A	9141651
ML14XC1-024-230	TXV	24000	16	13	C35-30A	EL180UH045XE36A	9141652
ML14XC1-024-230	TXV	24000	16	13	C35-30A	SL280UH070V36A	9141653
ML14XC1-024-230	TXV	24000	16	13	C35-30A	SL280UH070XV36A	9141654
ML14XC1-024-230	TXV	24000	14.5	12.2	C35-30A		9141655
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL180UH070E36B	9141656
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL180UH070XE36B	9141657
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL195UH030XE24B	9141658
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL195UH045XE24B	9141659
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL195UH045XE36B	9141660
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL195UH070XE36B	9141661
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL296UH045XE36B	9141662
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL296UH045XV36B	9141663
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL296UH070XE36B	9141664
ML14XC1-024-230	TXV	24000	16	13	C35-30B	EL296UH070XV36B	9141665
ML14XC1-024-230	TXV	24000	16	13	C35-30B	SL280UH090V36B	9141666
ML14XC1-024-230	TXV	24000	16	13	C35-30B	SL280UH090V48B	9141667
ML14XC1-024-230	TXV	24000	16	13	C35-30B	SL280UH090XV48B	9141668
ML14XC1-024-230	TXV	24000	16	13	C35-30B	SLP98UH070XV36B	9141669
ML14XC1-024-230	TXV	24000	14.5	12.2	C35-30B		9141670
ML14XC1-024-230	TXV	24000	16	13	C35-36A	EL180UH045E36A	9141671
ML14XC1-024-230	TXV	24000	16	13	C35-36A	EL180UH045XE36A	9141672
ML14XC1-024-230	TXV	24000	16	13	C35-36A	SL280UH070V36A	9141673
ML14XC1-024-230	TXV	24000	16	13	C35-36A	SL280UH070XV36A	9141674
ML14XC1-024-230	TXV	24000	14.5	12.2	C35-36A		9141675
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL180UH070E36B	9141676

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL180UH070XE36B	9141677
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL195UH030XE24B	9141678
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL195UH045XE24B	9141679
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL195UH045XE36B	9141680
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL195UH070XE36B	9141681
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL296UH045XE36B	9141682
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL296UH045XV36B	9141683
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL296UH070XE36B	9141684
ML14XC1-024-230	TXV	24000	16	13	C35-36B	EL296UH070XV36B	9141685
ML14XC1-024-230	TXV	24000	16	13	C35-36B	SL280UH090V36B	9141686
ML14XC1-024-230	TXV	24000	16	13	C35-36B	SL280UH090V48B	9141687
ML14XC1-024-230	TXV	24000	16	13	C35-36B	SL280UH090XV48B	9141688
ML14XC1-024-230	TXV	24000	16	13	C35-36B	SLP98UH070XV36B	9141689
ML14XC1-024-230	TXV	24000	14.5	12.2	C35-36B		9141690
ML14XC1-024-230	TXV	24000	16	13	CBA27UHE-024		10259419
ML14XC1-024-230	TXV	24000	16	13	CBA27UHE-030		10259420
ML14XC1-024-230	TXV	24000	14.5	12.2	CBX25UH-036		9141691
ML14XC1-024-230	TXV	24000	16	13	CBX25UHV-024		9141692
ML14XC1-024-230	TXV	24000	16	13	CBX25UHV-030		9141693
ML14XC1-024-230	TXV	24000	16	13	CBX25UHV-036		9141694
ML14XC1-024-230	TXV	24000	16	13	CBX27UH-024		9141695
ML14XC1-024-230	TXV	24000	16	13	CBX27UH-030		9141696
ML14XC1-024-230	TXV	24000	14.5	12.2	CBX32M-018/024		9141697
ML14XC1-024-230	TXV	24000	15.1	12.5	CBX32M-030		9141698
ML14XC1-024-230	TXV	24000	15.5	12.5	CBX32MV-018/024		9141699
ML14XC1-024-230	TXV	24000	16	13	CBX32MV-024/030		9141700
ML14XC1-024-230	TXV	24000	16	13	CBX40UHV-024		9141701
ML14XC1-024-230	TXV	23800	15.5	12.5	CH23-31	EL180UH045E36A	9141702
ML14XC1-024-230	TXV	23800	15.5	12.5	CH23-31	EL180UH045XE36A	9141703
ML14XC1-024-230	TXV	23800	15.5	13	CH23-31	EL180UH070E36B	9141704
ML14XC1-024-230	TXV	23800	15.5	13	CH23-31	EL180UH070XE36B	9141705
ML14XC1-024-230	TXV	23200	15.5	12.5	CH23-31	EL195UH030XE24B	9141706
ML14XC1-024-230	TXV	23200	15.5	12.5	CH23-31	EL195UH045XE24B	9141707
ML14XC1-024-230	TXV	23400	15.1	12.5	CH23-31	EL195UH045XE36B	9141708
ML14XC1-024-230	TXV	23800	15.5	12.5	CH23-31	EL195UH070XE36B	9141709
ML14XC1-024-230	TXV	23400	15.1	12.5	CH23-31	EL296UH045XE36B	9141710
ML14XC1-024-230	TXV	23600	15.5	12.5	CH23-31	EL296UH045XV36B	9141711
ML14XC1-024-230	TXV	23800	15.5	12.5	CH23-31	EL296UH070XE36B	9141712
ML14XC1-024-230	TXV	23600	15.5	12.5	CH23-31	EL296UH070XV36B	9141713
ML14XC1-024-230	TXV	23600	15.5	12.5	CH23-31	SL280UH070V36A	9141714
ML14XC1-024-230	TXV	23600	15.5	12.5	CH23-31	SL280UH070XV36A	9141715
ML14XC1-024-230	TXV	23400	15.5	12.5	CH23-31	SL280UH090V36B	9141716
ML14XC1-024-230	TXV	23600	15.5	12.5	CH23-31	SLP98UH070XV36B	9141717
ML14XC1-024-230	TXV	24200	16	13	CH23-41	EL180UH045E36A	9141718
ML14XC1-024-230	TXV	24200	16	13	CH23-41	EL180UH045XE36A	9141719
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL180UH070E36B	9141720
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL180UH070XE36B	9141721
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL195UH030XE24B	9141722
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL195UH045XE24B	9141723

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL195UH045XE36B	9141724
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL195UH070XE36B	9141725
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL296UH045XE36B	9141726
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL296UH045XV36B	9141727
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL296UH070XE36B	9141728
ML14XC1-024-230	TXV	24000	16	13	CH23-41	EL296UH070XV36B	9141729
ML14XC1-024-230	TXV	24000	16	13	CH23-41	SL280UH070V36A	9141730
ML14XC1-024-230	TXV	24000	16	13	CH23-41	SL280UH070XV36A	9141731
ML14XC1-024-230	TXV	24000	16	13	CH23-41	SL280UH090V36B	9141732
ML14XC1-024-230	TXV	24000	16	13	CH23-41	SLP98UH070XV36B	9141733
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-19	EL180UH045E36A	9141734
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-19	EL180UH045XE36A	9141735
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-19	SL280UH070V36A	9141736
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-19	SL280UH070XV36A	9141737
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-24/30	EL180UH045E36A	9141738
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-24/30	EL180UH045XE36A	9141739
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-24/30	SL280UH070V36A	9141740
ML14XC1-024-230	TXV	24000	15.5	12.5	CH33-24/30	SL280UH070XV36A	9141741
ML14XC1-024-230	TXV	24000	16	13	CH33-25A	EL180UH045E36A	9141742
ML14XC1-024-230	TXV	24000	16	13	CH33-25A	EL180UH045XE36A	9141743
ML14XC1-024-230	TXV	24000	16	13	CH33-25A	SL280UH070V36A	9141744
ML14XC1-024-230	TXV	24000	16	13	CH33-25A	SL280UH070XV36A	9141745
ML14XC1-024-230	TXV	24000	14.5	12.2	CH33-25A		10055354
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL180UH070E36B	9141746
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL180UH070XE36B	9141747
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL195UH030XE24B	9141748
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL195UH045XE24B	9141749
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL195UH045XE36B	9141750
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL195UH070XE36B	9141751
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL296UH045XE36B	9141752
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL296UH045XV36B	9141753
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL296UH070XE36B	9141754
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	EL296UH070XV36B	9141755
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	SL280UH090V36B	9141756
ML14XC1-024-230	TXV	24000	16	13	CH33-25B	SLP98UH070XV36B	9141757
ML14XC1-024-230	TXV	24000	16	13	CH33-31A	EL180UH045E36A	9141758
ML14XC1-024-230	TXV	24000	16	13	CH33-31A	EL180UH045XE36A	9141759
ML14XC1-024-230	TXV	24000	16	13	CH33-31A	SL280UH070V36A	9141760
ML14XC1-024-230	TXV	24000	16	13	CH33-31A	SL280UH070XV36A	9141761
ML14XC1-024-230	TXV	24000	14.5	12.2	CH33-31A		9141763
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL180UH070E36B	9141764
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL180UH070XE36B	9141765
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL195UH030XE24B	9141766
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE24B	9141767
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE36B	9141768
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL195UH070XE36B	9141769
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL296UH045XE36B	9141770
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL296UH045XV36B	9141771
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL296UH070XE36B	9141772

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	EL296UH070XV36B	9141773
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	SL280UH090V36B	9141774
ML14XC1-024-230	TXV	24000	16	13	CH33-31B	SLP98UH070XV36B	9141775
ML14XC1-024-230	TXV	24000	14.5	12.2	CH33-31B		9141777
ML14XC1-024-230	TXV	24000	16	13	CH33-36A	EL180UH045E36A	9141778
ML14XC1-024-230	TXV	24000	16	13	CH33-36A	EL180UH045XE36A	9141779
ML14XC1-024-230	TXV	24000	16	13	CH33-36A	SL280UH070V36A	9141780
ML14XC1-024-230	TXV	24000	16	13	CH33-36A	SL280UH070XV36A	9141781
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL180UH070E36B	9141782
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL180UH070XE36B	9141783
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL195UH030XE24B	9141784
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL195UH045XE24B	9141785
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL195UH045XE36B	9141786
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL195UH070XE36B	9141787
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL296UH045XE36B	9141788
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL296UH045XV36B	9141789
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL296UH070XE36B	9141790
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	EL296UH070XV36B	9141791
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	SL280UH090V36B	9141792
ML14XC1-024-230	TXV	24000	16	13	CH33-36B	SLP98UH070XV36B	9141793
ML14XC1-024-230	TXV	24000	16	13	CH33-36C	EL296UH090XV36C	9141794
ML14XC1-024-230	TXV	24000	16	13	CH33-36C	SLP98UH090XV36C	9141795
ML14XC1-024-230	TXV	24000	16	13	CH33-42	EL195UH030XE24B	9141796
ML14XC1-024-230	TXV	24000	16	13	CH33-42	EL195UH045XE24B	9141797
ML14XC1-024-230	TXV	24000	16	13.5	CH33-43B	EL195UH030XE24B	9141799
ML14XC1-024-230	TXV	24000	16	13.5	CH33-43B	EL195UH045XE24B	9141800
ML14XC1-024-230	TXV	24000	16	13	CH33-43B	EL195UH045XE36B	9141801
ML14XC1-024-230	TXV	24000	15.5	12.5	CH35-18A	EL180UH045E36A	9141803
ML14XC1-024-230	TXV	24000	15.5	12.5	CH35-18A	EL180UH045XE36A	9141804
ML14XC1-024-230	TXV	24000	16	13	CH35-18A	SL280UH070V36A	9141805
ML14XC1-024-230	TXV	24000	16	13	CH35-18A	SL280UH070XV36A	9141806
ML14XC1-024-230	TXV	24000	16	13	CH35-24A	EL180UH045E36A	9141807
ML14XC1-024-230	TXV	24000	16	13	CH35-24A	EL180UH045XE36A	9141808
ML14XC1-024-230	TXV	24000	16	13	CH35-24A	SL280UH070V36A	9141809
ML14XC1-024-230	TXV	24000	16	13	CH35-24A	SL280UH070XV36A	9141810
ML14XC1-024-230	TXV	24000	14.5	12.2	CH35-24A		10055353
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL180UH070E36B	9141811
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL180UH070XE36B	9141812
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL195UH030XE24B	9141813
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL195UH045XE24B	9141814
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL195UH045XE36B	9141815
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL195UH070XE36B	9141816
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL296UH045XE36B	10357491
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL296UH045XV36B	9141817
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	EL296UH070XV36B	9141818
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	SL280UH090V36B	9141819
ML14XC1-024-230	TXV	24000	16	13	CH35-24B	SLP98UH070XV36B	9141820
ML14XC1-024-230	TXV	24000	14.5	12.2	CH35-24B		9141821
ML14XC1-024-230	TXV	24000	16	13	CH35-30A	EL180UH045E36A	9141822

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	CH35-30A	EL180UH045XE36A	9141823
ML14XC1-024-230	TXV	24000	16	13	CH35-30A	SL280UH070V36A	9141824
ML14XC1-024-230	TXV	24000	16	13	CH35-30A	SL280UH070XV36A	9141825
ML14XC1-024-230	TXV	24000	14.5	12.2	CH35-30A		9141826
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL180UH070E36B	9141827
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL180UH070XE36B	9141828
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL195UH030XE24B	9141829
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE24B	9141830
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE36B	9141831
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL195UH070XE36B	9141832
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL296UH045XE36B	10357492
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL296UH045XV36B	9141833
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	EL296UH070XV36B	9141834
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	SL280UH090V36B	9141835
ML14XC1-024-230	TXV	24000	16	13	CH35-30B	SLP98UH070XV36B	9141836
ML14XC1-024-230	TXV	24000	14.5	12.2	CH35-30B		9141837
ML14XC1-024-230	TXV	24000	16	13	CH35-36A	EL180UH045E36A	9141838
ML14XC1-024-230	TXV	24000	16	13	CH35-36A	EL180UH045XE36A	9141839
ML14XC1-024-230	TXV	24000	16	13	CH35-36A	SL280UH070V36A	9141840
ML14XC1-024-230	TXV	24000	16	13	CH35-36A	SL280UH070XV36A	9141841
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL180UH070E36B	9141842
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL180UH070XE36B	9141843
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL195UH030XE24B	9141844
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL195UH045XE24B	9141845
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL195UH045XE36B	9141846
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL195UH070XE36B	9141847
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL296UH045XE36B	10357493
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL296UH045XV36B	9141848
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	EL296UH070XV36B	9141849
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	SL280UH090V36B	9141850
ML14XC1-024-230	TXV	24000	16	13	CH35-36B	SLP98UH070XV36B	9141851
ML14XC1-024-230	TXV	24000	16	13	CH35-36C	EL296UH090XV36C	9141852
ML14XC1-024-230	TXV	24000	16	13	CH35-36C	SLP98UH090XV36C	9141853
ML14XC1-024-230	TXV	23200	15.1	12.5	CR33-24A	EL180DF045E36A	9141854
ML14XC1-024-230	TXV	23400	15.1	12.5	CR33-24A	SL280DF070V36A	9141855
ML14XC1-024-230	TXV	23400	15.1	12.5	CR33-24B	EL180DF070E36B	9141856
ML14XC1-024-230	TXV	23200	15.1	12.5	CR33-24B	EL195DF045XE36B	9141857
ML14XC1-024-230	TXV	23200	15.1	12.5	CR33-24B	EL195DF070XE48B	9141858
ML14XC1-024-230	TXV	23200	15.1	12.5	CR33-24B	EL296DF045XE36B	9141859
ML14XC1-024-230	TXV	23600	15.1	12.5	CR33-24B	EL296DF045XV36B	9141860
ML14XC1-024-230	TXV	23200	15.1	12.5	CR33-24B	EL296DF070XE48B	9141861
ML14XC1-024-230	TXV	23800	14.5	12.5	CR33-24B	EL296DF070XV48B	9141862
ML14XC1-024-230	TXV	23200	15.1	12.5	CR33-24B	SLP98DF070XV36B	9141863
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36A	EL180DF045E36A	9141864
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36A	SL280DF070V36A	9141865
ML14XC1-024-230	TXV	24000	14.5	12.2	CR33-30/36A		9141866
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL180DF070E36B	9141867
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL195DF045XE36B	9141868
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL195DF070XE48B	9141869

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XE36B	9141870
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XV36B	9141871
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XE48B	9141872
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XV48B	9141873
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	SL280DF090V48B	9141874
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36B	SLP98DF070XV36B	9141875
ML14XC1-024-230	TXV	24000	14.5	12.2	CR33-30/36B		9141876
ML14XC1-024-230	TXV	24000	16	13	CR33-30/36C	SLP98DF090XV36C	9141877
ML14XC1-024-230	TXV	24000	14.5	12.2	CR33-30/36C		9141878
ML14XC1-024-230	TXV	23800	15.1	12.5	CX35-18/24A	EL180UH045E36A	9141985
ML14XC1-024-230	TXV	23800	15.1	12.5	CX35-18/24A	EL180UH045XE36A	9141986
ML14XC1-024-230	TXV	24000	16	13	CX35-24A	EL180UH045E36A	9141987
ML14XC1-024-230	TXV	24000	16	13	CX35-24A	EL180UH045XE36A	9141988
ML14XC1-024-230	TXV	24000	16	13	CX35-24A	SL280UH070V36A	9141989
ML14XC1-024-230	TXV	24000	16	13	CX35-24A	SL280UH070XV36A	9141990
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL180UH070E36B	9141991
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL180UH070XE36B	9141992
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL195UH030XE24B	9141993
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE24B	9141994
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE36B	9141995
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL195UH070XE36B	9141996
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL296UH045XE36B	9141997
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL296UH045XV36B	9141998
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL296UH070XE36B	9141999
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	EL296UH070XV36B	9142000
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	SL280UH090V36B	9142001
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	SL280UH090V48B	9142002
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	SL280UH090XV48B	9142003
ML14XC1-024-230	TXV	24000	16	13	CX35-24B	SLP98UH070XV36B	9142004
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045E36A	9142005
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045XE36A	9142006
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070V36A	9142007
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070XV36A	9142008
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070E36B	9142009
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070XE36B	9142010
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL195UH030XE24B	9142011
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL195UH045XE24B	9142012
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL195UH045XE36B	9142013
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL195UH070XE36B	9142014
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL296UH045XE36B	9142015
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL296UH045XV36B	9142016
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL296UH070XE36B	9142017
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	EL296UH070XV36B	9142018
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V36B	9142019
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V48B	9142020
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090XV48B	9142021
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36B	SLP98UH070XV36B	9142022
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36C	EL296UH090XV36C	9142023
ML14XC1-024-230	TXV	24000	16	13	CX35-30/36C	SLP98UH090XV36C	9142024

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-024-230	TXV	24000	16	13	CX35-30A	EL180UH045E36A	9142025
ML14XC1-024-230	TXV	24000	16	13	CX35-30A	EL180UH045XE36A	9142026
ML14XC1-024-230	TXV	24000	16	13	CX35-30A	SL280UH070V36A	9142027
ML14XC1-024-230	TXV	24000	16	13	CX35-30A	SL280UH070XV36A	9142028
ML14XC1-024-230	TXV	24000	14.5	12.2	CX35-30A		9142029
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL180UH070E36B	9142030
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL180UH070XE36B	9142031
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL195UH030XE24B	9142032
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE24B	9142033
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE36B	9142034
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL195UH070XE36B	9142035
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL296UH045XE36B	9142036
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL296UH045XV36B	9142037
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL296UH070XE36B	9142038
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	EL296UH070XV36B	9142039
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	SL280UH090V36B	9142040
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	SL280UH090V48B	9142041
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	SL280UH090XV48B	9142042
ML14XC1-024-230	TXV	24000	16	13	CX35-30B	SLP98UH070XV36B	9142043
ML14XC1-024-230	TXV	24000	14.5	12.2	CX35-30B		9142044
ML14XC1-024-230	TXV	24000	16	13	CX35-36A	EL180UH045E36A	9142045
ML14XC1-024-230	TXV	24000	16	13	CX35-36A	EL180UH045XE36A	9142046
ML14XC1-024-230	TXV	24000	16	13	CX35-36A	SL280UH070V36A	9142047
ML14XC1-024-230	TXV	24000	16	13	CX35-36A	SL280UH070XV36A	9142048
ML14XC1-024-230	TXV	24000	14.5	12.2	CX35-36A		9142049
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL180UH070E36B	9142050
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL180UH070XE36B	9142051
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL195UH030XE24B	9142052
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE24B	9142053
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE36B	9142054
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL195UH070XE36B	9142055
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL296UH045XE36B	9142056
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL296UH045XV36B	9142057
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL296UH070XE36B	9142058
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	EL296UH070XV36B	9142059
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	SL280UH090V36B	9142060
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	SL280UH090V48B	9142061
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	SL280UH090XV48B	9142062
ML14XC1-024-230	TXV	24000	16	13	CX35-36B	SLP98UH070XV36B	9142063
ML14XC1-024-230	TXV	24000	14.5	12.2	CX35-36B		9142064
ML14XC1-024-230	TXV	24000	14.25	12.2	CX38-25B		10551150
ML14XC1-030-230	RFC	28600	14.25	12.2	CH33-31A		9142334
ML14XC1-030-230	RFC	28800	14.25	12.2	CH33-31B		9142348
ML14XC1-030-230	RFC	29200	14.5	12.5	CH33-43B		9142392
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-24A	EL180UH045E36A	9142188
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-24A	EL180UH045XE36A	9142189
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-24A	SL280UH070V36A	9142190
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-24A	SL280UH070XV36A	9142191
ML14XC1-030-230	TXV	28600	15.5	13	C35-24B	EL180UH070E36B	9142192

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	28600	15.5	13	C35-24B	EL180UH070XE36B	9142193
ML14XC1-030-230	TXV	28600	15.5	13	C35-24B	EL180UH090E48B	9142194
ML14XC1-030-230	TXV	28600	15.5	13	C35-24B	EL180UH090XE48B	9142195
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-24B	EL195UH045XE36B	9142196
ML14XC1-030-230	TXV	28800	15.1	12.5	C35-24B	EL195UH070XE36B	9142197
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-24B	EL296UH045XE36B	9142198
ML14XC1-030-230	TXV	28800	15.1	12.5	C35-24B	EL296UH070XE36B	9142199
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-24B	EL296UH070XV36B	9142200
ML14XC1-030-230	TXV	28600	16	13	C35-24B	SL280UH090V36B	9142201
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-24B	SLP98UH070XV36B	9142202
ML14XC1-030-230	TXV	28400	15.5	12.5	C35-30/36A	EL180UH045E36A	9142203
ML14XC1-030-230	TXV	28400	15.5	12.5	C35-30/36A	EL180UH045XE36A	9142204
ML14XC1-030-230	TXV	28400	15.5	12.5	C35-30/36A	SL280UH070V36A	9142205
ML14XC1-030-230	TXV	28400	15.5	12.5	C35-30/36A	SL280UH070XV36A	9142206
ML14XC1-030-230	TXV	28600	15.5	13	C35-30/36B	EL180UH070E36B	9142207
ML14XC1-030-230	TXV	28600	15.5	13	C35-30/36B	EL180UH070XE36B	9142208
ML14XC1-030-230	TXV	28600	16	13	C35-30/36B	EL180UH090E48B	9142209
ML14XC1-030-230	TXV	28600	16	13	C35-30/36B	EL180UH090XE48B	9142210
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-30/36B	EL195UH045XE36B	9142211
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-30/36B	EL195UH070XE36B	9142212
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-30/36B	EL296UH045XE36B	9142213
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-30/36B	EL296UH045XV36B	9142214
ML14XC1-030-230	TXV	28600	15.1	12.5	C35-30/36B	EL296UH070XE36B	9142215
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-30/36B	EL296UH070XV36B	9142216
ML14XC1-030-230	TXV	28600	15.5	13	C35-30/36B	SL280UH090V36B	9142217
ML14XC1-030-230	TXV	28600	15.5	12.5	C35-30/36B	SLP98UH070XV36B	9142218
ML14XC1-030-230	TXV	28400	15.5	12.5	C35-30/36C	EL195UH090XE48C	9142219
ML14XC1-030-230	TXV	28400	15.5	12.5	C35-30/36C	EL296UH090XE48C	9142220
ML14XC1-030-230	TXV	28400	15.5	13	C35-30/36C	EL296UH090XV36C	9142221
ML14XC1-030-230	TXV	28400	15.5	13	C35-30/36C	SLP98UH090XV36C	9142222
ML14XC1-030-230	TXV	29200	15.5	13	C35-30A	EL180UH045E36A	9142223
ML14XC1-030-230	TXV	29200	15.5	13	C35-30A	EL180UH045XE36A	9142224
ML14XC1-030-230	TXV	29200	16	13	C35-30A	SL280UH070V36A	9142225
ML14XC1-030-230	TXV	29200	16	13	C35-30A	SL280UH070XV36A	9142226
ML14XC1-030-230	TXV	28600	14.25	12.2	C35-30A		9142227
ML14XC1-030-230	TXV	29200	16	13	C35-30B	EL180UH070E36B	9142228
ML14XC1-030-230	TXV	29200	16	13	C35-30B	EL180UH070XE36B	9142229
ML14XC1-030-230	TXV	29200	16	13	C35-30B	EL180UH090E48B	9142230
ML14XC1-030-230	TXV	29200	16	13	C35-30B	EL180UH090XE48B	9142231
ML14XC1-030-230	TXV	29200	15.5	12.5	C35-30B	EL195UH045XE36B	9142232
ML14XC1-030-230	TXV	29400	15.5	12.5	C35-30B	EL195UH070XE36B	9142233
ML14XC1-030-230	TXV	29200	15.5	12.5	C35-30B	EL296UH045XE36B	9142234
ML14XC1-030-230	TXV	29400	15.5	12.5	C35-30B	EL296UH070XE36B	9142235
ML14XC1-030-230	TXV	29200	16	13	C35-30B	EL296UH070XV36B	9142236
ML14XC1-030-230	TXV	29200	16	13	C35-30B	SL280UH090V36B	9142237
ML14XC1-030-230	TXV	29200	16	13	C35-30B	SLP98UH070XV36B	9142238
ML14XC1-030-230	TXV	29400	16	13	C35-36A	EL180UH045E36A	9142239
ML14XC1-030-230	TXV	29400	16	13	C35-36A	EL180UH045XE36A	9142240
ML14XC1-030-230	TXV	29400	16	13	C35-36A	SL280UH070V36A	9142241

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	29400	16	13	C35-36A	SL280UH070XV36A	9142242
ML14XC1-030-230	TXV	28800	14.5	12.2	C35-36A		9142243
ML14XC1-030-230	TXV	29600	16	13	C35-36B	EL180UH070E36B	9142244
ML14XC1-030-230	TXV	29600	16	13	C35-36B	EL180UH070XE36B	9142245
ML14XC1-030-230	TXV	29600	16	13	C35-36B	EL180UH090E48B	9142246
ML14XC1-030-230	TXV	29600	16	13	C35-36B	EL180UH090XE48B	9142247
ML14XC1-030-230	TXV	29400	15.5	13	C35-36B	EL195UH045XE36B	9142248
ML14XC1-030-230	TXV	29600	16	13	C35-36B	EL195UH070XE36B	9142249
ML14XC1-030-230	TXV	29400	15.5	13	C35-36B	EL296UH045XE36B	9142250
ML14XC1-030-230	TXV	29400	15.5	13	C35-36B	EL296UH045XV36B	9142251
ML14XC1-030-230	TXV	29600	16	13	C35-36B	EL296UH070XE36B	9150136
ML14XC1-030-230	TXV	29400	16	13	C35-36B	EL296UH070XV36B	9142252
ML14XC1-030-230	TXV	29400	16	13	C35-36B	SL280UH090V36B	9142253
ML14XC1-030-230	TXV	29400	16	13	C35-36B	SLP98UH070XV36B	9142254
ML14XC1-030-230	TXV	28800	14.5	12.2	C35-36B		9142255
ML14XC1-030-230	TXV	29600	16	13	C35-48B	EL180UH070E36B	9142256
ML14XC1-030-230	TXV	29600	16	13	C35-48B	EL180UH070XE36B	9142257
ML14XC1-030-230	TXV	29600	16	13	C35-48B	EL180UH090E48B	9142258
ML14XC1-030-230	TXV	29600	16	13	C35-48B	EL180UH090XE48B	9142259
ML14XC1-030-230	TXV	29400	16	13	C35-48B	EL195UH045XE36B	9142260
ML14XC1-030-230	TXV	29600	16	13	C35-48B	EL195UH070XE36B	9142261
ML14XC1-030-230	TXV	29400	16	13	C35-48B	EL296UH045XE36B	9142262
ML14XC1-030-230	TXV	29400	15.5	13	C35-48B	EL296UH045XV36B	9142263
ML14XC1-030-230	TXV	29600	16	13	C35-48B	EL296UH070XE36B	9142264
ML14XC1-030-230	TXV	29400	16	13	C35-48B	EL296UH070XV36B	9142265
ML14XC1-030-230	TXV	29400	16	13	C35-48B	SL280UH090V36B	9142266
ML14XC1-030-230	TXV	29400	16	13	C35-48B	SLP98UH070XV36B	9142267
ML14XC1-030-230	TXV	29000	14.5	12.2	C35-48B		9142268
ML14XC1-030-230	TXV	29400	16	13	C35-48C	EL195UH090XE48C	9142269
ML14XC1-030-230	TXV	29400	16	13	C35-48C	EL296UH090XE48C	9142270
ML14XC1-030-230	TXV	29400	16	13	C35-48C	EL296UH090XV36C	9142271
ML14XC1-030-230	TXV	29200	16	13	C35-48C	EL296UH090XV48C	9142272
ML14XC1-030-230	TXV	29400	16	13	C35-48C	SLP98UH090XV36C	9142273
ML14XC1-030-230	TXV	29200	16	13	C35-48C	SLP98UH090XV48C	9142274
ML14XC1-030-230	TXV	29000	14.5	12.2	C35-48C		9142275
ML14XC1-030-230	TXV	29000	16	13	CBA27UHE-030		10259421
ML14XC1-030-230	TXV	29000	16	13	CBA27UHE-036		10259422
ML14XC1-030-230	TXV	28400	14.25	12.2	CBX25UH-036		9142276
ML14XC1-030-230	TXV	28600	15.1	12.5	CBX25UHV-030		9142277
ML14XC1-030-230	TXV	28800	15.5	12.5	CBX25UHV-036		9142278
ML14XC1-030-230	TXV	29000	16	13	CBX27UH-030		9142279
ML14XC1-030-230	TXV	29000	16	13	CBX27UH-036		9142280
ML14XC1-030-230	TXV	28400	14.5	12.5	CBX32M-030		9142281
ML14XC1-030-230	TXV	28600	14.5	12.5	CBX32M-036		9142282
ML14XC1-030-230	TXV	28200	15	12.5	CBX32MV-024/030		10267538
ML14XC1-030-230	TXV	28800	15.5	12.5	CBX32MV-036		9142283
ML14XC1-030-230	TXV	28800	15.5	12.5	CBX40UHV-030		9142284
ML14XC1-030-230	TXV	28800	15.5	13	CBX40UHV-036		9142285
ML14XC1-030-230	TXV	27000	14.5	12.5	CH23-31	EL180UH070E36B	9142286

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	27000	14.5	12.5	CH23-31	EL180UH070XE36B	9142287
ML14XC1-030-230	TXV	27000	14.5	12.2	CH23-31	EL296UH045XV36B	9142288
ML14XC1-030-230	TXV	27000	15.1	12.5	CH23-31	EL296UH070XV36B	9142289
ML14XC1-030-230	TXV	26800	15.1	12.5	CH23-31	SL280UH090V36B	9142290
ML14XC1-030-230	TXV	27000	15.1	12.5	CH23-31	SLP98UH070XV36B	9142291
ML14XC1-030-230	TXV	28600	15.5	12.5	CH23-41	EL180UH045E36A	9142292
ML14XC1-030-230	TXV	28600	15.5	12.5	CH23-41	EL180UH045XE36A	9142293
ML14XC1-030-230	TXV	28600	15.5	13	CH23-41	EL180UH070E36B	9142294
ML14XC1-030-230	TXV	28600	15.5	13	CH23-41	EL180UH070XE36B	9142295
ML14XC1-030-230	TXV	28600	16	13	CH23-41	EL180UH090E48B	9142296
ML14XC1-030-230	TXV	28600	16	13	CH23-41	EL180UH090XE48B	9142297
ML14XC1-030-230	TXV	28600	15.5	12.5	CH23-41	EL195UH045XE36B	9142298
ML14XC1-030-230	TXV	28600	15.1	12.5	CH23-41	EL195UH070XE36B	9142299
ML14XC1-030-230	TXV	28600	15.5	12.5	CH23-41	EL296UH045XE36B	9142300
ML14XC1-030-230	TXV	28400	15.5	12.5	CH23-41	EL296UH045XV36B	9142301
ML14XC1-030-230	TXV	28600	15.1	12.5	CH23-41	EL296UH070XE36B	9142302
ML14XC1-030-230	TXV	28600	15.5	12.5	CH23-41	EL296UH070XV36B	9142303
ML14XC1-030-230	TXV	28800	16	13	CH23-41	SL280UH090V36B	9142304
ML14XC1-030-230	TXV	28600	15.5	12.5	CH23-41	SLP98UH070XV36B	9142305
ML14XC1-030-230	TXV	27800	15.1	12.5	CH33-19	EL180UH045E36A	9142306
ML14XC1-030-230	TXV	27800	15.1	12.5	CH33-19	EL180UH045XE36A	9142307
ML14XC1-030-230	TXV	27800	15.1	12.5	CH33-19	SL280UH070V36A	9142308
ML14XC1-030-230	TXV	27800	15.1	12.5	CH33-19	SL280UH070XV36A	9142309
ML14XC1-030-230	TXV	27600	14.5	12.5	CH33-24/30	EL180UH045E36A	9142310
ML14XC1-030-230	TXV	27600	14.5	12.5	CH33-24/30	EL180UH045XE36A	9142311
ML14XC1-030-230	TXV	27800	15.1	12.5	CH33-24/30	SL280UH070V36A	9142312
ML14XC1-030-230	TXV	27800	15.1	12.5	CH33-24/30	SL280UH070XV36A	9142313
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-25A	EL180UH045E36A	9142314
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-25A	EL180UH045XE36A	9142315
ML14XC1-030-230	TXV	28600	15.5	12.5	CH33-25A	SL280UH070V36A	9142316
ML14XC1-030-230	TXV	28600	15.5	12.5	CH33-25A	SL280UH070XV36A	9142317
ML14XC1-030-230	TXV	28600	15.5	12.5	CH33-25B	EL180UH070E36B	9142318
ML14XC1-030-230	TXV	28600	15.5	12.5	CH33-25B	EL180UH070XE36B	9142319
ML14XC1-030-230	TXV	28600	15.5	13	CH33-25B	EL180UH090E48B	9142320
ML14XC1-030-230	TXV	28600	15.5	13	CH33-25B	EL180UH090XE48B	9142321
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-25B	EL195UH045XE36B	9142322
ML14XC1-030-230	TXV	28600	15.1	12.5	CH33-25B	EL195UH070XE36B	9142323
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-25B	EL296UH045XE36B	9142324
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-25B	EL296UH045XV36B	9142325
ML14XC1-030-230	TXV	28600	15.1	12.5	CH33-25B	EL296UH070XE36B	9142326
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-25B	EL296UH070XV36B	9142327
ML14XC1-030-230	TXV	28600	16	13	CH33-25B	SL280UH090V36B	9150360
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-25B	SLP98UH070XV36B	9142329
ML14XC1-030-230	TXV	29000	15.5	12.5	CH33-31A	EL180UH045E36A	9142330
ML14XC1-030-230	TXV	29000	15.5	12.5	CH33-31A	EL180UH045XE36A	9142331
ML14XC1-030-230	TXV	29000	15.5	13	CH33-31A	SL280UH070V36A	9142332
ML14XC1-030-230	TXV	29000	15.5	13	CH33-31A	SL280UH070XV36A	9142333
ML14XC1-030-230	TXV	28600	14.25	12.2	CH33-31A		9142335
ML14XC1-030-230	TXV	29400	16	13	CH33-31B	EL180UH070E36B	9142336

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	29400	16	13	CH33-31B	EL180UH070XE36B	9142337
ML14XC1-030-230	TXV	29400	16	13	CH33-31B	EL180UH090E48B	9142338
ML14XC1-030-230	TXV	29400	16	13	CH33-31B	EL180UH090XE48B	9142339
ML14XC1-030-230	TXV	29200	15.5	13	CH33-31B	EL195UH045XE36B	9142340
ML14XC1-030-230	TXV	29400	15.5	13	CH33-31B	EL195UH070XE36B	9142341
ML14XC1-030-230	TXV	29200	15.5	13	CH33-31B	EL296UH045XE36B	9142342
ML14XC1-030-230	TXV	29200	15.5	13	CH33-31B	EL296UH045XV36B	9142343
ML14XC1-030-230	TXV	29400	15.5	13	CH33-31B	EL296UH070XE36B	9142344
ML14XC1-030-230	TXV	29200	16	13	CH33-31B	EL296UH070XV36B	9142345
ML14XC1-030-230	TXV	29200	16	13	CH33-31B	SL280UH090V36B	9142346
ML14XC1-030-230	TXV	29200	16	13	CH33-31B	SLP98UH070XV36B	9142347
ML14XC1-030-230	TXV	28800	14.5	12.2	CH33-31B		9142349
ML14XC1-030-230	TXV	28200	15.1	12.5	CH33-36A	EL180UH045E36A	9142350
ML14XC1-030-230	TXV	28200	15.1	12.5	CH33-36A	EL180UH045XE36A	9142351
ML14XC1-030-230	TXV	28200	15.1	12.5	CH33-36A	SL280UH070V36A	9142352
ML14XC1-030-230	TXV	28200	15.1	12.5	CH33-36A	SL280UH070XV36A	9142353
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-36B	EL180UH070E36B	9142354
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-36B	EL180UH070XE36B	9142355
ML14XC1-030-230	TXV	28400	15.5	13	CH33-36B	EL180UH090E48B	9142356
ML14XC1-030-230	TXV	28400	15.5	13	CH33-36B	EL180UH090XE48B	9142357
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-36B	EL195UH045XE36B	9142358
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-36B	EL195UH070XE36B	9142359
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-36B	EL296UH045XE36B	9142360
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-36B	EL296UH045XV36B	9142361
ML14XC1-030-230	TXV	28400	15.1	12.5	CH33-36B	EL296UH070XE36B	9142362
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-36B	SL280UH090V36B	9142363
ML14XC1-030-230	TXV	28400	15.5	12.5	CH33-36B	SLP98UH070XV36B	9142364
ML14XC1-030-230	TXV	28600	16	13	CH33-36C	EL195UH090XE48C	9142365
ML14XC1-030-230	TXV	28600	16	13	CH33-36C	EL296UH090XE48C	9142366
ML14XC1-030-230	TXV	28600	16	13	CH33-36C	EL296UH090XV36C	9142367
ML14XC1-030-230	TXV	28600	16	13	CH33-36C	SLP98UH090XV36C	9142368
ML14XC1-030-230	TXV	29200	16	13	CH33-42	EL180UH070E36B	9142369
ML14XC1-030-230	TXV	29200	16	13	CH33-42	EL180UH070XE36B	9142370
ML14XC1-030-230	TXV	29200	16	13	CH33-42	EL180UH090E48B	9142371
ML14XC1-030-230	TXV	29200	16	13	CH33-42	EL180UH090XE48B	9142372
ML14XC1-030-230	TXV	29000	15.5	12.5	CH33-42	EL195UH045XE36B	9142373
ML14XC1-030-230	TXV	29200	15.5	12.5	CH33-42	EL195UH070XE36B	9142374
ML14XC1-030-230	TXV	29000	15.5	12.5	CH33-42	EL296UH045XE36B	9142375
ML14XC1-030-230	TXV	29000	15.5	12.5	CH33-42	EL296UH045XV36B	9142376
ML14XC1-030-230	TXV	29200	15.5	12.5	CH33-42	EL296UH070XE36B	9142377
ML14XC1-030-230	TXV	29000	15.5	13	CH33-42	EL296UH070XV36B	9142378
ML14XC1-030-230	TXV	29000	15.5	13	CH33-42	SLP98UH070XV36B	9142379
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL180UH070E36B	9142380
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL180UH070XE36B	9142381
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL180UH090E48B	9142382
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL180UH090XE48B	9142383
ML14XC1-030-230	TXV	29400	16	13	CH33-43B	EL195UH045XE36B	9142384
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL195UH070XE36B	9142385
ML14XC1-030-230	TXV	29400	16	13	CH33-43B	EL296UH045XE36B	9142386

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL296UH045XV36B	9142387
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL296UH070XE36B	9142388
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	EL296UH070XV36B	9142389
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	SL280UH090V36B	9142390
ML14XC1-030-230	TXV	29600	16	13	CH33-43B	SLP98UH070XV36B	9142391
ML14XC1-030-230	TXV	29000	14.5	12.2	CH33-43B		9142393
ML14XC1-030-230	TXV	29400	16	13	CH33-43C	EL195UH090XE48C	9142394
ML14XC1-030-230	TXV	29400	16	13	CH33-43C	EL296UH090XE48C	9142395
ML14XC1-030-230	TXV	29400	16	13	CH33-43C	EL296UH090XV36C	9142396
ML14XC1-030-230	TXV	29400	16	13	CH33-43C	SLP98UH090XV36C	9142397
ML14XC1-030-230	TXV	29000	14.5	12.2	CH33-43C		9142398
ML14XC1-030-230	TXV	28600	15.5	13	CH35-24B	EL180UH070E36B	9142399
ML14XC1-030-230	TXV	29000	15.5	12.5	CH35-30A	EL180UH045E36A	9142400
ML14XC1-030-230	TXV	29000	15.5	12.5	CH35-30A	EL180UH045XE36A	9142401
ML14XC1-030-230	TXV	29200	15.5	13	CH35-30A	SL280UH070V36A	9142402
ML14XC1-030-230	TXV	29200	15.5	13	CH35-30A	SL280UH070XV36A	9142403
ML14XC1-030-230	TXV	28800	14.5	12.2	CH35-30A		9142404
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	EL180UH070E36B	9142405
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	EL180UH070XE36B	9142406
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	EL180UH090E48B	9142407
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	EL180UH090XE48B	9142408
ML14XC1-030-230	TXV	29400	15.5	13	CH35-30B	EL195UH045XE36B	9142409
ML14XC1-030-230	TXV	29600	15.5	13	CH35-30B	EL195UH070XE36B	9142410
ML14XC1-030-230	TXV	29400	15.5	13	CH35-30B	EL296UH045XE36B	9142411
ML14XC1-030-230	TXV	29400	15.5	13	CH35-30B	EL296UH045XV36B	9142412
ML14XC1-030-230	TXV	29600	15.5	13	CH35-30B	EL296UH070XE36B	9142413
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	EL296UH070XV36B	9142414
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	SL280UH090V36B	9142415
ML14XC1-030-230	TXV	29400	16	13	CH35-30B	SLP98UH070XV36B	9142416
ML14XC1-030-230	TXV	28800	14.5	12.2	CH35-30B		9142417
ML14XC1-030-230	TXV	28200	15.1	12.5	CH35-36A	EL180UH045E36A	9142418
ML14XC1-030-230	TXV	28200	15.1	12.5	CH35-36A	EL180UH045XE36A	9142419
ML14XC1-030-230	TXV	28400	15.1	12.5	CH35-36A	SL280UH070V36A	9142420
ML14XC1-030-230	TXV	28400	15.1	12.5	CH35-36A	SL280UH070XV36A	9142421
ML14XC1-030-230	TXV	28600	15.5	13	CH35-36B	EL180UH070E36B	9142422
ML14XC1-030-230	TXV	28600	15.5	13	CH35-36B	EL180UH070XE36B	9142423
ML14XC1-030-230	TXV	28600	16	13	CH35-36B	EL180UH090E48B	9142424
ML14XC1-030-230	TXV	28600	16	13	CH35-36B	EL180UH090XE48B	9142425
ML14XC1-030-230	TXV	28400	15.1	12.5	CH35-36B	EL195UH045XE36B	9142426
ML14XC1-030-230	TXV	28600	15.1	12.5	CH35-36B	EL195UH070XE36B	9142427
ML14XC1-030-230	TXV	28400	15.1	12.5	CH35-36B	EL296UH045XE36B	9142428
ML14XC1-030-230	TXV	28400	15.1	12.5	CH35-36B	EL296UH045XV36B	9142429
ML14XC1-030-230	TXV	28600	15.1	12.5	CH35-36B	EL296UH070XE36B	9142430
ML14XC1-030-230	TXV	28600	15.5	12.5	CH35-36B	EL296UH070XV36B	9142431
ML14XC1-030-230	TXV	28600	15.5	12.5	CH35-36B	SLP98UH070XV36B	9142432
ML14XC1-030-230	TXV	28600	16	13	CH35-36C	EL195UH090XE48C	9142433
ML14XC1-030-230	TXV	28600	16	13	CH35-36C	EL296UH090XE48C	9142434
ML14XC1-030-230	TXV	28600	16	13	CH35-36C	EL296UH090XV36C	9142435
ML14XC1-030-230	TXV	28600	16	13	CH35-36C	SLP98UH090XV36C	9142436

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	30000	16	13	CH35-42B	EL180UH070E36B	9142437
ML14XC1-030-230	TXV	30000	16	13	CH35-42B	EL180UH070XE36B	9142438
ML14XC1-030-230	TXV	30000	16	13	CH35-42B	EL180UH090E48B	9142439
ML14XC1-030-230	TXV	30000	16	13	CH35-42B	EL180UH090XE48B	9142440
ML14XC1-030-230	TXV	29800	16	13	CH35-42B	EL195UH045XE36B	9142441
ML14XC1-030-230	TXV	30000	16	13	CH35-42B	EL195UH070XE36B	9142442
ML14XC1-030-230	TXV	29800	16	13	CH35-42B	EL296UH045XE36B	9142443
ML14XC1-030-230	TXV	29800	16	13	CH35-42B	EL296UH045XV36B	9142444
ML14XC1-030-230	TXV	30000	16	13	CH35-42B	EL296UH070XE36B	9142445
ML14XC1-030-230	TXV	29800	16	13	CH35-42B	EL296UH070XV36B	9142446
ML14XC1-030-230	TXV	29800	16	13	CH35-42B	SL280UH090V36B	9142447
ML14XC1-030-230	TXV	29800	16	13	CH35-42B	SLP98UH070XV36B	9142448
ML14XC1-030-230	TXV	29400	14.5	12.5	CH35-42B		9142449
ML14XC1-030-230	TXV	29600	16	13	CH35-42C	EL195UH090XE48C	9142450
ML14XC1-030-230	TXV	29600	16	13	CH35-42C	EL296UH090XE48C	9142451
ML14XC1-030-230	TXV	29400	16	13	CH35-42C	EL296UH090XV36C	9142452
ML14XC1-030-230	TXV	29400	16	13	CH35-42C	SLP98UH090XV36C	9142453
ML14XC1-030-230	TXV	29000	14.5	12.2	CH35-42C		9142454
ML14XC1-030-230	TXV	27000	14.5	12.2	CR33-24A	EL180DF045E36A	9142455
ML14XC1-030-230	TXV	26800	14.5	12.2	CR33-24B	EL180DF070E36B	9142456
ML14XC1-030-230	TXV	27000	14.25	12.2	CR33-24B	EL296DF045XV36B	9142457
ML14XC1-030-230	TXV	26800	14.25	12.2	CR33-24B	SL280DF090V48B	9142458
ML14XC1-030-230	TXV	28800	15.5	12.5	CR33-30/36A	EL180DF045E36A	9142459
ML14XC1-030-230	TXV	28800	15.5	12.5	CR33-30/36A	SL280DF070V36A	9142460
ML14XC1-030-230	TXV	28800	16	13	CR33-30/36B	EL180DF070E36B	9142461
ML14XC1-030-230	TXV	28600	16	13	CR33-30/36B	EL180DF090E48B	9142462
ML14XC1-030-230	TXV	28600	15.1	12.5	CR33-30/36B	EL195DF045XE36B	9142463
ML14XC1-030-230	TXV	28800	15.5	12.5	CR33-30/36B	EL195DF070XE48B	9142464
ML14XC1-030-230	TXV	28600	15.1	12.5	CR33-30/36B	EL296DF045XE36B	9142465
ML14XC1-030-230	TXV	28800	15.5	12.5	CR33-30/36B	EL296DF045XV36B	9142466
ML14XC1-030-230	TXV	28800	15.5	12.5	CR33-30/36B	EL296DF070XE48B	9142467
ML14XC1-030-230	TXV	28600	15.5	12.5	CR33-30/36B	EL296DF070XV48B	9142468
ML14XC1-030-230	TXV	28400	15.5	12.5	CR33-30/36B	SL280DF090V48B	9142469
ML14XC1-030-230	TXV	28600	15.5	12.5	CR33-30/36B	SLP98DF070XV36B	9142470
ML14XC1-030-230	TXV	28800	16	13	CR33-30/36C	SLP98DF090XV36C	9142471
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24A	EL180UH045E36A	9142593
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24A	EL180UH045XE36A	9142594
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24A	SL280UH070V36A	9142595
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24A	SL280UH070XV36A	9142596
ML14XC1-030-230	TXV	28600	15.5	13	CX35-24B	EL180UH070E36B	9142597
ML14XC1-030-230	TXV	28600	15.5	13	CX35-24B	EL180UH070XE36B	9142598
ML14XC1-030-230	TXV	28600	15.5	13	CX35-24B	EL180UH090E48B	9142599
ML14XC1-030-230	TXV	28600	15.5	13	CX35-24B	EL180UH090XE48B	9142600
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-24B	EL195UH045XE36B	9142601
ML14XC1-030-230	TXV	28800	15.1	12.5	CX35-24B	EL195UH070XE36B	9142602
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-24B	EL296UH045XE36B	9142603
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24B	EL296UH045XV36B	9142604
ML14XC1-030-230	TXV	28800	15.1	12.5	CX35-24B	EL296UH070XE36B	9142605
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24B	EL296UH070XV36B	9142606

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	28600	16	13	CX35-24B	SL280UH090V36B	9142607
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-24B	SLP98UH070XV36B	9142608
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-30/36A	EL180UH045E36A	9142609
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-30/36A	EL180UH045XE36A	9142610
ML14XC1-030-230	TXV	28400	15.5	12.5	CX35-30/36A	SL280UH070V36A	9142611
ML14XC1-030-230	TXV	28400	15.5	12.5	CX35-30/36A	SL280UH070XV36A	9142612
ML14XC1-030-230	TXV	28600	15.5	13	CX35-30/36B	EL180UH070E36B	9142613
ML14XC1-030-230	TXV	28600	15.5	13	CX35-30/36B	EL180UH070XE36B	9142614
ML14XC1-030-230	TXV	28600	16	13	CX35-30/36B	EL180UH090E48B	9142615
ML14XC1-030-230	TXV	28600	16	13	CX35-30/36B	EL180UH090XE48B	9142616
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL195UH045XE36B	9142617
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL195UH070XE36B	9142618
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL296UH045XE36B	9142619
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL296UH045XV36B	9142620
ML14XC1-030-230	TXV	28600	15.1	12.5	CX35-30/36B	EL296UH070XE36B	9142621
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-30/36B	EL296UH070XV36B	9142622
ML14XC1-030-230	TXV	28600	15.5	13	CX35-30/36B	SL280UH090V36B	9142623
ML14XC1-030-230	TXV	28600	15.5	12.5	CX35-30/36B	SLP98UH070XV36B	9142624
ML14XC1-030-230	TXV	28400	15.5	12.5	CX35-30/36C	EL195UH090XE48C	9142625
ML14XC1-030-230	TXV	28400	15.5	13	CX35-30/36C	EL296UH090XE48C	9142627
ML14XC1-030-230	TXV	28400	15.5	12.5	CX35-30/36C	EL296UH090XV36C	9142626
ML14XC1-030-230	TXV	28400	15.5	13	CX35-30/36C	SLP98UH090XV36C	9142628
ML14XC1-030-230	TXV	29200	15.5	13	CX35-30A	EL180UH045E36A	9142629
ML14XC1-030-230	TXV	29200	15.5	13	CX35-30A	EL180UH045XE36A	9142630
ML14XC1-030-230	TXV	29200	16	13	CX35-30A	SL280UH070V36A	9142631
ML14XC1-030-230	TXV	29200	16	13	CX35-30A	SL280UH070XV36A	9142632
ML14XC1-030-230	TXV	28600	14.25	12.2	CX35-30A		9142633
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	EL180UH070E36B	9142634
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	EL180UH070XE36B	9142635
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	EL180UH090E48B	9142636
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	EL180UH090XE48B	9142637
ML14XC1-030-230	TXV	29200	15.5	12.5	CX35-30B	EL195UH045XE36B	9142638
ML14XC1-030-230	TXV	29400	15.5	12.5	CX35-30B	EL195UH070XE36B	9142639
ML14XC1-030-230	TXV	29200	15.5	12.5	CX35-30B	EL296UH045XE36B	9142640
ML14XC1-030-230	TXV	29200	15.5	12.5	CX35-30B	EL296UH045XV36B	9142641
ML14XC1-030-230	TXV	29400	15.5	12.5	CX35-30B	EL296UH070XE36B	9142642
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	EL296UH070XV36B	9142643
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	SL280UH090V36B	9142644
ML14XC1-030-230	TXV	29200	16	13	CX35-30B	SLP98UH070XV36B	9142645
ML14XC1-030-230	TXV	28600	14.25	12.2	CX35-30B		9142646
ML14XC1-030-230	TXV	29400	16	13	CX35-36A	EL180UH045E36A	9142647
ML14XC1-030-230	TXV	29400	16	13	CX35-36A	EL180UH045XE36A	9142648
ML14XC1-030-230	TXV	29400	16	13	CX35-36A	SL280UH070V36A	9142649
ML14XC1-030-230	TXV	29400	16	13	CX35-36A	SL280UH070XV36A	9142650
ML14XC1-030-230	TXV	28800	14.5	12.2	CX35-36A		9142651
ML14XC1-030-230	TXV	29600	16	13	CX35-36B	EL180UH070E36B	9142652
ML14XC1-030-230	TXV	29600	16	13	CX35-36B	EL180UH070XE36B	9142653
ML14XC1-030-230	TXV	29600	16	13	CX35-36B	EL180UH090E48B	9142654
ML14XC1-030-230	TXV	29600	16	13	CX35-36B	EL180UH090XE48B	9142655

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-030-230	TXV	29400	15.5	13	CX35-36B	EL195UH045XE36B	9142656
ML14XC1-030-230	TXV	29600	16	13	CX35-36B	EL195UH070XE36B	9142657
ML14XC1-030-230	TXV	29400	15.5	13	CX35-36B	EL296UH045XE36B	9142658
ML14XC1-030-230	TXV	29400	15.5	13	CX35-36B	EL296UH045XV36B	9142659
ML14XC1-030-230	TXV	29600	16	13	CX35-36B	EL296UH070XE36B	9142660
ML14XC1-030-230	TXV	29400	16	13	CX35-36B	EL296UH070XV36B	9142661
ML14XC1-030-230	TXV	29400	16	13	CX35-36B	SL280UH090V36B	9142662
ML14XC1-030-230	TXV	29400	16	13	CX35-36B	SLP98UH070XV36B	9142663
ML14XC1-030-230	TXV	28800	14.5	12.2	CX35-36B		9142664
ML14XC1-030-230	TXV	29600	16	13	CX35-48B	EL180UH070E36B	9142665
ML14XC1-030-230	TXV	29600	16	13	CX35-48B	EL180UH070XE36B	9142666
ML14XC1-030-230	TXV	29600	16	13	CX35-48B	EL180UH090E48B	9142667
ML14XC1-030-230	TXV	29600	16	13	CX35-48B	EL180UH090XE48B	9142668
ML14XC1-030-230	TXV	29400	16	13	CX35-48B	EL195UH045XE36B	9142669
ML14XC1-030-230	TXV	29600	16	13	CX35-48B	EL195UH070XE36B	9142670
ML14XC1-030-230	TXV	29400	16	13	CX35-48B	EL296UH045XE36B	9142671
ML14XC1-030-230	TXV	29400	15.5	13	CX35-48B	EL296UH045XV36B	9142672
ML14XC1-030-230	TXV	29600	16	13	CX35-48B	EL296UH070XE36B	9142673
ML14XC1-030-230	TXV	29400	16	13	CX35-48B	EL296UH070XV36B	9142674
ML14XC1-030-230	TXV	29400	16	13	CX35-48B	SL280UH090V36B	9142675
ML14XC1-030-230	TXV	29400	16	13	CX35-48B	SLP98UH070XV36B	9142676
ML14XC1-030-230	TXV	29000	14.5	12.2	CX35-48B		9142677
ML14XC1-030-230	TXV	29400	16	13	CX35-48C	EL195UH090XE48C	9142678
ML14XC1-030-230	TXV	29400	16	13	CX35-48C	EL296UH090XE48C	9142679
ML14XC1-030-230	TXV	29400	16	13	CX35-48C	EL296UH090XV36C	9142680
ML14XC1-030-230	TXV	29200	16	13	CX35-48C	EL296UH090XV48C	9142681
ML14XC1-030-230	TXV	29400	16	13	CX35-48C	SLP98UH090XV36C	9142682
ML14XC1-030-230	TXV	29200	16	13	CX35-48C	SLP98UH090XV48C	9142683
ML14XC1-030-230	TXV	29000	14.5	12.2	CX35-48C		9142684
ML14XC1-030-230	TXV	28600	14.25	12.2	CX38-31B		10551404
ML14XC1-036-230	RFC	34200	14.25	12.2	CH33-31B		9143085
ML14XC1-036-230	RFC	35000	14.5	12.2	CH33-43B		9143147
ML14XC1-036-230	RFC	34200	14.25	12.2	CH33-44/48B		9143181
ML14XC1-036-230	RFC	34400	14.25	12.2	CH33-48		9143201
ML14XC1-036-230	RFC	34800	14.5	12.2	CH33-49		9143221
ML14XC1-036-230	RFC	34600	14.5	12.2	CH33-50/60C		9143241
ML14XC1-036-230	TXV	33600	15.1	12.2	C35-30/36A	EL180UH045E36A	9142867
ML14XC1-036-230	TXV	33600	15.1	12.2	C35-30/36A	EL180UH045XE36A	9142868
ML14XC1-036-230	TXV	33400	15.1	12.5	C35-30/36A	SL280UH070V36A	9142869
ML14XC1-036-230	TXV	33400	15.1	12.5	C35-30/36A	SL280UH070XV36A	9142870
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36B	EL180UH070E36B	9142871
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36B	EL180UH070XE36B	9142872
ML14XC1-036-230	TXV	34000	15.5	12.5	C35-30/36B	EL180UH090E48B	9142873
ML14XC1-036-230	TXV	34000	15.5	12.5	C35-30/36B	EL180UH090XE48B	9142874
ML14XC1-036-230	TXV	33200	15.1	12.5	C35-30/36B	EL195UH045XE36B	9142875
ML14XC1-036-230	TXV	33200	15.1	12.5	C35-30/36B	EL296UH045XE36B	9142876
ML14XC1-036-230	TXV	33200	15.1	12.2	C35-30/36B	EL296UH045XV36B	9142877
ML14XC1-036-230	TXV	33400	15.1	12.5	C35-30/36B	EL296UH070XV36B	9142878
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090V36B	9142879

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	33800	15.5	12.5	C35-30/36B	SL280UH090V48B	9142880
ML14XC1-036-230	TXV	33800	15.5	12.5	C35-30/36B	SL280UH090XV48B	9142881
ML14XC1-036-230	TXV	33400	15.1	12.5	C35-30/36B	SLP98UH070XV36B	9142882
ML14XC1-036-230	TXV	34000	15.5	12.5	C35-30/36C	EL180UH090E60C	9142883
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL180UH110E60C	9142884
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL180UH110XE60C	9142885
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL195UH090XE48C	9142886
ML14XC1-036-230	TXV	34000	15.5	12.5	C35-30/36C	EL195UH110XE60C	9142887
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH090XE48C	9142888
ML14XC1-036-230	TXV	33800	15.5	12.5	C35-30/36C	EL296UH090XV36C	9142889
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH090XV48C	9142890
ML14XC1-036-230	TXV	34000	15.5	12.5	C35-30/36C	EL296UH110XE60C	9142891
ML14XC1-036-230	TXV	33800	15.5	12.5	C35-30/36C	EL296UH110XV48C	9142892
ML14XC1-036-230	TXV	33800	15.5	12.5	C35-30/36C	SLP98UH090XV36C	9142893
ML14XC1-036-230	TXV	33600	15.5	12.5	C35-30/36C	SLP98UH090XV48C	9142894
ML14XC1-036-230	TXV	34000	15.5	12.5	C35-30/36C	SLP98UH110XV60C	9142895
ML14XC1-036-230	TXV	34800	15.5	12.5	C35-30A	EL180UH045E36A	9142896
ML14XC1-036-230	TXV	34800	15.5	12.5	C35-30A	EL180UH045XE36A	9142897
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-30A	SL280UH070V36A	9142898
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-30A	SL280UH070XV36A	9142899
ML14XC1-036-230	TXV	34400	16	13	C35-30B	EL180UH070E36B	9142900
ML14XC1-036-230	TXV	34400	16	13	C35-30B	EL180UH070XE36B	9142901
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-30B	EL180UH090E48B	9142902
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-30B	EL180UH090XE48B	9142903
ML14XC1-036-230	TXV	34400	14.5	12.2	C35-30B	EL195UH045XE36B	9142904
ML14XC1-036-230	TXV	34400	15.5	12.5	C35-30B	EL195UH070XE36B	9142905
ML14XC1-036-230	TXV	34400	14.5	12.2	C35-30B	EL296UH045XE36B	9142906
ML14XC1-036-230	TXV	34600	15.1	12.5	C35-30B	EL296UH045XV36B	9142907
ML14XC1-036-230	TXV	34400	15.5	12.5	C35-30B	EL296UH070XE36B	9142908
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-30B	EL296UH070XV36B	9142909
ML14XC1-036-230	TXV	34800	16	13	C35-30B	SL280UH090V36B	9142910
ML14XC1-036-230	TXV	34800	16	13	C35-30B	SL280UH090V48B	9142911
ML14XC1-036-230	TXV	34800	16	13	C35-30B	SL280UH090XV48B	9142912
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-30B	SLP98UH070XV36B	9142913
ML14XC1-036-230	TXV	35200	15.5	12.5	C35-36A	EL180UH045E36A	9142914
ML14XC1-036-230	TXV	35200	15.5	12.5	C35-36A	EL180UH045XE36A	9142915
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36A	SL280UH070V36A	9142916
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36A	SL280UH070XV36A	9142917
ML14XC1-036-230	TXV	34600	14.5	12.2	C35-36A		9142918
ML14XC1-036-230	TXV	35000	16	13	C35-36B	EL180UH070E36B	9142919
ML14XC1-036-230	TXV	35000	16	13	C35-36B	EL180UH070XE36B	9142920
ML14XC1-036-230	TXV	35400	16	13	C35-36B	EL180UH090E48B	9142921
ML14XC1-036-230	TXV	35400	16	13	C35-36B	EL180UH090XE48B	9142922
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-36B	EL195UH045XE36B	9142923
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36B	EL195UH070XE36B	9142924
ML14XC1-036-230	TXV	34600	15.5	12.5	C35-36B	EL296UH045XE36B	9142925
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36B	EL296UH045XV36B	9142926
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36B	EL296UH070XE36B	9142927
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36B	EL296UH070XV36B	9142928

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	35200	16	13	C35-36B	SL280UH090V36B	9142929
ML14XC1-036-230	TXV	35200	16	13	C35-36B	SL280UH090V48B	9142930
ML14XC1-036-230	TXV	35200	16	13	C35-36B	SL280UH090XV48B	9142931
ML14XC1-036-230	TXV	35000	15.5	12.5	C35-36B	SLP98UH070XV36B	9142932
ML14XC1-036-230	TXV	34600	14.5	12.2	C35-36B		9142933
ML14XC1-036-230	TXV	35200	16	13	C35-48B	EL180UH070E36B	9142934
ML14XC1-036-230	TXV	35200	16	13	C35-48B	EL180UH070XE36B	9142935
ML14XC1-036-230	TXV	35600	16	13	C35-48B	EL180UH090E48B	9142936
ML14XC1-036-230	TXV	35600	16	13	C35-48B	EL180UH090XE48B	9142937
ML14XC1-036-230	TXV	34800	15.5	12.5	C35-48B	EL195UH045XE36B	9142938
ML14XC1-036-230	TXV	35200	16	13	C35-48B	EL195UH070XE36B	9142939
ML14XC1-036-230	TXV	34800	15.5	12.5	C35-48B	EL296UH045XE36B	9142940
ML14XC1-036-230	TXV	35200	15.5	12.5	C35-48B	EL296UH045XV36B	9142941
ML14XC1-036-230	TXV	35200	16	13	C35-48B	EL296UH070XE36B	9142942
ML14XC1-036-230	TXV	35200	15.5	12.5	C35-48B	EL296UH070XV36B	9142943
ML14XC1-036-230	TXV	35400	16	13	C35-48B	SL280UH090V36B	9142944
ML14XC1-036-230	TXV	35400	16	13	C35-48B	SL280UH090V48B	9142945
ML14XC1-036-230	TXV	35400	16	13	C35-48B	SL280UH090XV48B	9142946
ML14XC1-036-230	TXV	35200	15.5	12.5	C35-48B	SLP98UH070XV36B	9142947
ML14XC1-036-230	TXV	34800	14.5	12.2	C35-48B		9142948
ML14XC1-036-230	TXV	35600	16	13	C35-48C	EL180UH090E60C	9142949
ML14XC1-036-230	TXV	35200	16	13	C35-48C	EL180UH110E60C	9142950
ML14XC1-036-230	TXV	35200	16	13	C35-48C	EL180UH110XE60C	9142951
ML14XC1-036-230	TXV	35400	16	13	C35-48C	EL195UH090XE48C	9142952
ML14XC1-036-230	TXV	35600	16	13	C35-48C	EL195UH110XE60C	9142953
ML14XC1-036-230	TXV	35400	16	13	C35-48C	EL296UH090XE48C	9142954
ML14XC1-036-230	TXV	35400	16	13	C35-48C	EL296UH090XV36C	9142955
ML14XC1-036-230	TXV	35200	16	13	C35-48C	EL296UH090XV48C	9142956
ML14XC1-036-230	TXV	35600	16	13	C35-48C	EL296UH110XE60C	9142957
ML14XC1-036-230	TXV	35400	16	13	C35-48C	EL296UH110XV48C	9142958
ML14XC1-036-230	TXV	35800	16	13	C35-48C	EL296UH110XV60C	9142959
ML14XC1-036-230	TXV	35800	16	13	C35-48C	SL280UH090V60C	9142960
ML14XC1-036-230	TXV	35800	16	13	C35-48C	SL280UH090XV60C	9142961
ML14XC1-036-230	TXV	35800	16	13	C35-48C	SL280UH110V60C	9142962
ML14XC1-036-230	TXV	35800	16	13	C35-48C	SL280UH110XV60C	9142963
ML14XC1-036-230	TXV	35400	16	13	C35-48C	SLP98UH090XV36C	9142964
ML14XC1-036-230	TXV	35200	16	13	C35-48C	SLP98UH090XV48C	9142965
ML14XC1-036-230	TXV	35800	16	13	C35-48C	SLP98UH110XV60C	9142966
ML14XC1-036-230	TXV	34800	14.5	12.2	C35-48C		9142967
ML14XC1-036-230	TXV	36000	16	13	C35-49C	EL180UH090E60C	9142968
ML14XC1-036-230	TXV	35600	16	13	C35-49C	EL180UH110E60C	9142969
ML14XC1-036-230	TXV	35600	16	13	C35-49C	EL180UH110XE60C	9142970
ML14XC1-036-230	TXV	35600	16	13	C35-49C	EL195UH090XE48C	9142971
ML14XC1-036-230	TXV	36000	16	13	C35-49C	EL195UH110XE60C	9142972
ML14XC1-036-230	TXV	35600	16	13	C35-49C	EL296UH090XE48C	9142973
ML14XC1-036-230	TXV	35800	16	13	C35-49C	EL296UH090XV36C	9142974
ML14XC1-036-230	TXV	35600	16	13	C35-49C	EL296UH090XV48C	9142975
ML14XC1-036-230	TXV	36000	16	13	C35-49C	EL296UH110XE60C	9142976
ML14XC1-036-230	TXV	35800	16	13	C35-49C	EL296UH110XV48C	9142977

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	36000	16	13	C35-49C	EL296UH110XV60C	9142978
ML14XC1-036-230	TXV	36000	16	13	C35-49C	SL280UH090V60C	9142979
ML14XC1-036-230	TXV	36000	16	13	C35-49C	SL280UH090XV60C	9142980
ML14XC1-036-230	TXV	36000	16	13	C35-49C	SL280UH110V60C	9142981
ML14XC1-036-230	TXV	36000	16	13	C35-49C	SL280UH110XV60C	9142982
ML14XC1-036-230	TXV	35800	16	13	C35-49C	SLP98UH090XV36C	9142983
ML14XC1-036-230	TXV	35600	16	13	C35-49C	SLP98UH090XV48C	9142984
ML14XC1-036-230	TXV	36000	16	13	C35-49C	SLP98UH110XV60C	9142985
ML14XC1-036-230	TXV	35200	14.5	12.2	C35-49C		9142986
ML14XC1-036-230	TXV	35400	16	13	C35-50/60C	EL180UH090E60C	9142987
ML14XC1-036-230	TXV	35000	16	13	C35-50/60C	EL180UH110E60C	9142988
ML14XC1-036-230	TXV	35000	16	13	C35-50/60C	EL180UH110XE60C	9142989
ML14XC1-036-230	TXV	35200	16	13	C35-50/60C	EL195UH090XE48C	9142990
ML14XC1-036-230	TXV	35400	16	13	C35-50/60C	EL195UH110XE60C	9142991
ML14XC1-036-230	TXV	35200	16	13	C35-50/60C	EL296UH090XE48C	9142992
ML14XC1-036-230	TXV	35200	16	13	C35-50/60C	EL296UH090XV36C	9142993
ML14XC1-036-230	TXV	35000	16	13	C35-50/60C	EL296UH090XV48C	9142994
ML14XC1-036-230	TXV	35400	16	13	C35-50/60C	EL296UH110XE60C	9142995
ML14XC1-036-230	TXV	35200	16	13	C35-50/60C	EL296UH110XV48C	9142996
ML14XC1-036-230	TXV	35600	16	13	C35-50/60C	EL296UH110XV60C	9142997
ML14XC1-036-230	TXV	35600	16	13	C35-50/60C	SL280UH090V60C	9142998
ML14XC1-036-230	TXV	35600	16	13	C35-50/60C	SL280UH090XV60C	9142999
ML14XC1-036-230	TXV	35400	16	13	C35-50/60C	SL280UH110V60C	9143000
ML14XC1-036-230	TXV	35400	16	13	C35-50/60C	SL280UH110XV60C	9143001
ML14XC1-036-230	TXV	35200	16	13	C35-50/60C	SLP98UH090XV36C	9143002
ML14XC1-036-230	TXV	35000	16	13	C35-50/60C	SLP98UH090XV48C	9143003
ML14XC1-036-230	TXV	35600	16	13	C35-50/60C	SLP98UH110XV60C	9143004
ML14XC1-036-230	TXV	34600	14.5	12.2	C35-50/60C		9143005
ML14XC1-036-230	TXV	34600	16	13	CBA27UHE-036		10259423
ML14XC1-036-230	TXV	35400	16	13	CBA27UHE-042		10259424
ML14XC1-036-230	TXV	34600	15.1	12.5	CBX25UH-042		9143006
ML14XC1-036-230	TXV	33800	15.1	12.5	CBX25UHV-036		9143007
ML14XC1-036-230	TXV	35000	16	13	CBX25UHV-042		9143008
ML14XC1-036-230	TXV	34400	16	13	CBX27UH-036		9143009
ML14XC1-036-230	TXV	35200	16	13	CBX27UH-042		9143010
ML14XC1-036-230	TXV	33800	15.1	12.5	CBX32M-030		9143011
ML14XC1-036-230	TXV	34000	14.5	12.2	CBX32M-036		9143012
ML14XC1-036-230	TXV	34000	14.5	12.2	CBX32M-042		9143013
ML14XC1-036-230	TXV	34600	15	12.5	CBX32M-048		9143014
ML14XC1-036-230	TXV	34200	15.1	12.5	CBX32MV-036		9143015
ML14XC1-036-230	TXV	35200	16	13	CBX32MV-048		9143016
ML14XC1-036-230	TXV	34400	15.5	12.5	CBX40UHV-036		9143017
ML14XC1-036-230	TXV	35000	16	13	CBX40UHV-042		9143018
ML14XC1-036-230	TXV	35200	16	13	CBX40UHV-048		9143019
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	EL180UH045E36A	9143020
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	EL180UH045XE36A	9143021
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070E36B	9143022
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070XE36B	9143023
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090E48B	9143024

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090XE48B	9143025
ML14XC1-036-230	TXV	33400	15.1	12.5	CH23-41	EL195UH045XE36B	9143026
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	EL195UH070XE36B	9143027
ML14XC1-036-230	TXV	33400	15.1	12.5	CH23-41	EL296UH045XE36B	9143028
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH045XV36B	9143029
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH070XE36B	9143030
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH070XV36B	9143031
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-41	SL280UH090V48B	9143032
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-41	SL280UH090XV48B	9143033
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-41	SLP98UH070XV36B	9143034
ML14XC1-036-230	TXV	33600	15.1	12.2	CH23-51	EL180UH045E36A	9143035
ML14XC1-036-230	TXV	33600	15.1	12.2	CH23-51	EL180UH045XE36A	9143036
ML14XC1-036-230	TXV	33800	16	13	CH23-51	EL180UH070E36B	9143037
ML14XC1-036-230	TXV	33800	16	13	CH23-51	EL180UH070XE36B	9143038
ML14XC1-036-230	TXV	34200	15.5	12.5	CH23-51	EL180UH090E48B	9143039
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH090E60C	9143040
ML14XC1-036-230	TXV	34200	15.5	12.5	CH23-51	EL180UH090XE48B	9143041
ML14XC1-036-230	TXV	34000	16	13	CH23-51	EL180UH110E60C	9143042
ML14XC1-036-230	TXV	34000	16	13	CH23-51	EL180UH110XE60C	9143043
ML14XC1-036-230	TXV	33400	15.1	12.5	CH23-51	EL195UH045XE36B	9143044
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-51	EL195UH070XE36B	9143045
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	EL195UH090XE48C	9143046
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	EL195UH110XE60C	9143047
ML14XC1-036-230	TXV	33400	15.1	12.5	CH23-51	EL296UH045XE36B	9143048
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH045XV36B	9143049
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH070XE36B	9143050
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH070XV36B	9143051
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH090XE48C	9143052
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-51	EL296UH090XV36C	9143053
ML14XC1-036-230	TXV	33600	15.5	12.5	CH23-51	EL296UH090XV48C	9143054
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH110XE60C	9143055
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-51	EL296UH110XV48C	9143056
ML14XC1-036-230	TXV	34200	15.5	12.5	CH23-51	EL296UH110XV60C	9143057
ML14XC1-036-230	TXV	33800	16	13	CH23-51	SL280UH090V36B	9143058
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-51	SL280UH090V48B	9143059
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-51	SL280UH090XV48B	9143060
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	SL280UH110V60C	9143061
ML14XC1-036-230	TXV	34000	15.5	12.5	CH23-51	SL280UH110XV60C	9143062
ML14XC1-036-230	TXV	33600	15.1	12.5	CH23-51	SLP98UH070XV36B	9143063
ML14XC1-036-230	TXV	33800	15.5	12.5	CH23-51	SLP98UH090XV36C	9143064
ML14XC1-036-230	TXV	33600	15.5	12.5	CH23-51	SLP98UH090XV48C	9143065
ML14XC1-036-230	TXV	34200	15.5	12.5	CH23-51	SLP98UH110XV60C	9143066
ML14XC1-036-230	TXV	34400	15.1	12.5	CH33-31A	EL180UH045E36A	9143067
ML14XC1-036-230	TXV	34400	15.1	12.5	CH33-31A	EL180UH045XE36A	9143068
ML14XC1-036-230	TXV	34600	15.1	12.5	CH33-31A	SL280UH070V36A	9143069
ML14XC1-036-230	TXV	34600	15.1	12.5	CH33-31A	SL280UH070XV36A	9143070
ML14XC1-036-230	TXV	34600	16	13	CH33-31B	EL180UH070E36B	9143071
ML14XC1-036-230	TXV	34600	16	13	CH33-31B	EL180UH070XE36B	9143072
ML14XC1-036-230	TXV	34800	16	13	CH33-31B	EL180UH090E48B	9143073

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	34800	16	13	CH33-31B	EL180UH090XE48B	9143074
ML14XC1-036-230	TXV	34600	15.1	12.2	CH33-31B	EL195UH045XE36B	9143075
ML14XC1-036-230	TXV	34600	15.5	12.5	CH33-31B	EL195UH070XE36B	9143076
ML14XC1-036-230	TXV	34600	15.1	12.2	CH33-31B	EL296UH045XE36B	9143077
ML14XC1-036-230	TXV	34800	15.5	12.5	CH33-31B	EL296UH045XV36B	9143078
ML14XC1-036-230	TXV	34600	15.5	12.5	CH33-31B	EL296UH070XE36B	9143079
ML14XC1-036-230	TXV	34800	15.5	12.5	CH33-31B	EL296UH070XV36B	9143080
ML14XC1-036-230	TXV	35000	16	13	CH33-31B	SL280UH090V36B	9143081
ML14XC1-036-230	TXV	35000	16	13	CH33-31B	SL280UH090V48B	9143082
ML14XC1-036-230	TXV	35000	16	13	CH33-31B	SL280UH090XV48B	9143083
ML14XC1-036-230	TXV	34800	15.5	12.5	CH33-31B	SLP98UH070XV36B	9143084
ML14XC1-036-230	TXV	34400	14.5	12.2	CH33-31B		9143086
ML14XC1-036-230	TXV	33400	14.5	12.2	CH33-36A	EL180UH045E36A	9143087
ML14XC1-036-230	TXV	33400	14.5	12.2	CH33-36A	EL180UH045XE36A	9143088
ML14XC1-036-230	TXV	33400	14.5	12.2	CH33-36A	SL280UH070V36A	9147553
ML14XC1-036-230	TXV	33400	14.5	12.2	CH33-36A	SL280UH070XV36A	9147554
ML14XC1-036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070E36B	9143089
ML14XC1-036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070XE36B	9143090
ML14XC1-036-230	TXV	33600	15.5	12.5	CH33-36B	EL180UH090E48B	9143091
ML14XC1-036-230	TXV	33600	15.5	12.5	CH33-36B	EL180UH090XE48B	9143092
ML14XC1-036-230	TXV	33000	14.5	12.2	CH33-36B	EL195UH045XE36B	9143093
ML14XC1-036-230	TXV	33200	15.1	12.5	CH33-36B	EL195UH070XE36B	9143094
ML14XC1-036-230	TXV	33000	14.5	12.2	CH33-36B	EL296UH045XE36B	9143095
ML14XC1-036-230	TXV	33400	14.5	12.2	CH33-36B	EL296UH045XV36B	9143096
ML14XC1-036-230	TXV	33200	15.1	12.5	CH33-36B	EL296UH070XE36B	9143097
ML14XC1-036-230	TXV	33200	15.1	12.5	CH33-36B	EL296UH070XV36B	9143098
ML14XC1-036-230	TXV	33400	15.5	12.5	CH33-36B	SL280UH090V36B	9143099
ML14XC1-036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090V48B	9143100
ML14XC1-036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090XV48B	9143101
ML14XC1-036-230	TXV	33200	15.1	12.5	CH33-36B	SLP98UH070XV36B	9143102
ML14XC1-036-230	TXV	34200	16	13	CH33-36C	EL180UH090E60C	9143103
ML14XC1-036-230	TXV	34000	16	13	CH33-36C	EL180UH110E60C	9143104
ML14XC1-036-230	TXV	34000	16	13	CH33-36C	EL180UH110XE60C	9143105
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	EL195UH090XE48C	9143106
ML14XC1-036-230	TXV	34200	15.5	12.5	CH33-36C	EL195UH110XE60C	9143107
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XE48C	9143108
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XV36C	9143109
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XV48C	9143110
ML14XC1-036-230	TXV	34200	15.5	12.5	CH33-36C	EL296UH110XE60C	9143111
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH110XV48C	9143112
ML14XC1-036-230	TXV	34400	15.5	12.5	CH33-36C	EL296UH110XV60C	9143113
ML14XC1-036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH110V60C	9143114
ML14XC1-036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH110XV60C	9143115
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	SLP98UH090XV36C	9143116
ML14XC1-036-230	TXV	34000	15.5	12.5	CH33-36C	SLP98UH090XV48C	9143117
ML14XC1-036-230	TXV	34400	15.5	12.5	CH33-36C	SLP98UH110XV60C	9143118
ML14XC1-036-230	TXV	34200	16	13	CH33-42B	EL180UH070E36B	9143119
ML14XC1-036-230	TXV	34200	16	13	CH33-42B	EL180UH070XE36B	9143120
ML14XC1-036-230	TXV	34400	15.5	12.5	CH33-42B	EL180UH090E48B	9143121

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	34400	15.5	12.5	CH33-42B	EL180UH090XE48B	9143122
ML14XC1-036-230	TXV	34200	14.5	12.2	CH33-42B	EL195UH045XE36B	9143123
ML14XC1-036-230	TXV	34000	15.1	12.5	CH33-42B	EL195UH070XE36B	9143124
ML14XC1-036-230	TXV	34200	14.5	12.2	CH33-42B	EL296UH045XE36B	9143125
ML14XC1-036-230	TXV	34400	15.1	12.5	CH33-42B	EL296UH045XV36B	9143126
ML14XC1-036-230	TXV	34000	15.1	12.5	CH33-42B	EL296UH070XE36B	9143127
ML14XC1-036-230	TXV	34400	15.1	12.5	CH33-42B	EL296UH070XV36B	9143128
ML14XC1-036-230	TXV	34600	16	13	CH33-42B	SL280UH090V36B	9143129
ML14XC1-036-230	TXV	34600	15.5	12.5	CH33-42B	SL280UH090V48B	9143130
ML14XC1-036-230	TXV	34600	15.5	12.5	CH33-42B	SL280UH090XV48B	9143131
ML14XC1-036-230	TXV	34400	15.1	12.5	CH33-42B	SLP98UH070XV36B	9143132
ML14XC1-036-230	TXV	35600	16	13	CH33-43B	EL180UH070E36B	9143133
ML14XC1-036-230	TXV	35600	16	13	CH33-43B	EL180UH070XE36B	9143134
ML14XC1-036-230	TXV	35800	16	13	CH33-43B	EL180UH090E48B	9143135
ML14XC1-036-230	TXV	35800	16	13	CH33-43B	EL180UH090XE48B	9143136
ML14XC1-036-230	TXV	35600	15.5	12.5	CH33-43B	EL195UH045XE36B	9143137
ML14XC1-036-230	TXV	35400	16	13	CH33-43B	EL195UH070XE36B	9143138
ML14XC1-036-230	TXV	35600	15.5	12.5	CH33-43B	EL296UH045XE36B	9143139
ML14XC1-036-230	TXV	35800	16	13	CH33-43B	EL296UH045XV36B	9143140
ML14XC1-036-230	TXV	35400	16	13	CH33-43B	EL296UH070XE36B	9143141
ML14XC1-036-230	TXV	35800	16	13	CH33-43B	EL296UH070XV36B	9143142
ML14XC1-036-230	TXV	36000	16	13	CH33-43B	SL280UH090V36B	9143143
ML14XC1-036-230	TXV	36000	16	13	CH33-43B	SL280UH090V48B	9143144
ML14XC1-036-230	TXV	36000	16	13	CH33-43B	SL280UH090XV48B	9143145
ML14XC1-036-230	TXV	35800	16	13	CH33-43B	SLP98UH070XV36B	9143146
ML14XC1-036-230	TXV	35400	15.1	12.5	CH33-43B		9143148
ML14XC1-036-230	TXV	35600	16	13	CH33-43C	EL180UH090E60C	9143149
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	EL180UH110E60C	9143150
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	EL180UH110XE60C	9143151
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	EL195UH090XE48C	9143152
ML14XC1-036-230	TXV	35600	16	13	CH33-43C	EL195UH110XE60C	9143153
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	EL296UH090XE48C	9143154
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	EL296UH090XV36C	9143155
ML14XC1-036-230	TXV	35200	16	13	CH33-43C	EL296UH090XV48C	9143156
ML14XC1-036-230	TXV	35600	16	13	CH33-43C	EL296UH110XE60C	9143157
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	EL296UH110XV48C	9143158
ML14XC1-036-230	TXV	35800	16	13	CH33-43C	EL296UH110XV60C	9143159
ML14XC1-036-230	TXV	35800	16	13	CH33-43C	SL280UH090V60C	9143160
ML14XC1-036-230	TXV	35800	16	13	CH33-43C	SL280UH090XV60C	9143161
ML14XC1-036-230	TXV	35600	16	13	CH33-43C	SL280UH110V60C	9143162
ML14XC1-036-230	TXV	35600	16	13	CH33-43C	SL280UH110XV60C	9143163
ML14XC1-036-230	TXV	35400	16	13	CH33-43C	SLP98UH090XV36C	9143164
ML14XC1-036-230	TXV	35200	16	13	CH33-43C	SLP98UH090XV48C	9143165
ML14XC1-036-230	TXV	35800	16	13	CH33-43C	SLP98UH110XV60C	9143166
ML14XC1-036-230	TXV	34600	16	13	CH33-44/48B	EL180UH070E36B	9143167
ML14XC1-036-230	TXV	34600	16	13	CH33-44/48B	EL180UH070XE36B	9143168
ML14XC1-036-230	TXV	35000	16	13	CH33-44/48B	EL180UH090E48B	9143169
ML14XC1-036-230	TXV	35000	16	13	CH33-44/48B	EL180UH090XE48B	9143170
ML14XC1-036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL195UH045XE36B	9143171

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL195UH070XE36B	9143172
ML14XC1-036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL296UH045XE36B	9143173
ML14XC1-036-230	TXV	34800	15.5	12.5	CH33-44/48B	EL296UH045XV36B	9143174
ML14XC1-036-230	TXV	34800	15.1	12.5	CH33-44/48B	EL296UH070XE36B	9143175
ML14XC1-036-230	TXV	35000	15.5	12.5	CH33-44/48B	EL296UH070XV36B	9143176
ML14XC1-036-230	TXV	35000	16	13	CH33-44/48B	SL280UH090V36B	9143177
ML14XC1-036-230	TXV	35000	16	13	CH33-44/48B	SL280UH090V48B	9143178
ML14XC1-036-230	TXV	35000	16	13	CH33-44/48B	SL280UH090XV48B	9143179
ML14XC1-036-230	TXV	35000	15.5	12.5	CH33-44/48B	SLP98UH070XV36B	9143180
ML14XC1-036-230	TXV	34600	14.5	12.2	CH33-44/48B		9143182
ML14XC1-036-230	TXV	35400	16	13	CH33-48C	EL180UH090E60C	9143183
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	EL180UH110E60C	9143184
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	EL180UH110XE60C	9143185
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	EL195UH090XE48C	9143186
ML14XC1-036-230	TXV	35400	16	13	CH33-48C	EL195UH110XE60C	9143187
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	EL296UH090XE48C	9143188
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	EL296UH090XV36C	9143189
ML14XC1-036-230	TXV	35000	16	13	CH33-48C	EL296UH090XV48C	9143190
ML14XC1-036-230	TXV	35400	16	13	CH33-48C	EL296UH110XE60C	9143191
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	EL296UH110XV48C	9143192
ML14XC1-036-230	TXV	35600	16	13	CH33-48C	EL296UH110XV60C	9143193
ML14XC1-036-230	TXV	35600	16	13	CH33-48C	SL280UH090V60C	9143194
ML14XC1-036-230	TXV	35600	16	13	CH33-48C	SL280UH090XV60C	9143195
ML14XC1-036-230	TXV	35400	16	13	CH33-48C	SL280UH110V60C	9143196
ML14XC1-036-230	TXV	35400	16	13	CH33-48C	SL280UH110XV60C	9143197
ML14XC1-036-230	TXV	35200	16	13	CH33-48C	SLP98UH090XV36C	9143198
ML14XC1-036-230	TXV	35000	16	13	CH33-48C	SLP98UH090XV48C	9143199
ML14XC1-036-230	TXV	35600	16	13	CH33-48C	SLP98UH110XV60C	9143200
ML14XC1-036-230	TXV	34600	14.5	12.2	CH33-48C		9143202
ML14XC1-036-230	TXV	36000	16	13	CH33-49	EL180UH090E60C	9143203
ML14XC1-036-230	TXV	35800	16	13	CH33-49	EL180UH110E60C	9143204
ML14XC1-036-230	TXV	35800	16	13	CH33-49	EL180UH110XE60C	9143205
ML14XC1-036-230	TXV	35800	16	13	CH33-49	EL195UH090XE48C	9143206
ML14XC1-036-230	TXV	36000	16	13	CH33-49	EL195UH110XE60C	9143207
ML14XC1-036-230	TXV	35800	16	13	CH33-49	EL296UH090XE48C	9143208
ML14XC1-036-230	TXV	35800	16	13	CH33-49	EL296UH090XV36C	9143209
ML14XC1-036-230	TXV	35600	16	13	CH33-49	EL296UH090XV48C	9143210
ML14XC1-036-230	TXV	36000	16	13	CH33-49	EL296UH110XE60C	9143211
ML14XC1-036-230	TXV	36000	16	13	CH33-49	EL296UH110XV48C	9143212
ML14XC1-036-230	TXV	36000	16	13	CH33-49	EL296UH110XV60C	9143213
ML14XC1-036-230	TXV	36000	16	13	CH33-49	SL280UH090V60C	9143214
ML14XC1-036-230	TXV	36000	16	13	CH33-49	SL280UH090XV60C	9143215
ML14XC1-036-230	TXV	36000	16	13	CH33-49	SL280UH110V60C	9143216
ML14XC1-036-230	TXV	36000	16	13	CH33-49	SL280UH110XV60C	9143217
ML14XC1-036-230	TXV	35800	16	13	CH33-49	SLP98UH090XV36C	9143218
ML14XC1-036-230	TXV	35600	16	13	CH33-49	SLP98UH090XV48C	9143219
ML14XC1-036-230	TXV	36000	16	13	CH33-49	SLP98UH110XV60C	9143220
ML14XC1-036-230	TXV	35200	15.1	12.2	CH33-49		9143222
ML14XC1-036-230	TXV	35800	16	13	CH33-50/60C	EL180UH090E60C	9143223

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	EL180UH110E60C	9143224
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	EL180UH110XE60C	9143225
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	EL195UH090XE48C	9143226
ML14XC1-036-230	TXV	35800	16	13	CH33-50/60C	EL195UH110XE60C	9143227
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	EL296UH090XE48C	9143228
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	EL296UH090XV36C	9143230
ML14XC1-036-230	TXV	35400	16	13	CH33-50/60C	EL296UH090XV48C	9143231
ML14XC1-036-230	TXV	35800	16	13	CH33-50/60C	EL296UH110XE60C	9143229
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	EL296UH110XV48C	9143232
ML14XC1-036-230	TXV	36000	16	13	CH33-50/60C	EL296UH110XV60C	9143233
ML14XC1-036-230	TXV	36000	16	13	CH33-50/60C	SL280UH090V60C	9143234
ML14XC1-036-230	TXV	36000	16	13	CH33-50/60C	SL280UH090XV60C	9143235
ML14XC1-036-230	TXV	36000	16	13	CH33-50/60C	SL280UH110V60C	9143236
ML14XC1-036-230	TXV	36000	16	13	CH33-50/60C	SL280UH110XV60C	9143237
ML14XC1-036-230	TXV	35600	16	13	CH33-50/60C	SLP98UH090XV36C	9143238
ML14XC1-036-230	TXV	35400	16	13	CH33-50/60C	SLP98UH090XV48C	9143239
ML14XC1-036-230	TXV	36000	16	13	CH33-50/60C	SLP98UH110XV60C	9143240
ML14XC1-036-230	TXV	35000	14.5	12.2	CH33-50/60C		9143242
ML14XC1-036-230	TXV	34600	15.1	12.5	CH35-30A	EL180UH045E36A	9143243
ML14XC1-036-230	TXV	34600	15.1	12.5	CH35-30A	EL180UH045XE36A	9143244
ML14XC1-036-230	TXV	34600	15.1	12.5	CH35-30A	SL280UH070V36A	9143245
ML14XC1-036-230	TXV	34600	15.1	12.5	CH35-30A	SL280UH070XV36A	9143246
ML14XC1-036-230	TXV	35200	15.5	12.5	CH35-30B	EL180UH070E36B	9143247
ML14XC1-036-230	TXV	35200	15.5	12.5	CH35-30B	EL180UH070XE36B	9143248
ML14XC1-036-230	TXV	35000	16	13	CH35-30B	EL180UH090E48B	9143249
ML14XC1-036-230	TXV	35000	16	13	CH35-30B	EL180UH090XE48B	9143250
ML14XC1-036-230	TXV	34800	15.1	12.5	CH35-30B	EL195UH045XE36B	9143251
ML14XC1-036-230	TXV	34800	15.1	12.5	CH35-30B	EL195UH070XE36B	9143252
ML14XC1-036-230	TXV	34800	15.1	12.5	CH35-30B	EL296UH045XE36B	9143253
ML14XC1-036-230	TXV	35000	15.5	12.5	CH35-30B	EL296UH045XV36B	9143254
ML14XC1-036-230	TXV	34800	15.1	12.5	CH35-30B	EL296UH070XE36B	9143255
ML14XC1-036-230	TXV	35000	15.5	12.5	CH35-30B	EL296UH070XV36B	9143256
ML14XC1-036-230	TXV	35200	16	13	CH35-30B	SL280UH090V36B	9143257
ML14XC1-036-230	TXV	35200	16	13	CH35-30B	SL280UH090V48B	9143258
ML14XC1-036-230	TXV	35200	16	13	CH35-30B	SL280UH090XV48B	9143259
ML14XC1-036-230	TXV	35000	15.5	12.5	CH35-30B	SLP98UH070XV36B	9143260
ML14XC1-036-230	TXV	34600	14.5	12.2	CH35-30B		9143261
ML14XC1-036-230	TXV	33200	14.5	12.2	CH35-36A	EL180UH045E36A	9143262
ML14XC1-036-230	TXV	33200	14.5	12.2	CH35-36A	EL180UH045XE36A	9143263
ML14XC1-036-230	TXV	33400	14.5	12.2	CH35-36A	SL280UH070V36A	9143264
ML14XC1-036-230	TXV	33400	14.5	12.2	CH35-36A	SL280UH070XV36A	9143265
ML14XC1-036-230	TXV	33600	15.5	12.5	CH35-36B	EL180UH070E36B	9143266
ML14XC1-036-230	TXV	33600	15.5	12.5	CH35-36B	EL180UH070XE36B	9143267
ML14XC1-036-230	TXV	33600	15.1	12.5	CH35-36B	EL180UH090E48B	9143268
ML14XC1-036-230	TXV	33600	15.1	12.5	CH35-36B	EL180UH090XE48B	9143269
ML14XC1-036-230	TXV	33000	15.1	12.2	CH35-36B	EL195UH045XE36B	9143270
ML14XC1-036-230	TXV	33000	15.1	12.2	CH35-36B	EL296UH045XE36B	9143271
ML14XC1-036-230	TXV	33200	15.1	12.2	CH35-36B	EL296UH045XV36B	9143272
ML14XC1-036-230	TXV	33200	15.1	12.5	CH35-36B	EL296UH070XV36B	9143273

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090V36B	9143274
ML14XC1-036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090V48B	9143275
ML14XC1-036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090XV48B	9143276
ML14XC1-036-230	TXV	33200	15.1	12.5	CH35-36B	SLP98UH070XV36B	9143277
ML14XC1-036-230	TXV	34400	16	13	CH35-36C	EL180UH090E60C	9143278
ML14XC1-036-230	TXV	34200	16	13	CH35-36C	EL180UH110E60C	9143279
ML14XC1-036-230	TXV	34200	16	13	CH35-36C	EL180UH110XE60C	9143280
ML14XC1-036-230	TXV	34200	15.5	12.5	CH35-36C	EL195UH090XE48C	9143281
ML14XC1-036-230	TXV	34400	15.5	12.5	CH35-36C	EL195UH110XE60C	9143282
ML14XC1-036-230	TXV	34200	15.5	12.5	CH35-36C	EL296UH090XE48C	9143283
ML14XC1-036-230	TXV	34200	15.5	12.5	CH35-36C	EL296UH090XV36C	9143284
ML14XC1-036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH090XV48C	9143285
ML14XC1-036-230	TXV	34400	15.5	12.5	CH35-36C	EL296UH110XE60C	9143286
ML14XC1-036-230	TXV	34200	16	13	CH35-36C	EL296UH110XV48C	9143287
ML14XC1-036-230	TXV	34400	16	13	CH35-36C	EL296UH110XV60C	9143288
ML14XC1-036-230	TXV	34600	16	13	CH35-36C	SL280UH090V60C	9143289
ML14XC1-036-230	TXV	34600	16	13	CH35-36C	SL280UH090XV60C	9143290
ML14XC1-036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH110V60C	9143291
ML14XC1-036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH110XV60C	9143292
ML14XC1-036-230	TXV	34200	15.5	12.5	CH35-36C	SLP98UH090XV36C	9143293
ML14XC1-036-230	TXV	34000	15.5	12.5	CH35-36C	SLP98UH090XV48C	9143294
ML14XC1-036-230	TXV	34400	16	13	CH35-36C	SLP98UH110XV60C	9143295
ML14XC1-036-230	TXV	36000	16	13	CH35-42B	EL180UH070E36B	9143296
ML14XC1-036-230	TXV	36000	16	13	CH35-42B	EL180UH070XE36B	9143297
ML14XC1-036-230	TXV	35800	16	13	CH35-42B	EL180UH090E48B	9143298
ML14XC1-036-230	TXV	35800	16	13	CH35-42B	EL180UH090XE48B	9143299
ML14XC1-036-230	TXV	35600	15.5	12.5	CH35-42B	EL195UH045XE36B	9143300
ML14XC1-036-230	TXV	35600	15.5	12.5	CH35-42B	EL195UH070XE36B	9143301
ML14XC1-036-230	TXV	35600	15.5	12.5	CH35-42B	EL296UH045XE36B	9143302
ML14XC1-036-230	TXV	35800	16	13	CH35-42B	EL296UH045XV36B	9143303
ML14XC1-036-230	TXV	35600	15.5	12.5	CH35-42B	EL296UH070XE36B	9143304
ML14XC1-036-230	TXV	35800	16	13	CH35-42B	EL296UH070XV36B	9143305
ML14XC1-036-230	TXV	36000	16	13	CH35-42B	SL280UH090V36B	9143306
ML14XC1-036-230	TXV	36000	16	13	CH35-42B	SL280UH090V48B	9143307
ML14XC1-036-230	TXV	36000	16	13	CH35-42B	SL280UH090XV48B	9143308
ML14XC1-036-230	TXV	35800	16	13	CH35-42B	SLP98UH070XV36B	9143309
ML14XC1-036-230	TXV	35400	15.1	12.5	CH35-42B		9143310
ML14XC1-036-230	TXV	35800	16	13	CH35-42C	EL180UH090E60C	9143311
ML14XC1-036-230	TXV	35400	16	13	CH35-42C	EL180UH110E60C	9143312
ML14XC1-036-230	TXV	35400	16	13	CH35-42C	EL180UH110XE60C	9143313
ML14XC1-036-230	TXV	35400	16	13	CH35-42C	EL195UH090XE48C	9143314
ML14XC1-036-230	TXV	35600	16	13	CH35-42C	EL195UH110XE60C	9143315
ML14XC1-036-230	TXV	35400	16	13	CH35-42C	EL296UH090XE48C	9143316
ML14XC1-036-230	TXV	35600	16	13	CH35-42C	EL296UH090XV36C	9143317
ML14XC1-036-230	TXV	35400	16	13	CH35-42C	EL296UH090XV48C	9143318
ML14XC1-036-230	TXV	35600	16	13	CH35-42C	EL296UH110XE60C	9143319
ML14XC1-036-230	TXV	35600	16	13	CH35-42C	EL296UH110XV48C	9143320
ML14XC1-036-230	TXV	35800	16	13	CH35-42C	EL296UH110XV60C	9143321
ML14XC1-036-230	TXV	36000	16	13	CH35-42C	SL280UH090V60C	9143322

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	36000	16	13	CH35-42C	SL280UH090XV60C	9143323
ML14XC1-036-230	TXV	35800	16	13	CH35-42C	SL280UH110V60C	9143324
ML14XC1-036-230	TXV	35800	16	13	CH35-42C	SL280UH110XV60C	9143325
ML14XC1-036-230	TXV	35600	16	13	CH35-42C	SLP98UH090XV36C	9143326
ML14XC1-036-230	TXV	35400	16	13	CH35-42C	SLP98UH090XV48C	9143327
ML14XC1-036-230	TXV	35800	16	13	CH35-42C	SLP98UH110XV60C	9143328
ML14XC1-036-230	TXV	35000	14.5	12.2	CH35-42C		9143329
ML14XC1-036-230	TXV	35200	15.5	12.5	CH35-48B	EL180UH070E36B	9143330
ML14XC1-036-230	TXV	35200	15.5	12.5	CH35-48B	EL180UH070XE36B	9143331
ML14XC1-036-230	TXV	35000	16	13	CH35-48B	EL180UH090E48B	9143332
ML14XC1-036-230	TXV	35000	16	13	CH35-48B	EL180UH090XE48B	9143333
ML14XC1-036-230	TXV	35000	15.1	12.5	CH35-48B	EL195UH045XE36B	9143334
ML14XC1-036-230	TXV	35000	15.1	12.5	CH35-48B	EL195UH070XE36B	9143335
ML14XC1-036-230	TXV	35000	15.1	12.5	CH35-48B	EL296UH045XE36B	9143336
ML14XC1-036-230	TXV	35000	15.5	12.5	CH35-48B	EL296UH045XV36B	9143337
ML14XC1-036-230	TXV	35000	15.1	12.5	CH35-48B	EL296UH070XE36B	9143338
ML14XC1-036-230	TXV	35200	15.5	12.5	CH35-48B	EL296UH070XV36B	9143339
ML14XC1-036-230	TXV	35200	16	13	CH35-48B	SL280UH090V36B	9143340
ML14XC1-036-230	TXV	35200	16	13	CH35-48B	SL280UH090V48B	9143341
ML14XC1-036-230	TXV	35200	16	13	CH35-48B	SL280UH090XV48B	9143342
ML14XC1-036-230	TXV	35200	15.5	12.5	CH35-48B	SLP98UH070XV36B	9143343
ML14XC1-036-230	TXV	34800	14.5	12.2	CH35-48B		9143344
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	EL180UH090E60C	9143345
ML14XC1-036-230	TXV	35200	16	13	CH35-48C	EL180UH110E60C	9143346
ML14XC1-036-230	TXV	35200	16	13	CH35-48C	EL180UH110XE60C	9143347
ML14XC1-036-230	TXV	35200	16	13	CH35-48C	EL195UH090XE48C	9143348
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	EL195UH110XE60C	9143349
ML14XC1-036-230	TXV	35200	16	13	CH35-48C	EL296UH090XE48C	9143350
ML14XC1-036-230	TXV	35400	16	13	CH35-48C	EL296UH090XV36C	9143351
ML14XC1-036-230	TXV	35200	16	13	CH35-48C	EL296UH090XV48C	9143352
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	EL296UH110XE60C	9143353
ML14XC1-036-230	TXV	35400	16	13	CH35-48C	EL296UH110XV48C	9143354
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	EL296UH110XV60C	9143355
ML14XC1-036-230	TXV	35800	16	13	CH35-48C	SL280UH090V60C	9143356
ML14XC1-036-230	TXV	35800	16	13	CH35-48C	SL280UH090XV60C	9143357
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	SL280UH110V60C	9143358
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	SL280UH110XV60C	9143359
ML14XC1-036-230	TXV	35400	16	13	CH35-48C	SLP98UH090XV36C	9143360
ML14XC1-036-230	TXV	35200	16	13	CH35-48C	SLP98UH090XV48C	9143361
ML14XC1-036-230	TXV	35600	16	13	CH35-48C	SLP98UH110XV60C	9143362
ML14XC1-036-230	TXV	34800	14.5	12.2	CH35-48C		9143363
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	EL180UH090E60C	9143364
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	EL180UH110E60C	9143365
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	EL180UH110XE60C	9143366
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	EL195UH090XE48C	9143367
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	EL195UH110XE60C	9143368
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	EL296UH090XE48C	9143369
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	EL296UH090XV36C	9143370
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	EL296UH090XV48C	9143371

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	EL296UH110XE60C	9143372
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	EL296UH110XV48C	9143373
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	EL296UH110XV60C	9143374
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	SL280UH090V60C	9143375
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	SL280UH090XV60C	9143376
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	SL280UH110V60C	9143377
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	SL280UH110XV60C	9143378
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	SLP98UH090XV36C	9143379
ML14XC1-036-230	TXV	35800	16	13	CH35-51C	SLP98UH090XV48C	9143380
ML14XC1-036-230	TXV	36000	16	13	CH35-51C	SLP98UH110XV60C	9143381
ML14XC1-036-230	TXV	35200	15.1	12.2	CH35-51C		9143382
ML14XC1-036-230	TXV	34000	15.1	12.2	CR33-30/36A	EL180DF045E36A	9143383
ML14XC1-036-230	TXV	33800	15.1	12.5	CR33-30/36A	SL280DF070V36A	9143384
ML14XC1-036-230	TXV	33800	15.5	12.5	CR33-30/36B	EL180DF070E36B	9143385
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36B	EL180DF090E48B	9143386
ML14XC1-036-230	TXV	33800	14.5	12.2	CR33-30/36B	EL195DF045XE36B	9143387
ML14XC1-036-230	TXV	33800	15.1	12.5	CR33-30/36B	EL195DF070XE48B	9143388
ML14XC1-036-230	TXV	33800	14.5	12.2	CR33-30/36B	EL296DF045XE36B	9143389
ML14XC1-036-230	TXV	33800	15.1	12.2	CR33-30/36B	EL296DF045XV36B	9143390
ML14XC1-036-230	TXV	33800	15.1	12.5	CR33-30/36B	EL296DF070XE48B	9143391
ML14XC1-036-230	TXV	33800	14.5	12.2	CR33-30/36B	EL296DF070XV48B	9143392
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36B	SL280DF090V48B	9143393
ML14XC1-036-230	TXV	34000	15.1	12.5	CR33-30/36B	SLP98DF070XV36B	9143394
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL180DF110E60C	9143395
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL195DF090XE48C	9143396
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL195DF110XE60C	9143397
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL296DF090XE48C	9143398
ML14XC1-036-230	TXV	34200	15.1	12.5	CR33-30/36C	EL296DF090XV60C	9143399
ML14XC1-036-230	TXV	34000	15.5	12.5	CR33-30/36C	EL296DF110XE60C	9143400
ML14XC1-036-230	TXV	34200	15.1	12.5	CR33-30/36C	EL296DF110XV60C	9143401
ML14XC1-036-230	TXV	34200	15.5	12.5	CR33-30/36C	SL280DF110V60C	9143402
ML14XC1-036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF090XV36C	9143403
ML14XC1-036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF090XV48C	9143404
ML14XC1-036-230	TXV	34200	15.1	12.5	CR33-30/36C	SLP98DF090XV60C	9143405
ML14XC1-036-230	TXV	34200	15.1	12.5	CR33-30/36C	SLP98DF110XV60C	9143406
ML14XC1-036-230	TXV	34200	16	13	CR33-48B	EL180DF070E36B	9143407
ML14XC1-036-230	TXV	34400	16	13	CR33-48B	EL180DF090E48B	9143408
ML14XC1-036-230	TXV	34000	15.1	12.5	CR33-48B	EL195DF045XE36B	9143409
ML14XC1-036-230	TXV	34200	15.5	12.5	CR33-48B	EL195DF070XE48B	9143410
ML14XC1-036-230	TXV	34000	15.1	12.5	CR33-48B	EL296DF045XE36B	9143411
ML14XC1-036-230	TXV	34200	15.1	12.5	CR33-48B	EL296DF045XV36B	9143412
ML14XC1-036-230	TXV	34200	15.5	12.5	CR33-48B	EL296DF070XE48B	9143413
ML14XC1-036-230	TXV	34400	15.1	12.5	CR33-48B	EL296DF070XV48B	9143414
ML14XC1-036-230	TXV	34400	15.5	12.5	CR33-48B	SL280DF090V48B	9143415
ML14XC1-036-230	TXV	34200	15.5	12.5	CR33-48B	SLP98DF070XV36B	9143416
ML14XC1-036-230	TXV	34800	16	13	CR33-48C	EL180DF110E60C	9143417
ML14XC1-036-230	TXV	34600	16	13	CR33-48C	EL195DF090XE48C	9143418
ML14XC1-036-230	TXV	34600	16	13	CR33-48C	EL195DF110XE60C	9143419
ML14XC1-036-230	TXV	34600	16	13	CR33-48C	EL296DF090XE48C	9143420

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF090XV60C	9143421
ML14XC1-036-230	TXV	34600	16	13	CR33-48C	EL296DF110XE60C	9143422
ML14XC1-036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF110XV60C	9143423
ML14XC1-036-230	TXV	34600	16	13	CR33-48C	SL280DF110V60C	9143424
ML14XC1-036-230	TXV	34400	15.5	12.5	CR33-48C	SLP98DF090XV36C	9143425
ML14XC1-036-230	TXV	34200	16	13	CR33-48C	SLP98DF090XV48C	9143426
ML14XC1-036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF090XV60C	9143427
ML14XC1-036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF110XV60C	9143428
ML14XC1-036-230	TXV	33600	15.1	12.2	CX35-30/36A	EL180UH045E36A	9143615
ML14XC1-036-230	TXV	33600	15.1	12.2	CX35-30/36A	EL180UH045XE36A	9143616
ML14XC1-036-230	TXV	33400	15.1	12.5	CX35-30/36A	SL280UH070V36A	9143617
ML14XC1-036-230	TXV	33400	15.1	12.5	CX35-30/36A	SL280UH070XV36A	9143618
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36B	EL180UH070E36B	9143619
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36B	EL180UH070XE36B	9143620
ML14XC1-036-230	TXV	34000	15.5	12.5	CX35-30/36B	EL180UH090E48B	9143621
ML14XC1-036-230	TXV	34000	15.5	12.5	CX35-30/36B	EL180UH090XE48B	9143622
ML14XC1-036-230	TXV	33200	15.1	12.5	CX35-30/36B	EL195UH045XE36B	9143623
ML14XC1-036-230	TXV	33200	15.1	12.5	CX35-30/36B	EL296UH045XE36B	9143624
ML14XC1-036-230	TXV	33200	15.1	12.2	CX35-30/36B	EL296UH045XV36B	9143625
ML14XC1-036-230	TXV	33400	15.1	12.5	CX35-30/36B	EL296UH070XV36B	9143626
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090V36B	9143627
ML14XC1-036-230	TXV	33800	15.5	12.5	CX35-30/36B	SL280UH090V48B	9143628
ML14XC1-036-230	TXV	33800	15.5	12.5	CX35-30/36B	SL280UH090XV48B	9143629
ML14XC1-036-230	TXV	33400	15.1	12.5	CX35-30/36B	SLP98UH070XV36B	9143630
ML14XC1-036-230	TXV	34000	15.5	12.5	CX35-30/36C	EL180UH090E60C	9143631
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL180UH110E60C	9143632
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL180UH110XE60C	9143633
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL195UH090XE48C	9143634
ML14XC1-036-230	TXV	34000	15.5	12.5	CX35-30/36C	EL195UH110XE60C	9143635
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH090XE48C	9143636
ML14XC1-036-230	TXV	33800	15.5	12.5	CX35-30/36C	EL296UH090XV36C	9143637
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH090XV48C	9143638
ML14XC1-036-230	TXV	34000	15.5	12.5	CX35-30/36C	EL296UH110XE60C	9143639
ML14XC1-036-230	TXV	33800	15.5	12.5	CX35-30/36C	EL296UH110XV48C	9143640
ML14XC1-036-230	TXV	33800	15.5	12.5	CX35-30/36C	SLP98UH090XV36C	9143641
ML14XC1-036-230	TXV	33600	15.5	12.5	CX35-30/36C	SLP98UH090XV48C	9143642
ML14XC1-036-230	TXV	34000	15.5	12.5	CX35-30/36C	SLP98UH110XV60C	9143643
ML14XC1-036-230	TXV	34800	15.5	12.5	CX35-30A	EL180UH045E36A	9143644
ML14XC1-036-230	TXV	34800	15.5	12.5	CX35-30A	EL180UH045XE36A	9143645
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-30A	SL280UH070V36A	9143646
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-30A	SL280UH070XV36A	9143647
ML14XC1-036-230	TXV	34400	16	13	CX35-30B	EL180UH070E36B	9143648
ML14XC1-036-230	TXV	34400	16	13	CX35-30B	EL180UH070XE36B	9143649
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-30B	EL180UH090E48B	9143650
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-30B	EL180UH090XE48B	9143651
ML14XC1-036-230	TXV	34400	14.5	12.2	CX35-30B	EL195UH045XE36B	9143652
ML14XC1-036-230	TXV	34400	15.5	12.5	CX35-30B	EL195UH070XE36B	9143653
ML14XC1-036-230	TXV	34400	14.5	12.2	CX35-30B	EL296UH045XE36B	9143654
ML14XC1-036-230	TXV	34600	15.1	12.5	CX35-30B	EL296UH045XV36B	9143655

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	34400	15.5	12.5	CX35-30B	EL296UH070XE36B	9143656
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-30B	EL296UH070XV36B	9143657
ML14XC1-036-230	TXV	34800	16	13	CX35-30B	SL280UH090V36B	9143658
ML14XC1-036-230	TXV	34800	16	13	CX35-30B	SL280UH090V48B	9143659
ML14XC1-036-230	TXV	34800	16	13	CX35-30B	SL280UH090XV48B	9143660
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-30B	SLP98UH070XV36B	9143661
ML14XC1-036-230	TXV	35200	15.5	12.5	CX35-36A	EL180UH045E36A	9143662
ML14XC1-036-230	TXV	35200	15.5	12.5	CX35-36A	EL180UH045XE36A	9143663
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36A	SL280UH070V36A	9143664
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36A	SL280UH070XV36A	9143665
ML14XC1-036-230	TXV	34600	14.5	12.2	CX35-36A		9143666
ML14XC1-036-230	TXV	35000	16	13	CX35-36B	EL180UH070E36B	9143667
ML14XC1-036-230	TXV	35000	16	13	CX35-36B	EL180UH070XE36B	9143668
ML14XC1-036-230	TXV	35400	16	13	CX35-36B	EL180UH090E48B	9143669
ML14XC1-036-230	TXV	35400	16	13	CX35-36B	EL180UH090XE48B	9143670
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-36B	EL195UH045XE36B	9143671
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36B	EL195UH070XE36B	9143672
ML14XC1-036-230	TXV	34600	15.5	12.5	CX35-36B	EL296UH045XE36B	9143673
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36B	EL296UH045XV36B	9143674
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36B	EL296UH070XE36B	9143675
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36B	EL296UH070XV36B	9143676
ML14XC1-036-230	TXV	35200	16	13	CX35-36B	SL280UH090V36B	9143677
ML14XC1-036-230	TXV	35200	16	13	CX35-36B	SL280UH090V48B	9143678
ML14XC1-036-230	TXV	35200	16	13	CX35-36B	SL280UH090XV48B	9143679
ML14XC1-036-230	TXV	35000	15.5	12.5	CX35-36B	SLP98UH070XV36B	9143680
ML14XC1-036-230	TXV	34600	14.5	12.2	CX35-36B		9143681
ML14XC1-036-230	TXV	35200	16	13	CX35-48B	EL180UH070E36B	9143682
ML14XC1-036-230	TXV	35200	16	13	CX35-48B	EL180UH070XE36B	9143683
ML14XC1-036-230	TXV	35600	16	13	CX35-48B	EL180UH090E48B	9143684
ML14XC1-036-230	TXV	35600	16	13	CX35-48B	EL180UH090XE48B	9143685
ML14XC1-036-230	TXV	34800	15.5	12.5	CX35-48B	EL195UH045XE36B	9143686
ML14XC1-036-230	TXV	35200	16	13	CX35-48B	EL195UH070XE36B	9143687
ML14XC1-036-230	TXV	34800	15.5	12.5	CX35-48B	EL296UH045XE36B	9143688
ML14XC1-036-230	TXV	35200	15.5	12.5	CX35-48B	EL296UH045XV36B	9143689
ML14XC1-036-230	TXV	35200	16	13	CX35-48B	EL296UH070XE36B	9143690
ML14XC1-036-230	TXV	35200	15.5	12.5	CX35-48B	EL296UH070XV36B	9143691
ML14XC1-036-230	TXV	35400	16	13	CX35-48B	SL280UH090V36B	9143692
ML14XC1-036-230	TXV	35400	16	13	CX35-48B	SL280UH090V48B	9143693
ML14XC1-036-230	TXV	35400	16	13	CX35-48B	SL280UH090XV48B	9143694
ML14XC1-036-230	TXV	35200	15.5	12.5	CX35-48B	SLP98UH070XV36B	9143695
ML14XC1-036-230	TXV	34800	14.5	12.2	CX35-48B		9143696
ML14XC1-036-230	TXV	35600	16	13	CX35-48C	EL180UH090E60C	9143697
ML14XC1-036-230	TXV	35200	16	13	CX35-48C	EL180UH110E60C	9143698
ML14XC1-036-230	TXV	35200	16	13	CX35-48C	EL180UH110XE60C	9143699
ML14XC1-036-230	TXV	35400	16	13	CX35-48C	EL195UH090XE48C	9143700
ML14XC1-036-230	TXV	35600	16	13	CX35-48C	EL195UH110XE60C	9143701
ML14XC1-036-230	TXV	35400	16	13	CX35-48C	EL296UH090XE48C	9143702
ML14XC1-036-230	TXV	35400	16	13	CX35-48C	EL296UH090XV36C	9143703
ML14XC1-036-230	TXV	35200	16	13	CX35-48C	EL296UH090XV48C	9143704

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	35600	16	13	CX35-48C	EL296UH110XE60C	9143705
ML14XC1-036-230	TXV	35400	16	13	CX35-48C	EL296UH110XV48C	9143706
ML14XC1-036-230	TXV	35800	16	13	CX35-48C	EL296UH110XV60C	9143707
ML14XC1-036-230	TXV	35800	16	13	CX35-48C	SL280UH090V60C	9143708
ML14XC1-036-230	TXV	35800	16	13	CX35-48C	SL280UH090XV60C	9143709
ML14XC1-036-230	TXV	35600	16	13	CX35-48C	SL280UH110V60C	9143710
ML14XC1-036-230	TXV	35600	16	13	CX35-48C	SL280UH110XV60C	9143711
ML14XC1-036-230	TXV	35400	16	13	CX35-48C	SLP98UH090XV36C	9143712
ML14XC1-036-230	TXV	35200	16	13	CX35-48C	SLP98UH090XV48C	9143713
ML14XC1-036-230	TXV	35800	16	13	CX35-48C	SLP98UH110XV60C	9143714
ML14XC1-036-230	TXV	34800	14.5	12.2	CX35-48C		9143715
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	EL180UH090E60C	9143734
ML14XC1-036-230	TXV	35600	16	13	CX35-49C	EL180UH110E60C	9143716
ML14XC1-036-230	TXV	35600	16	13	CX35-49C	EL180UH110XE60C	9143717
ML14XC1-036-230	TXV	35600	16	13	CX35-49C	EL195UH090XE48C	9143718
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	EL195UH110XE60C	9143719
ML14XC1-036-230	TXV	35600	16	13	CX35-49C	EL296UH090XE48C	9143720
ML14XC1-036-230	TXV	35800	16	13	CX35-49C	EL296UH090XV36C	9143721
ML14XC1-036-230	TXV	35600	16	13	CX35-49C	EL296UH090XV48C	9143722
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	EL296UH110XE60C	9143723
ML14XC1-036-230	TXV	35800	16	13	CX35-49C	EL296UH110XV48C	9143724
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	EL296UH110XV60C	9143725
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	SL280UH090V60C	9143726
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	SL280UH090XV60C	9143727
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	SL280UH110V60C	9143728
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	SL280UH110XV60C	9143729
ML14XC1-036-230	TXV	35800	16	13	CX35-49C	SLP98UH090XV36C	9143730
ML14XC1-036-230	TXV	35600	16	13	CX35-49C	SLP98UH090XV48C	9143731
ML14XC1-036-230	TXV	36000	16	13	CX35-49C	SLP98UH110XV60C	9143732
ML14XC1-036-230	TXV	35200	14.5	12.2	CX35-49C		9143733
ML14XC1-036-230	TXV	35400	16	13	CX35-50/60C	EL180UH090E60C	9143735
ML14XC1-036-230	TXV	35000	16	13	CX35-50/60C	EL180UH110E60C	9143736
ML14XC1-036-230	TXV	35000	16	13	CX35-50/60C	EL180UH110XE60C	9143737
ML14XC1-036-230	TXV	35200	16	13	CX35-50/60C	EL195UH090XE48C	9143738
ML14XC1-036-230	TXV	35400	16	13	CX35-50/60C	EL195UH110XE60C	9143739
ML14XC1-036-230	TXV	35200	16	13	CX35-50/60C	EL296UH090XE48C	9143740
ML14XC1-036-230	TXV	35200	16	13	CX35-50/60C	EL296UH090XV36C	9143741
ML14XC1-036-230	TXV	35000	16	13	CX35-50/60C	EL296UH090XV48C	9143742
ML14XC1-036-230	TXV	35400	16	13	CX35-50/60C	EL296UH110XE60C	9143743
ML14XC1-036-230	TXV	35200	16	13	CX35-50/60C	EL296UH110XV48C	9143744
ML14XC1-036-230	TXV	35600	16	13	CX35-50/60C	EL296UH110XV60C	9143745
ML14XC1-036-230	TXV	35600	16	13	CX35-50/60C	SL280UH090V60C	9143746
ML14XC1-036-230	TXV	35600	16	13	CX35-50/60C	SL280UH090XV60C	9143747
ML14XC1-036-230	TXV	35400	16	13	CX35-50/60C	SL280UH110V60C	9143748
ML14XC1-036-230	TXV	35400	16	13	CX35-50/60C	SL280UH110XV60C	9143749
ML14XC1-036-230	TXV	35200	16	13	CX35-50/60C	SLP98UH090XV36C	9143750
ML14XC1-036-230	TXV	35000	16	13	CX35-50/60C	SLP98UH090XV48C	9143751
ML14XC1-036-230	TXV	35600	16	13	CX35-50/60C	SLP98UH110XV60C	9143752
ML14XC1-036-230	TXV	34600	14.5	12.2	CX35-50/60C		9143753

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-036-230	TXV	34600	14.5	12.2	CX38-38B		10551724
ML14XC1-042-230	RFC	41000	14.25	12.2	CH33-43C		9144138
ML14XC1-042-230	RFC	41500	14.5	12.5	CH33-49		9144187
ML14XC1-042-230	RFC	41500	14.5	12.5	CH33-50/60C		9144209
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36B	EL180UH090E48B	9143938
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36B	EL180UH090XE48B	9143939
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36B	SL280UH090V36B	9143940
ML14XC1-042-230	TXV	39500	14.5	12.5	C35-30/36B	SL280UH090V48B	9143941
ML14XC1-042-230	TXV	39500	14.5	12.5	C35-30/36B	SL280UH090XV48B	9143942
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL180UH090E60C	9143943
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL180UH110E60C	9143944
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL180UH110XE60C	9143945
ML14XC1-042-230	TXV	39000	15.1	12.5	C35-30/36C	EL195UH090XE48C	9143946
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL195UH110XE60C	9143947
ML14XC1-042-230	TXV	39000	15.1	12.5	C35-30/36C	EL296UH090XE48C	9143948
ML14XC1-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XV36C	9143949
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL296UH090XV48C	9143950
ML14XC1-042-230	TXV	39500	14.5	12.5	C35-30/36C	EL296UH090XV60C	9143951
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL296UH110XE60C	9143952
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	EL296UH110XV60C	9143953
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH090V60C	9143954
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH090XV60C	9143955
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH110V60C	9143956
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	SL280UH110XV60C	9143957
ML14XC1-042-230	TXV	39000	14.5	12.2	C35-30/36C	SLP98UH090XV36C	9143958
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	SLP98UH090XV48C	9143959
ML14XC1-042-230	TXV	39500	14.5	12.5	C35-30/36C	SLP98UH090XV60C	9143960
ML14XC1-042-230	TXV	39500	15.1	12.5	C35-30/36C	SLP98UH110XV60C	9143961
ML14XC1-042-230	TXV	41000	15.5	13	C35-36B	EL180UH090E48B	9143962
ML14XC1-042-230	TXV	41000	15.5	13	C35-36B	EL180UH090XE48B	9143963
ML14XC1-042-230	TXV	41000	15.1	12.5	C35-36B	EL296UH045XV36B	9143964
ML14XC1-042-230	TXV	41000	15.1	12.5	C35-36B	EL296UH070XV36B	9143965
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-36B	SL280UH090V36B	9143966
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-36B	SL280UH090V48B	9143967
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-36B	SL280UH090XV48B	9143968
ML14XC1-042-230	TXV	41000	15.1	12.5	C35-36B	SLP98UH070XV36B	9143969
ML14XC1-042-230	TXV	41500	16	13	C35-48B	EL180UH090E48B	9143970
ML14XC1-042-230	TXV	41500	16	13	C35-48B	EL180UH090XE48B	9143971
ML14XC1-042-230	TXV	41000	15.1	12.5	C35-48B	EL296UH045XV36B	9143972
ML14XC1-042-230	TXV	41000	15.1	12.5	C35-48B	EL296UH070XV36B	9143973
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-48B	SL280UH090V36B	9143974
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-48B	SL280UH090V48B	9143975
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-48B	SL280UH090XV48B	9143976
ML14XC1-042-230	TXV	41000	15.1	12.5	C35-48B	SLP98UH070XV36B	9143977
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL180UH090E60C	9143978
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL180UH110E60C	9143979
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL180UH110XE60C	9143980
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL195UH090XE48C	9143981
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL195UH110XE60C	9143982

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL296UH090XE48C	9143983
ML14XC1-042-230	TXV	41500	15.5	13	C35-48C	EL296UH090XV36C	9143984
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL296UH090XV48C	9143985
ML14XC1-042-230	TXV	41500	15.5	13	C35-48C	EL296UH090XV60C	9143986
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL296UH110XE60C	9143987
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL296UH110XV48C	9143988
ML14XC1-042-230	TXV	41500	16	13	C35-48C	EL296UH110XV60C	9143989
ML14XC1-042-230	TXV	42000	16	13	C35-48C	SL280UH090V60C	9143990
ML14XC1-042-230	TXV	42000	16	13	C35-48C	SL280UH090XV60C	9143991
ML14XC1-042-230	TXV	41500	16	13	C35-48C	SL280UH110V60C	9143992
ML14XC1-042-230	TXV	41500	16	13	C35-48C	SL280UH110XV60C	9143993
ML14XC1-042-230	TXV	41500	15.5	13	C35-48C	SLP98UH090XV36C	9143994
ML14XC1-042-230	TXV	41500	16	13	C35-48C	SLP98UH090XV48C	9143995
ML14XC1-042-230	TXV	41500	15.5	13	C35-48C	SLP98UH090XV60C	9143996
ML14XC1-042-230	TXV	41500	16	13	C35-48C	SLP98UH110XV60C	9143997
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL180UH090E60C	9143998
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL180UH110E60C	9143999
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL180UH110XE60C	9144000
ML14XC1-042-230	TXV	41500	16	13	C35-49C	EL195UH090XE48C	9144001
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL195UH110XE60C	9144002
ML14XC1-042-230	TXV	41500	16	13	C35-49C	EL296UH090XE48C	9144003
ML14XC1-042-230	TXV	41500	16	13	C35-49C	EL296UH090XV36C	9144004
ML14XC1-042-230	TXV	41500	16	13	C35-49C	EL296UH090XV48C	9144005
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL296UH090XV60C	9144006
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL296UH110XE60C	9144007
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL296UH110XV48C	9144008
ML14XC1-042-230	TXV	42000	16	13	C35-49C	EL296UH110XV60C	9144017
ML14XC1-042-230	TXV	42000	16	13	C35-49C	SL280UH090V60C	9144010
ML14XC1-042-230	TXV	42000	16	13	C35-49C	SL280UH090XV60C	9144011
ML14XC1-042-230	TXV	42000	16	13	C35-49C	SL280UH110V60C	9144012
ML14XC1-042-230	TXV	42000	16	13	C35-49C	SL280UH110XV60C	9144013
ML14XC1-042-230	TXV	41500	16	13	C35-49C	SLP98UH090XV36C	9144014
ML14XC1-042-230	TXV	41500	16	13	C35-49C	SLP98UH090XV48C	9144015
ML14XC1-042-230	TXV	42000	16	13	C35-49C	SLP98UH090XV60C	9144016
ML14XC1-042-230	TXV	42000	16	13	C35-49C	SLP98UH110XV60C	9144009
ML14XC1-042-230	TXV	41500	14.5	12.5	C35-49C		9144018
ML14XC1-042-230	TXV	41000	16	13	C35-50/60C	EL180UH090E60C	9144019
ML14XC1-042-230	TXV	41000	16	13	C35-50/60C	EL180UH110E60C	9144020
ML14XC1-042-230	TXV	41000	16	13	C35-50/60C	EL180UH110XE60C	9144021
ML14XC1-042-230	TXV	41000	15.5	13	C35-50/60C	EL195UH090XE48C	9144022
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-50/60C	EL195UH110XE60C	9144023
ML14XC1-042-230	TXV	41000	15.5	13	C35-50/60C	EL296UH090XE48C	9144024
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH090XV36C	9144025
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH090XV48C	9144026
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-50/60C	EL296UH090XV60C	9144027
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-50/60C	EL296UH110XE60C	9144028
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH110XV48C	9144029
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL296UH110XV60C	9144030
ML14XC1-042-230	TXV	41500	15.5	13	C35-50/60C	SL280UH090V60C	9144031

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	41500	15.5	13	C35-50/60C	SL280UH090XV60C	9144032
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	SL280UH110V60C	9144033
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	SL280UH110XV60C	9144034
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	SLP98UH090XV36C	9144035
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	SLP98UH090XV48C	9144036
ML14XC1-042-230	TXV	41500	15.5	12.5	C35-50/60C	SLP98UH090XV60C	9144037
ML14XC1-042-230	TXV	41000	15.5	12.5	C35-50/60C	SLP98UH110XV60C	9144038
ML14XC1-042-230	TXV	40500	14.5	12.2	C35-50/60C		9144039
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL180UH090E60C	9144040
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL180UH110E60C	9144041
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL180UH110XE60C	9144042
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL195UH090XE48C	9144043
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL195UH110XE60C	9144044
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH090XE48C	9144045
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH090XV36C	9144046
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH090XV48C	9144047
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH090XV60C	9144048
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH110XE60C	9144049
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH110XV48C	9144050
ML14XC1-042-230	TXV	42000	16	13	C35-60C	EL296UH110XV60C	9144051
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SL280UH090V60C	9144052
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SL280UH090XV60C	9144053
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SL280UH110V60C	9144054
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SL280UH110XV60C	9144055
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV36C	9144056
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV48C	9144057
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV60C	9144058
ML14XC1-042-230	TXV	42000	16	13	C35-60C	SLP98UH110XV60C	9144059
ML14XC1-042-230	TXV	42000	15.1	12.5	C35-60C		9144060
ML14XC1-042-230	TXV	42000	16	13	C35-60D	EL180UH135E60D	9144061
ML14XC1-042-230	TXV	42000	16	13	C35-60D	EL195UH135XE60D	9144062
ML14XC1-042-230	TXV	42000	16	13	C35-60D	EL296UH135XE60D	9144063
ML14XC1-042-230	TXV	42000	16	13	C35-60D	SL280UH135V60D	9144064
ML14XC1-042-230	TXV	41500	14.5	12.5	C35-60D		9144065
ML14XC1-042-230	TXV	42000	16	13	CBA27UHE-042		10259426
ML14XC1-042-230	TXV	42000	16	13	CBA27UHE-048		10259427
ML14XC1-042-230	TXV	41000	15.1	12.5	CBX25UH-042		9144066
ML14XC1-042-230	TXV	41500	15.5	12.5	CBX25UH-048		9144067
ML14XC1-042-230	TXV	41500	16	13	CBX25UHV-042		9144068
ML14XC1-042-230	TXV	42000	16	13	CBX25UHV-048		9144069
ML14XC1-042-230	TXV	42000	16	13	CBX27UH-042		9144070
ML14XC1-042-230	TXV	41500	16	13	CBX27UH-048		9144071
ML14XC1-042-230	TXV	40000	14.5	12.5	CBX32M-042		9144072
ML14XC1-042-230	TXV	41500	15.1	12.5	CBX32M-048		9144073
ML14XC1-042-230	TXV	42000	16	13	CBX32MV-048		9144074
ML14XC1-042-230	TXV	41500	16	13	CBX40UHV-042		9144075
ML14XC1-042-230	TXV	42000	16	13	CBX40UHV-048		9144076
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-51	EL180UH090E60C	9144077
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	EL180UH110E60C	9144078

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	EL180UH110XE60C	9144079
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH090XV48C	9144080
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH090XV60C	9144081
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH110XV48C	9144082
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	EL296UH110XV60C	9144083
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-51	SL280UH090V60C	9144084
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	SL280UH110V60C	9144085
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	SL280UH110XV60C	9144086
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	SLP98UH090XV48C	9144087
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	SLP98UH090XV60C	9144088
ML14XC1-042-230	TXV	40000	15.5	12.5	CH23-51	SLP98UH110XV60C	9144089
ML14XC1-042-230	TXV	40500	16	13	CH23-65	EL180UH090E60C	9144090
ML14XC1-042-230	TXV	40500	15.5	13	CH23-65	EL180UH110E60C	9144091
ML14XC1-042-230	TXV	40500	15.5	13	CH23-65	EL180UH110XE60C	9144092
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH090XV48C	9144093
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH090XV60C	9144094
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH110XV48C	9144095
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	EL296UH110XV60C	9144096
ML14XC1-042-230	TXV	41000	16	13	CH23-65	SL280UH090V60C	9144097
ML14XC1-042-230	TXV	40500	15.5	13	CH23-65	SL280UH110V60C	9144098
ML14XC1-042-230	TXV	40500	15.5	13	CH23-65	SL280UH110XV60C	9144099
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	SLP98UH090XV48C	9144100
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	SLP98UH090XV60C	9144101
ML14XC1-042-230	TXV	40500	15.5	12.5	CH23-65	SLP98UH110XV60C	9144102
ML14XC1-042-230	TXV	40500	15.5	12.5	CH33-42	EL180UH090E48B	9144103
ML14XC1-042-230	TXV	40500	15.5	12.5	CH33-42	EL180UH090XE48B	9144104
ML14XC1-042-230	TXV	40000	14.5	12.2	CH33-42	EL296UH070XV36B	9144105
ML14XC1-042-230	TXV	40500	15.5	12.5	CH33-42	SL280UH090V36B	9144106
ML14XC1-042-230	TXV	40500	15.1	12.5	CH33-42	SL280UH090V48B	9144107
ML14XC1-042-230	TXV	40500	15.1	12.5	CH33-42	SL280UH090XV48B	9144108
ML14XC1-042-230	TXV	40000	14.5	12.2	CH33-42	SLP98UH070XV36B	9144109
ML14XC1-042-230	TXV	42000	16	13	CH33-43B	EL180UH090E48B	9144110
ML14XC1-042-230	TXV	42000	16	13	CH33-43B	EL180UH090XE48B	9144111
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-43B	EL296UH045XV36B	9144112
ML14XC1-042-230	TXV	41500	15.1	12.5	CH33-43B	EL296UH070XV36B	9144113
ML14XC1-042-230	TXV	42000	16	13	CH33-43B	SL280UH090V36B	9144114
ML14XC1-042-230	TXV	42000	16	13	CH33-43B	SL280UH090V48B	9144115
ML14XC1-042-230	TXV	42000	16	13	CH33-43B	SL280UH090XV48B	9144116
ML14XC1-042-230	TXV	41500	15.1	12.5	CH33-43B	SLP98UH070XV36B	9144117
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL180UH090E60C	9144118
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL180UH110E60C	9144119
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL180UH110XE60C	9144120
ML14XC1-042-230	TXV	41000	16	13	CH33-43C	EL195UH090XE48C	9144121
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL195UH110XE60C	9144122
ML14XC1-042-230	TXV	41000	16	13	CH33-43C	EL296UH090XE48C	9144123
ML14XC1-042-230	TXV	41500	15.5	13	CH33-43C	EL296UH090XV36C	9144124
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL296UH090XV48C	9144125
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL296UH090XV60C	9144126
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL296UH110XE60C	9144127

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL296UH110XV48C	9144128
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	EL296UH110XV60C	9144129
ML14XC1-042-230	TXV	42000	16	13	CH33-43C	SL280UH090V60C	9144130
ML14XC1-042-230	TXV	42000	16	13	CH33-43C	SL280UH090XV60C	9144131
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	SL280UH110V60C	9144132
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	SL280UH110XV60C	9144133
ML14XC1-042-230	TXV	41500	15.5	13	CH33-43C	SLP98UH090XV36C	9144134
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	SLP98UH090XV48C	9144135
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	SLP98UH090XV60C	9144136
ML14XC1-042-230	TXV	41500	16	13	CH33-43C	SLP98UH110XV60C	9144137
ML14XC1-042-230	TXV	41000	14.5	12.2	CH33-43C		9144139
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-44/48B	EL180UH090E48B	9144140
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-44/48B	EL180UH090XE48B	9144141
ML14XC1-042-230	TXV	40500	14.5	12.5	CH33-44/48B	EL296UH070XV36B	9144142
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-44/48B	SL280UH090V36B	9144143
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-44/48B	SL280UH090V48B	9144144
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-44/48B	SL280UH090XV48B	9144145
ML14XC1-042-230	TXV	40500	14.5	12.5	CH33-44/48B	SLP98UH070XV36B	9150356
ML14XC1-042-230	TXV	41000	16	13	CH33-48C	EL180UH090E60C	9144147
ML14XC1-042-230	TXV	41000	16	13	CH33-48C	EL180UH110E60C	9144148
ML14XC1-042-230	TXV	41000	16	13	CH33-48C	EL180UH110XE60C	9144149
ML14XC1-042-230	TXV	41000	15.5	13	CH33-48C	EL195UH090XE48C	9144150
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-48C	EL195UH110XE60C	9144151
ML14XC1-042-230	TXV	41000	15.5	13	CH33-48C	EL296UH090XE48C	9144152
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH090XV36C	9144153
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH090XV48C	9144154
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-48C	EL296UH090XV60C	9144155
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-48C	EL296UH110XE60C	9144156
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH110XV48C	9144157
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	EL296UH110XV60C	9144158
ML14XC1-042-230	TXV	41500	15.5	13	CH33-48C	SL280UH090V60C	9144159
ML14XC1-042-230	TXV	41500	15.5	13	CH33-48C	SL280UH090XV60C	9144160
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	SL280UH110V60C	9144161
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	SL280UH110XV60C	9144162
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	SLP98UH090XV36C	9144163
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	SLP98UH090XV48C	9144164
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-48C	SLP98UH090XV60C	9144165
ML14XC1-042-230	TXV	41000	15.5	12.5	CH33-48C	SLP98UH110XV60C	9144166
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL180UH090E60C	9144167
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL180UH110E60C	9144168
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL180UH110XE60C	9144169
ML14XC1-042-230	TXV	41500	16	13	CH33-49	EL195UH090XE48C	9144170
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL195UH110XE60C	9144171
ML14XC1-042-230	TXV	41500	16	13	CH33-49	EL296UH090XE48C	9144172
ML14XC1-042-230	TXV	41500	15.5	13	CH33-49	EL296UH090XV36C	9144173
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL296UH090XV48C	9144174
ML14XC1-042-230	TXV	42000	15.5	13	CH33-49	EL296UH090XV60C	9144175
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL296UH110XE60C	9144176
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL296UH110XV48C	9144177

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	42000	16	13	CH33-49	EL296UH110XV60C	9144178
ML14XC1-042-230	TXV	42000	16	13	CH33-49	SL280UH090V60C	9144179
ML14XC1-042-230	TXV	42000	16	13	CH33-49	SL280UH090XV60C	9144180
ML14XC1-042-230	TXV	42000	16	13	CH33-49	SL280UH110V60C	9144181
ML14XC1-042-230	TXV	42000	16	13	CH33-49	SL280UH110XV60C	9144182
ML14XC1-042-230	TXV	41500	15.5	13	CH33-49	SLP98UH090XV36C	9144183
ML14XC1-042-230	TXV	42000	16	13	CH33-49	SLP98UH090XV48C	9144184
ML14XC1-042-230	TXV	42000	15.5	13	CH33-49	SLP98UH090XV60C	9144185
ML14XC1-042-230	TXV	42000	16	13	CH33-49	SLP98UH110XV60C	9144186
ML14XC1-042-230	TXV	41500	14.5	12.5	CH33-49		9144188
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL180UH090E60C	9144189
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL180UH110E60C	9144190
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL180UH110XE60C	9144191
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL195UH090XE48C	9144192
ML14XC1-042-230	TXV	42000	16	13	CH33-50/60C	EL195UH110XE60C	9144193
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL296UH090XE48C	9144194
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH090XV36C	9144195
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL296UH090XV48C	9144196
ML14XC1-042-230	TXV	42000	15.5	12.5	CH33-50/60C	EL296UH090XV60C	9144197
ML14XC1-042-230	TXV	42000	16	13	CH33-50/60C	EL296UH110XE60C	9144198
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL296UH110XV48C	9144199
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	EL296UH110XV60C	9144200
ML14XC1-042-230	TXV	42000	16	13	CH33-50/60C	SL280UH090V60C	9144201
ML14XC1-042-230	TXV	42000	16	13	CH33-50/60C	SL280UH090XV60C	9144202
ML14XC1-042-230	TXV	41500	15.5	13	CH33-50/60C	SL280UH110V60C	9144203
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	SL280UH110XV60C	9144204
ML14XC1-042-230	TXV	41500	15.5	12.5	CH33-50/60C	SLP98UH090XV36C	9144205
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	SLP98UH090XV48C	9144206
ML14XC1-042-230	TXV	42000	15.5	12.5	CH33-50/60C	SLP98UH090XV60C	9144207
ML14XC1-042-230	TXV	41500	16	13	CH33-50/60C	SLP98UH110XV60C	9144208
ML14XC1-042-230	TXV	41000	14.5	12.2	CH33-50/60C		9144210
ML14XC1-042-230	TXV	42000	16	13	CH35-42B	EL180UH090E48B	9144211
ML14XC1-042-230	TXV	42000	16	13	CH35-42B	EL180UH090XE48B	9144212
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-42B	EL296UH045XV36B	9144213
ML14XC1-042-230	TXV	41500	15.1	12.5	CH35-42B	EL296UH070XV36B	9144214
ML14XC1-042-230	TXV	42000	16	13	CH35-42B	SL280UH090V36B	9144215
ML14XC1-042-230	TXV	42000	16	13	CH35-42B	SL280UH090V48B	9144216
ML14XC1-042-230	TXV	42000	16	13	CH35-42B	SL280UH090XV48B	9144217
ML14XC1-042-230	TXV	41500	15.1	12.5	CH35-42B	SLP98UH070XV36B	9144218
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL180UH090E60C	9144219
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL180UH110E60C	9144220
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL180UH110XE60C	9144221
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL195UH090XE48C	9144222
ML14XC1-042-230	TXV	42000	16	13	CH35-42C	EL195UH110XE60C	9144223
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL296UH090XE48C	9144224
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL296UH090XV36C	9144225
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL296UH090XV48C	9144226
ML14XC1-042-230	TXV	42000	16	13	CH35-42C	EL296UH090XV60C	9144227
ML14XC1-042-230	TXV	42000	16	13	CH35-42C	EL296UH110XE60C	9144228

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL296UH110XV48C	9144229
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	EL296UH110XV60C	9144230
ML14XC1-042-230	TXV	42000	16	13	CH35-42C	SL280UH090V60C	9144231
ML14XC1-042-230	TXV	42000	16	13	CH35-42C	SL280UH090XV60C	9144232
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	SL280UH110V60C	9144233
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	SL280UH110XV60C	9144234
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	SLP98UH090XV36C	9144235
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	SLP98UH090XV48C	9144236
ML14XC1-042-230	TXV	42000	16	13	CH35-42C	SLP98UH090XV60C	9144237
ML14XC1-042-230	TXV	41500	16	13	CH35-42C	SLP98UH110XV60C	9144238
ML14XC1-042-230	TXV	41000	14.5	12.2	CH35-42C		9144239
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48B	EL180UH090E48B	9144240
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48B	EL180UH090XE48B	9144241
ML14XC1-042-230	TXV	41000	15.1	12.5	CH35-48B	EL296UH045XV36B	9144242
ML14XC1-042-230	TXV	41000	15.1	12.5	CH35-48B	EL296UH070XV36B	9144243
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48B	SL280UH090V36B	9144244
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48B	SL280UH090V48B	9144245
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48B	SL280UH090XV48B	9144246
ML14XC1-042-230	TXV	41000	15.1	12.5	CH35-48B	SLP98UH070XV36B	9144247
ML14XC1-042-230	TXV	41500	16	13	CH35-48C	EL180UH090E60C	9144248
ML14XC1-042-230	TXV	41500	16	13	CH35-48C	EL180UH110E60C	9144249
ML14XC1-042-230	TXV	41500	16	13	CH35-48C	EL180UH110XE60C	9144250
ML14XC1-042-230	TXV	41000	15.5	13	CH35-48C	EL195UH090XE48C	9144251
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	EL195UH110XE60C	9144252
ML14XC1-042-230	TXV	41000	15.5	13	CH35-48C	EL296UH090XE48C	9144253
ML14XC1-042-230	TXV	41000	15.5	12.5	CH35-48C	EL296UH090XV36C	9144254
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	EL296UH090XV48C	9144255
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48C	EL296UH090XV60C	9144256
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	EL296UH110XE60C	9144257
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	EL296UH110XV48C	9144258
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	EL296UH110XV60C	9144259
ML14XC1-042-230	TXV	41500	16	13	CH35-48C	SL280UH090V60C	9144260
ML14XC1-042-230	TXV	41500	16	13	CH35-48C	SL280UH090XV60C	9144261
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH110V60C	9144262
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH110XV60C	9144263
ML14XC1-042-230	TXV	41000	15.5	12.5	CH35-48C	SLP98UH090XV36C	9144264
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	SLP98UH090XV48C	9144265
ML14XC1-042-230	TXV	41500	15.5	12.5	CH35-48C	SLP98UH090XV60C	9144266
ML14XC1-042-230	TXV	41500	15.5	13	CH35-48C	SLP98UH110XV60C	9144267
ML14XC1-042-230	TXV	41000	14.5	12.2	CH35-48C		9144268
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL180UH090E60C	9144269
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL180UH110E60C	9144270
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL180UH110XE60C	9144271
ML14XC1-042-230	TXV	41500	16	13	CH35-51C	EL195UH090XE48C	9144272
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL195UH110XE60C	9144273
ML14XC1-042-230	TXV	41500	16	13	CH35-51C	EL296UH090XE48C	9144274
ML14XC1-042-230	TXV	41500	15.5	13	CH35-51C	EL296UH090XV36C	9144275
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL296UH090XV48C	9144276
ML14XC1-042-230	TXV	42000	15.5	13	CH35-51C	EL296UH090XV60C	9144277

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL296UH110XE60C	9144278
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL296UH110XV48C	9144279
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	EL296UH110XV60C	9144280
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	SL280UH090V60C	9144281
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	SL280UH090XV60C	9144282
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	SL280UH110V60C	9144283
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	SL280UH110XV60C	9144284
ML14XC1-042-230	TXV	41500	15.5	13	CH35-51C	SLP98UH090XV36C	9144285
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	SLP98UH090XV48C	9144286
ML14XC1-042-230	TXV	42000	15.5	13	CH35-51C	SLP98UH090XV60C	9144287
ML14XC1-042-230	TXV	42000	16	13	CH35-51C	SLP98UH110XV60C	9144288
ML14XC1-042-230	TXV	41500	14.5	12.5	CH35-51C		9144289
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	EL180DF110E60C	9144291
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	EL195DF090XE48C	9144292
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	EL195DF110XE60C	9144293
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	EL296DF090XE48C	9144294
ML14XC1-042-230	TXV	40500	15.1	12.5	CR33-48	EL296DF090XV60C	9144295
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	EL296DF110XE60C	9144296
ML14XC1-042-230	TXV	40500	15.1	12.5	CR33-48	SL280DF090V48B	9144290
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	SL280DF090V60C	9144297
ML14XC1-042-230	TXV	40500	15.5	12.5	CR33-48	SL280DF110V60C	9144298
ML14XC1-042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV36C	9144299
ML14XC1-042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV48C	9144300
ML14XC1-042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV60C	9144301
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	EL180DF110E60C	9144302
ML14XC1-042-230	TXV	41000	15.5	13	CR33-50/60	EL195DF090XE48C	9144303
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	EL195DF110XE60C	9144304
ML14XC1-042-230	TXV	41000	15.5	13	CR33-50/60	EL296DF090XE48C	9144305
ML14XC1-042-230	TXV	41500	15.5	12.5	CR33-50/60	EL296DF090XV60C	9144306
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	EL296DF110XE60C	9144307
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	EL296DF110XV60C	9144308
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	SL280DF090V60C	9144309
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	SL280DF110V60C	9144310
ML14XC1-042-230	TXV	41000	15.5	12.5	CR33-50/60	SLP98DF090XV36C	9144311
ML14XC1-042-230	TXV	41500	15.5	12.5	CR33-50/60	SLP98DF090XV48C	9144312
ML14XC1-042-230	TXV	41500	15.5	12.5	CR33-50/60	SLP98DF090XV60C	9144313
ML14XC1-042-230	TXV	41500	16	13	CR33-50/60	SLP98DF110XV60C	9144314
ML14XC1-042-230	TXV	40500	14.5	12.2	CR33-50/60		10238964
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36B	EL180UH090E48B	9144483
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36B	EL180UH090XE48B	9144484
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36B	SL280UH090V36B	9144485
ML14XC1-042-230	TXV	39500	14.5	12.5	CX35-30/36B	SL280UH090V48B	9144486
ML14XC1-042-230	TXV	39500	14.5	12.5	CX35-30/36B	SL280UH090XV48B	9144487
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL180UH090E60C	9144488
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL180UH110E60C	9144489
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL180UH110XE60C	9144490
ML14XC1-042-230	TXV	39000	15.1	12.5	CX35-30/36C	EL195UH090XE48C	9144491
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL195UH110XE60C	9144492
ML14XC1-042-230	TXV	39000	15.1	12.5	CX35-30/36C	EL296UH090XE48C	9144493

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XV36C	9144494
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL296UH090XV48C	9144495
ML14XC1-042-230	TXV	39500	14.5	12.5	CX35-30/36C	EL296UH090XV60C	9144496
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL296UH110XE60C	9144497
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	EL296UH110XV60C	9144498
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH090V60C	9144499
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH090XV60C	9144500
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH110V60C	9144501
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	SL280UH110XV60C	9144502
ML14XC1-042-230	TXV	39000	14.5	12.2	CX35-30/36C	SLP98UH090XV36C	9144503
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	SLP98UH090XV48C	9144504
ML14XC1-042-230	TXV	39500	14.5	12.5	CX35-30/36C	SLP98UH090XV60C	9144505
ML14XC1-042-230	TXV	39500	15.1	12.5	CX35-30/36C	SLP98UH110XV60C	9144506
ML14XC1-042-230	TXV	41000	15.5	13	CX35-36B	EL180UH090E48B	9144507
ML14XC1-042-230	TXV	41000	15.5	13	CX35-36B	EL180UH090XE48B	9144508
ML14XC1-042-230	TXV	41000	15.1	12.5	CX35-36B	EL296UH045XV36B	9144509
ML14XC1-042-230	TXV	41000	15.1	12.5	CX35-36B	EL296UH070XV36B	9144510
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-36B	SL280UH090V36B	9144511
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-36B	SL280UH090V48B	9144512
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-36B	SL280UH090XV48B	9144513
ML14XC1-042-230	TXV	41000	15.1	12.5	CX35-36B	SLP98UH070XV36B	9144514
ML14XC1-042-230	TXV	41000	14.5	12.2	CX35-36B		9144515
ML14XC1-042-230	TXV	41500	16	13	CX35-48B	EL180UH090E48B	9144516
ML14XC1-042-230	TXV	41500	16	13	CX35-48B	EL180UH090XE48B	9144517
ML14XC1-042-230	TXV	41000	15.1	12.5	CX35-48B	EL296UH045XV36B	9144518
ML14XC1-042-230	TXV	41000	15.1	12.5	CX35-48B	EL296UH070XV36B	9144519
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-48B	SL280UH090V36B	9144520
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-48B	SL280UH090V48B	9144521
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-48B	SL280UH090XV48B	9144522
ML14XC1-042-230	TXV	41000	15.1	12.5	CX35-48B	SLP98UH070XV36B	9144523
ML14XC1-042-230	TXV	41000	14.5	12.2	CX35-48B		9144524
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL180UH090E60C	9144525
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL180UH110E60C	9144526
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL180UH110XE60C	9144527
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL195UH090XE48C	9144528
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL195UH110XE60C	9144529
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL296UH090XE48C	9144530
ML14XC1-042-230	TXV	41500	15.5	13	CX35-48C	EL296UH090XV36C	9144531
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL296UH090XV48C	9144532
ML14XC1-042-230	TXV	41500	15.5	13	CX35-48C	EL296UH090XV60C	9144533
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL296UH110XE60C	9144534
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL296UH110XV48C	9144535
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	EL296UH110XV60C	9144536
ML14XC1-042-230	TXV	42000	16	13	CX35-48C	SL280UH090V60C	9144537
ML14XC1-042-230	TXV	42000	16	13	CX35-48C	SL280UH090XV60C	9144538
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	SL280UH110V60C	9144539
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	SL280UH110XV60C	9144540
ML14XC1-042-230	TXV	41500	15.5	13	CX35-48C	SLP98UH090XV36C	9144541
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	SLP98UH090XV48C	9144542

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	41500	15.5	13	CX35-48C	SLP98UH090XV60C	9144543
ML14XC1-042-230	TXV	41500	16	13	CX35-48C	SLP98UH110XV60C	9144544
ML14XC1-042-230	TXV	41000	14.5	12.2	CX35-48C		9144545
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL180UH090E60C	9144546
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL180UH110E60C	9144547
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL180UH110XE60C	9144548
ML14XC1-042-230	TXV	41500	16	13	CX35-49C	EL195UH090XE48C	9144549
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL195UH110XE60C	9144550
ML14XC1-042-230	TXV	41500	16	13	CX35-49C	EL296UH090XE48C	9144551
ML14XC1-042-230	TXV	41500	16	13	CX35-49C	EL296UH090XV36C	9144552
ML14XC1-042-230	TXV	41500	16	13	CX35-49C	EL296UH090XV48C	9144553
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL296UH090XV60C	9144554
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL296UH110XE60C	9144555
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL296UH110XV48C	9144556
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	EL296UH110XV60C	9144557
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	SL280UH090V60C	9144558
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	SL280UH090XV60C	9144559
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	SL280UH110V60C	9144560
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	SL280UH110XV60C	9144561
ML14XC1-042-230	TXV	41500	16	13	CX35-49C	SLP98UH090XV36C	9144562
ML14XC1-042-230	TXV	41500	16	13	CX35-49C	SLP98UH090XV48C	9144563
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	SLP98UH090XV60C	9144564
ML14XC1-042-230	TXV	42000	16	13	CX35-49C	SLP98UH110XV60C	9144565
ML14XC1-042-230	TXV	41500	14.5	12.5	CX35-49C		9144566
ML14XC1-042-230	TXV	41000	16	13	CX35-50/60C	EL180UH090E60C	9144567
ML14XC1-042-230	TXV	41000	16	13	CX35-50/60C	EL180UH110E60C	9144568
ML14XC1-042-230	TXV	41000	16	13	CX35-50/60C	EL180UH110XE60C	9144569
ML14XC1-042-230	TXV	41000	15.5	13	CX35-50/60C	EL195UH090XE48C	9144570
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-50/60C	EL195UH110XE60C	9144571
ML14XC1-042-230	TXV	41000	15.5	13	CX35-50/60C	EL296UH090XE48C	9144572
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH090XV36C	9144573
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH090XV48C	9144574
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-50/60C	EL296UH090XV60C	9144575
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-50/60C	EL296UH110XE60C	9144576
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH110XV48C	9144577
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL296UH110XV60C	9144578
ML14XC1-042-230	TXV	41500	15.5	13	CX35-50/60C	SL280UH090V60C	9144579
ML14XC1-042-230	TXV	41500	15.5	13	CX35-50/60C	SL280UH090XV60C	9144580
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	SL280UH110V60C	9144581
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	SL280UH110XV60C	9144582
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	SLP98UH090XV36C	9144583
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	SLP98UH090XV48C	9144584
ML14XC1-042-230	TXV	41500	15.5	12.5	CX35-50/60C	SLP98UH090XV60C	9144585
ML14XC1-042-230	TXV	41000	15.5	12.5	CX35-50/60C	SLP98UH110XV60C	9144586
ML14XC1-042-230	TXV	40500	14.5	12.2	CX35-50/60C		9144587
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL180UH090E60C	9144588
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL180UH110E60C	9144589
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL180UH110XE60C	9144590
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL195UH090XE48C	9144591

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGIONS -018, -024, -030, 036, -042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL195UH110XE60C	9144592
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL296UH090XE48C	9144593
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV36C	9144594
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV48C	9144595
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV60C	9144596
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL296UH110XE60C	9144597
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	EL296UH110XV60C	9144598
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SL280UH090V60C	9144599
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SL280UH090XV60C	9144600
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SL280UH110V60C	9144601
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SL280UH110XV60C	9144602
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV36C	9144603
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV48C	9144604
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV60C	9144605
ML14XC1-042-230	TXV	42000	16	13	CX35-60C	SLP98UH110XV60C	9144606
ML14XC1-042-230	TXV	42000	15.1	12.5	CX35-60C		9144607
ML14XC1-042-230	TXV	42000	16	13	CX35-60D	EL180UH135E60D	9144608
ML14XC1-042-230	TXV	42000	16	13	CX35-60D	EL195UH135XE60D	9144609
ML14XC1-042-230	TXV	42000	16	13	CX35-60D	EL296UH135XE60D	9144610
ML14XC1-042-230	TXV	42000	16	13	CX35-60D	SL280UH135V60D	9144611
ML14XC1-042-230	TXV	41500	14.5	12.5	CX35-60D		9144612
ML14XC1-042-230	TXV	41500	14.5	12.5	CX38-49C		10552252

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

REVISIONS

Sections	Description of Change
Dimensions	Updated



Visit us at www.lennox.com

For the latest technical information, www.LennoxPROs.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2017 Lennox Industries, Inc.