

LoadTECH® Filters MERV 15/15A


High-Efficiency 12-inch Extended Surface Rigid Cell Filters with E-Pleat® Media Technology

Long-Life, Energy-Savings Filters for Healthcare Applications

Parker LoadTECH® high-impact polystyrene (HIPS) HVAC filters feature proprietary E-Pleat® media technology that will rival the capacity of commercial 4-V filters in the HVAC market. The 12-inch filter has a low initial resistance and high capacity and will be of tremendous value in applications where energy and total cost of ownership are priority. Ideal for variable air volume system.

Markets:

- Schools
- Universities
- Clean manufacturing facilities
- Hospitals
- Healthcare facilities

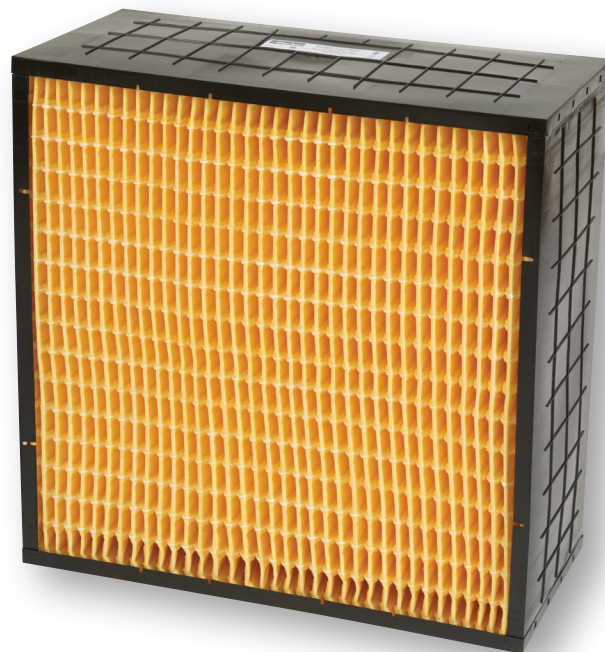

Contact Information:

Parker Hannifin Corporation
HVAC Filtration Division
100 River Ridge Circle
Jeffersonville, Indiana 47130
phone 866 247 4827
www.parker.com/HVAC

Product Features:

- Mechanical efficiency per ASHRAE 52.2 with Appendix J ensures consistent particle capture over the filter's life span.
- Reduced weight provides lower, safer, and easier maintenance.
- Proprietary E-Pleat media technology efficiently directs air flow through the filter
- Exclusive gold synthetic media with embossed design has a high capacity to capture dust
- Media resists tearing, damage, moisture, and microbial growth
- Longer filter life and fewer filter change outs with higher dust holding capacity
- 12-inch filter performance rivals the dust holding capacity of commercial 4-V filters in the HVAC market
- Energy savings – Low pressure drop offers reduced energy use
- Completely incinerable with high-impact polystyrene (HIPS) frame
- Lightweight construction
- MERV 15/15A meets the efficiency requirements to earn points toward LEED green building certification




ENGINEERING YOUR SUCCESS.


Parker LoadTECH Filters are Engineered for Long Life and Efficient Performance



Rugged frame resists cracking.


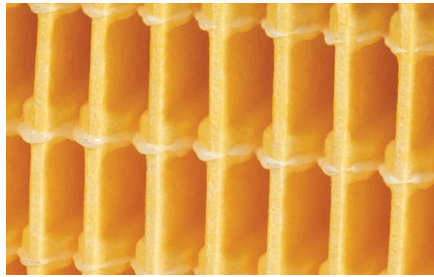


E-Pleat technology molds filtration media into a series of pre-formed channels that direct the air smoothly through the filter, allowing for even loading and complete media utilization.

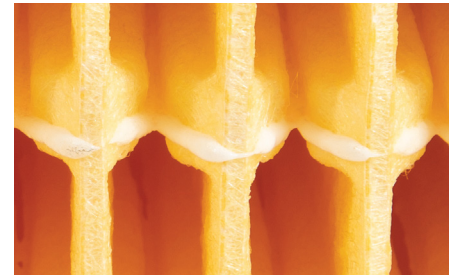

Adhesive beads bond the pleats into a rigid pack.

Parker LoadTECH – MERV 15/15A

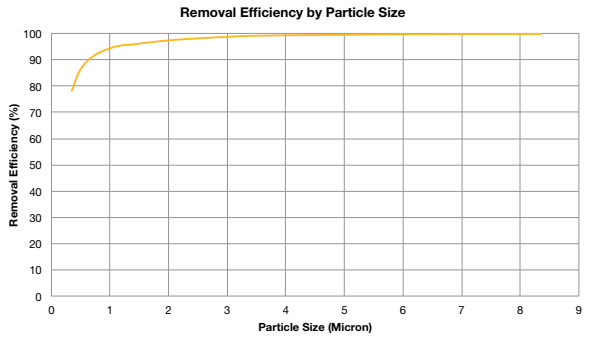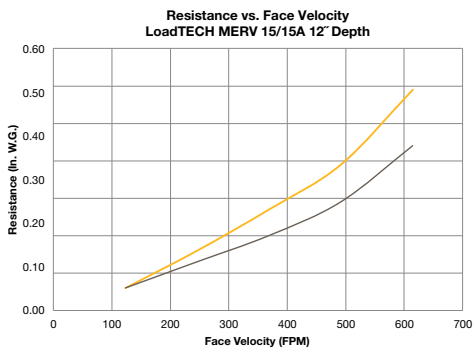


Model Number	Nominal Size (W x H x D) Inches	Actual Size (W x H x D) Inches	Rated Air Flow Capacity (CFM)	Initial Resistance (Inches W.G.) @ Rated Air Flow	Media Area (Square Feet)	MERV
Box Construction						
PLT12-M15-04-NH	24X24X12	23-3/8 x 23-3/8 x 11-1/2	2000	0.29"	146	15/15A
PLT12-M15-15-NH	20X24X12	19-3/8 x 23-3/8 x 11-1/2	1650	0.29"	119	15/15A
PLT12-M15-13-NH	20X20X12	19-3/8 x 19-3/8 x 11-1/2	1400	0.29"	99	15/15A
PLT12-M15-03-NH	12X24X12	11-3/8 x 23-3/8 x 11-1/2	1000	0.29"	73	15/15A
Single Header Construction						
PLT12-M15-04-PH	24X24X12	23-3/8 x 23-3/8 x 11-1/2	2000	0.39"	126	15/15A
PLT12-M15-15-PH	20X24X12	19-3/8 x 23-3/8 x 11-1/2	1650	0.39"	105	15/15A
PLT12-M15-13-PH	20X20X12	19-3/8 x 19-3/8 x 11-1/2	1400	0.39"	86	15/15A
PLT12-M15-03-PH	12X24X12	11-3/8 x 23-3/8 x 11-1/2	1000	0.39"	59	15/15A

- NOTES:
1. Testing per ASHRAE Standard 52.2-2017 with Appendix J. Performance based on 492 FPM face velocity for a 24x24 face size.
 2. Rated face velocity 500 FPM.
 3. Recommended final resistance 1.50" W.G.
 4. Width and height dimensions are interchangeable. Filters can be installed with pleats vertical or horizontal.
 5. Continuous Operating Temperature: 170°F (77°C).
 6. Classified per UL 900 for flammability.
 7. Special sizes not available.



Patent # 6,685,833



Your Local Authorized Parker Distributor

WARNING: This product can expose you to chemicals, including chromium, styrene, which are known to the State of California to cause cancer, and lead, which are known to the State of California to cause birth defects and other reproductive harm. For more information go to www.P65Warnings.ca.gov.

