


Connecting your Calix Gigacenter Modem/Router modem to your cyberpower battery backup

NOTICE: This must be completed before installing

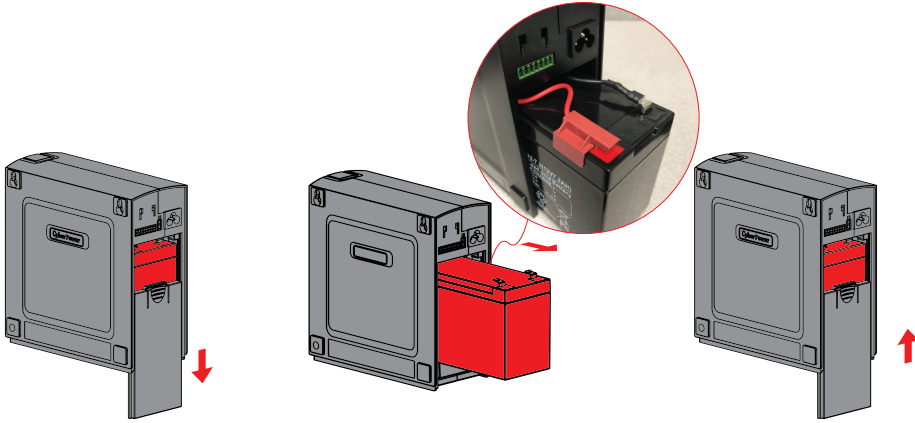

Step 1:


- a. Slide off the battery cover at the back of the battery backup unit.

Step 2:

- a. The black (-) cable comes connected to the cable connector
b. You will need to connect the red (+) cable to the cable connector.


Step 3:

- a. Slide the battery back into the compartment
b. Slide the battery cover back into position

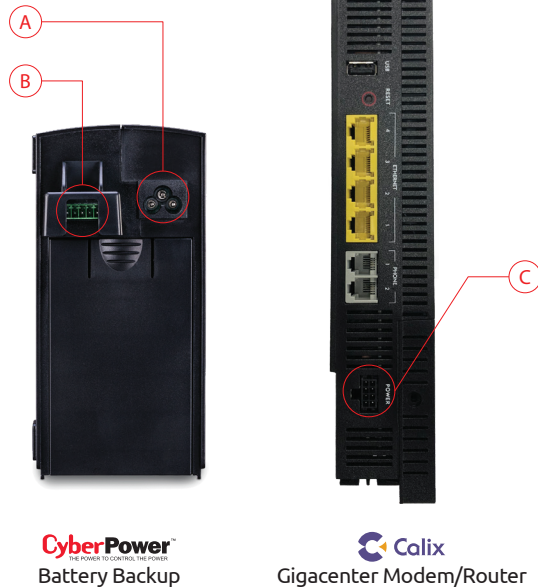


CyberPower
THE POWER TO CONTROL THE POWER
Battery Backup


Calix
Gigacenter Modem/Router

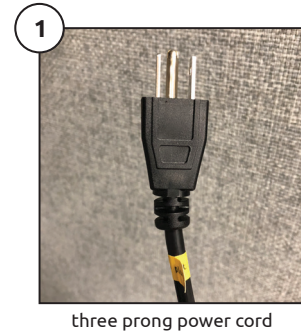


three prong power cord

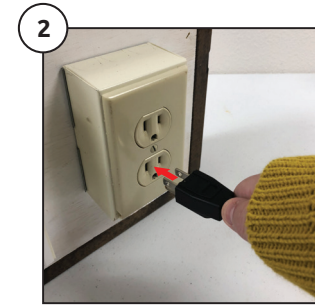


Plug the three prong power cord into wall socket

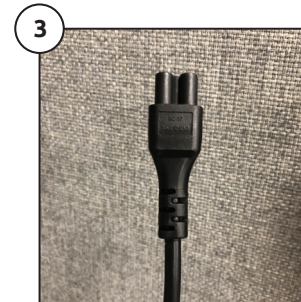


other end of three prong power cord

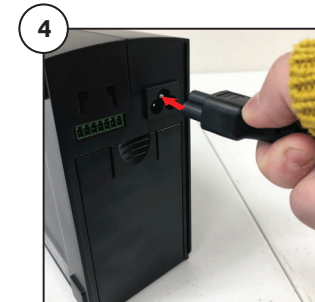


Plug other end of three prong power cord into **(A)**

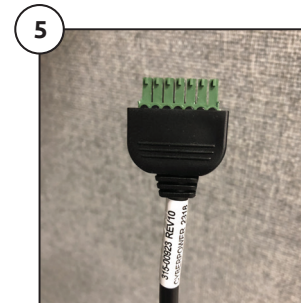


green end of power cord

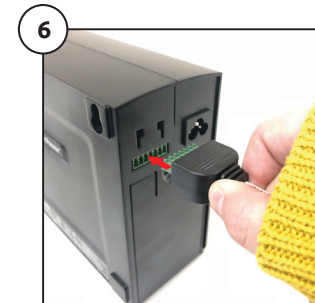

plug green end of power cord into **(B)**

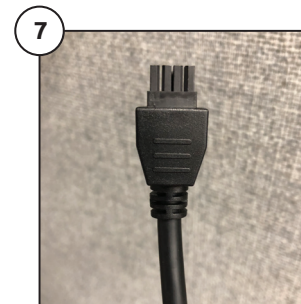

other end of green power cord

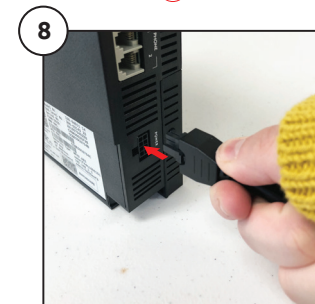

Plug other end of green power cord into **(C)**