

Reversing contactor assembly AC-3,7,5 kW/400 V,AC24V,50/60Hz
3-pole, Size S0 Spring-type terminal electrical and mechanical
Interlock 2 NO integrated



product brand name	SIRIUS
product designation	Reversing contactor assembly
product type designation	3RA23
<ul style="list-style-type: none">Manufacturer's article number 1 of the supplied contactorManufacturer's article number 2 of the supplied contactorManufacturer's article number of the supplied RH assembly kit	3RT2025-2AC20 3RT2025-2AC20 3RA2923-2AA2

General technical data	
Size of contactor	S0
<ul style="list-style-type: none">product extension auxiliary switch	Yes
insulation voltage	
<ul style="list-style-type: none">with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
protection class IP	
<ul style="list-style-type: none">on the front	IP20
Shock resistance at rectangular impulse	
<ul style="list-style-type: none">at AC	7,5g / 5 ms, 4,7g / 10 ms

• at DC	10g / 5 ms, 7,5g / 10 ms
Shock resistance with sine pulse	
• at AC	11,8g / 5 ms, 7,4g / 10 ms
• at DC	15g / 5 ms, 10g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code acc. to DIN EN 81346-2	Q

Ambient conditions	
• installation altitude at height above sea level maximum	2 000 m
• ambient temperature during operation	-25 ... +60 °C
• ambient temperature during storage	-55 ... +80 °C

Main circuit	
number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
• operating voltage at AC-3 rated value maximum	690 V
• — operating current at AC-3 at 400 V rated value	17 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	35 A
— at 110 V rated value	4.5 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	35 A
— at 110 V rated value	35 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 110 V rated value	2.5 A
• with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 110 V rated value	15 A
• with 3 current paths in series at DC-3 at DC-5	

— at 24 V rated value	35 A
— at 110 V rated value	35 A
• operating power at AC-3	
— at 400 V rated value	7.5 kW
— at 500 V rated value	10 kW
— at 690 V rated value	11 kW
• Operating power at AC-4 at 400 V rated value	7.5 kW
No-load switching frequency	1 500 1/h
operating frequency at AC-3 maximum	1 000 1/h

Control circuit/ Control

Type of voltage of the control supply voltage	AC
Control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
Operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
Apparent pick-up power of magnet coil at AC	
• at 50 Hz	65 V·A
Inductive power factor with closing power of the coil	
• at 50 Hz	0.82
Apparent holding power of magnet coil at AC	
• at 50 Hz	8.5 V·A
Inductive power factor with the holding power of the coil	
• at 50 Hz	0.25

Auxiliary circuit

• Number of NO contacts for auxiliary contacts per direction of rotation	1
• Number of NO contacts for auxiliary contacts instantaneous contact	2
Operating current of auxiliary contacts at AC-12 maximum	10 A
operating current of auxiliary contacts at AC-15	
• at 230 V	6 A
• at 400 V	3 A
operating current of auxiliary contacts at DC-13	
• at 24 V	10 A
• at 60 V	2 A
• at 110 V	1 A
• at 220 V	0.3 A

contact reliability of auxiliary contacts	< 1 error per 100 million operating cycles
UL/CSA ratings	
full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	14 A
• at 600 V rated value	17 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	1 hp
— at 230 V rated value	3 hp
• for three-phase AC motor	
— at 220/230 V rated value	5 hp
— at 460/480 V rated value	10 hp
— at 575/600 V rated value	15 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
• Design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 63 A
• Design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 25 A
• design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gG: 10 A
Installation/ mounting/ dimensions	
• mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
• mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
height	114 mm
width	90 mm
depth	97 mm
required spacing	
• with side-by-side mounting	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
• for grounded parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm

— at the side	6 mm
— downwards	6 mm
• for live parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm

Connections/ Terminals

type of electrical connection	
• for main current circuit	spring-loaded terminals
• for auxiliary and control current circuit	spring-loaded terminals
• type of connectable conductor cross-sections for main contacts solid	2x (1 ... 10 mm ²)
• type of connectable conductor cross-sections for main contacts single or multi-stranded	2x (1 ... 10 mm ²)
• type of connectable conductor cross-sections for main contacts finely stranded with core end processing	2x (1 ... 6 mm ²)
• type of connectable conductor cross-sections for main contacts finely stranded without core end processing	2x (1 ... 6 mm ²)
• type of connectable conductor cross-sections at AWG conductors for main contacts	1x (18 ... 8)
• type of connectable conductor cross-sections for auxiliary contacts single or multi-stranded	2x (0.5 ... 2.5 mm ²)
• type of connectable conductor cross-sections for auxiliary contacts finely stranded with core end processing	2x (0.5 ... 1.5 mm ²)
• type of connectable conductor cross-sections for auxiliary contacts finely stranded without core end processing	2x (0.5 ... 1.5 mm ²)
• type of connectable conductor cross-sections at AWG conductors for auxiliary contacts	2x (20 ... 14)

Safety related data





B10 value	
• with high demand rate acc. to SN 31920	1 000 000
proportion of dangerous failures	
• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	75 %
failure rate [FIT]	
• with low demand rate acc. to SN 31920	100 FIT

T1 value for proof test interval or service life acc. to IEC 61508	20 y
--	------

Communication/ Protocol

product function bus communication	Yes
• protocol is supported AS-Interface protocol	No
Product function Control circuit interface with IO link	No


Certificates/ approvals

General Product Approval	Declaration of Conformity	Test Certificates
 CSA	 UL	 EAC
	 EG-Konf.	Miscellaneous Special Test Certificate

Marine / Shipping

 ABS	 BUREAU VERITAS	 LRS	 PRS	 RINA	 RMRS
--	---	--	--	---	---

Marine / Shipping	other	Railway
-------------------	-------	---------

 DNV-GL DNVGL.COM/AF	Confirmation	Vibration and Shock
---	------------------------------	-------------------------------------

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2325-8XB30-2AC2>



Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2325-8XB30-2AC2>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RA2325-8XB30-2AC2>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2325-8XB30-2AC2&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current
<https://support.industry.siemens.com/cs/ww/en/ps/3RA2325-8XB30-2AC2/char>

Further characteristics (e.g. electrical endurance, switching frequency)
<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2325-8XB30-2AC2&objecttype=14&gridview=view1>

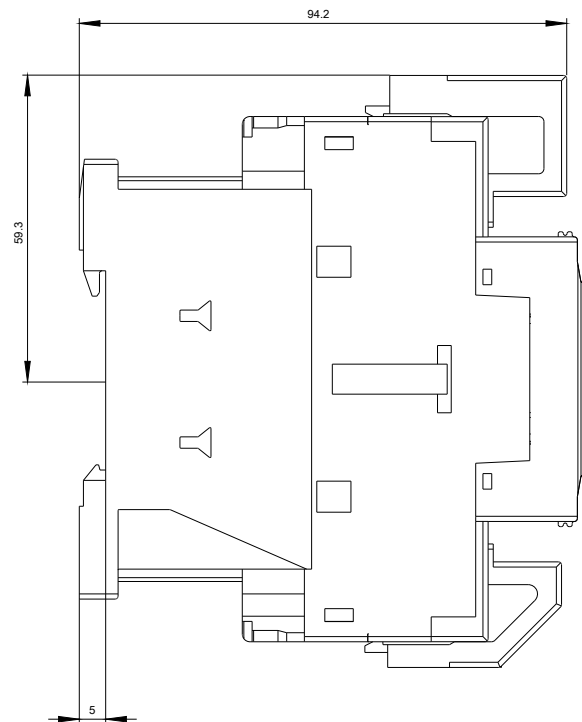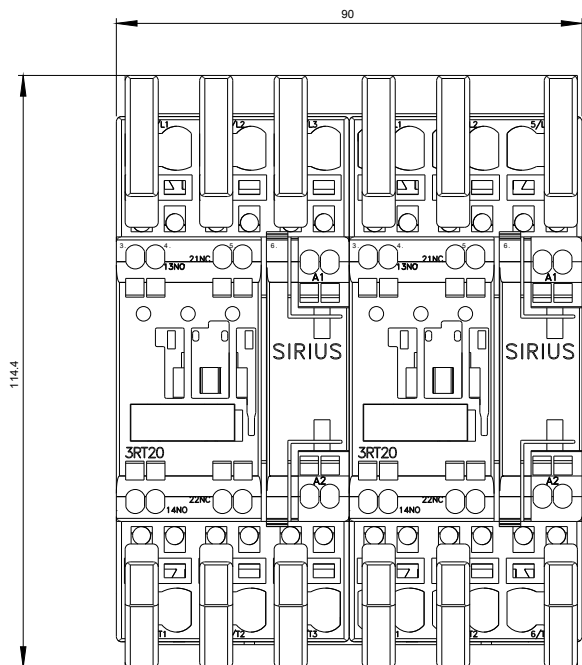

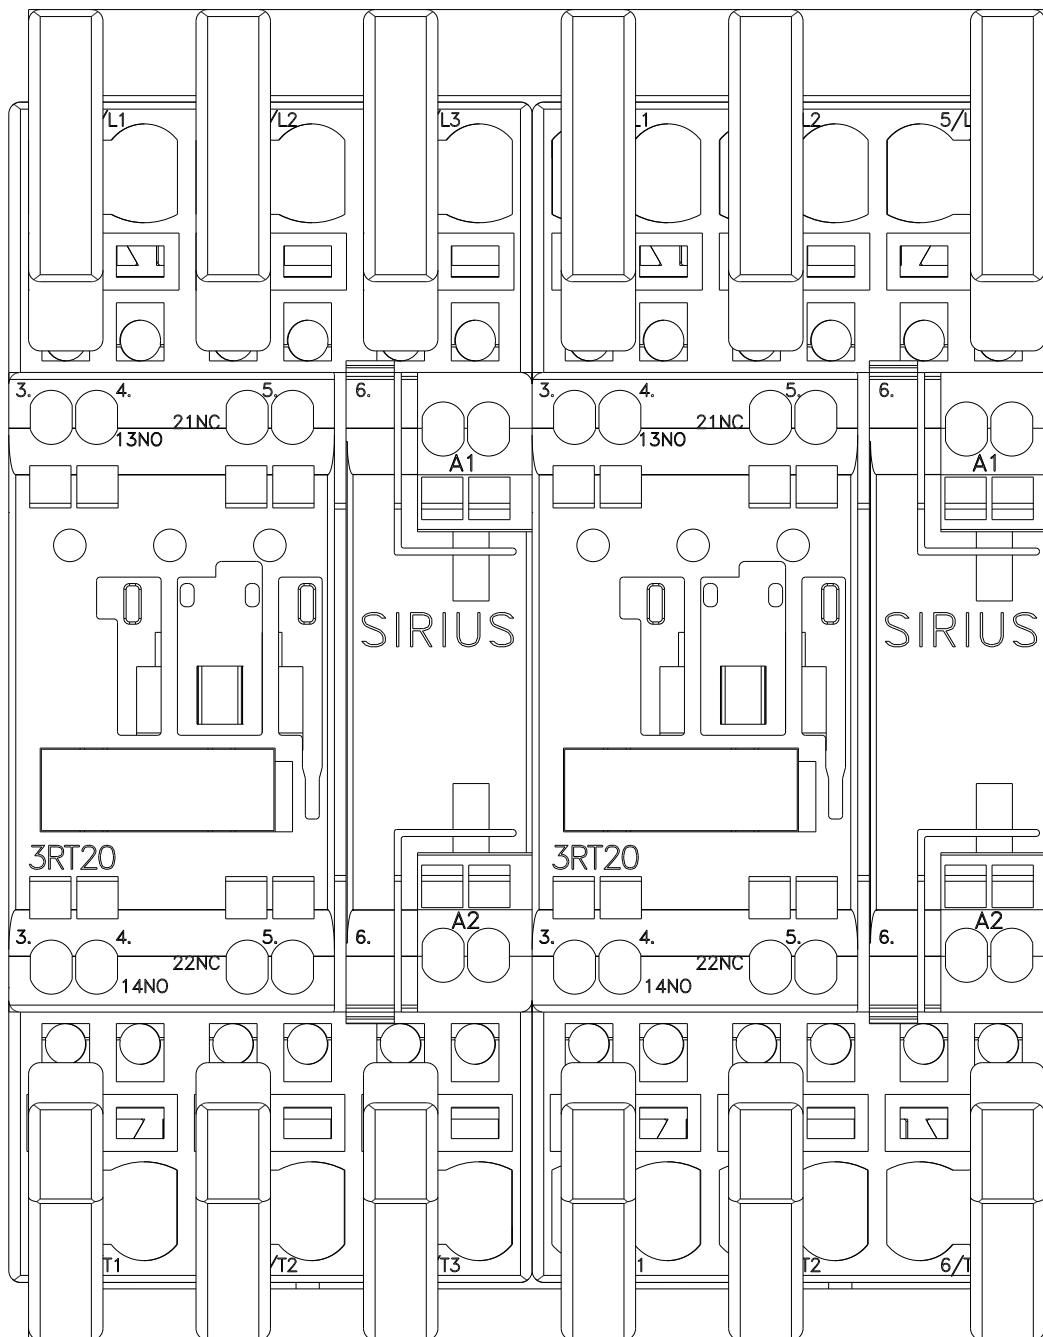

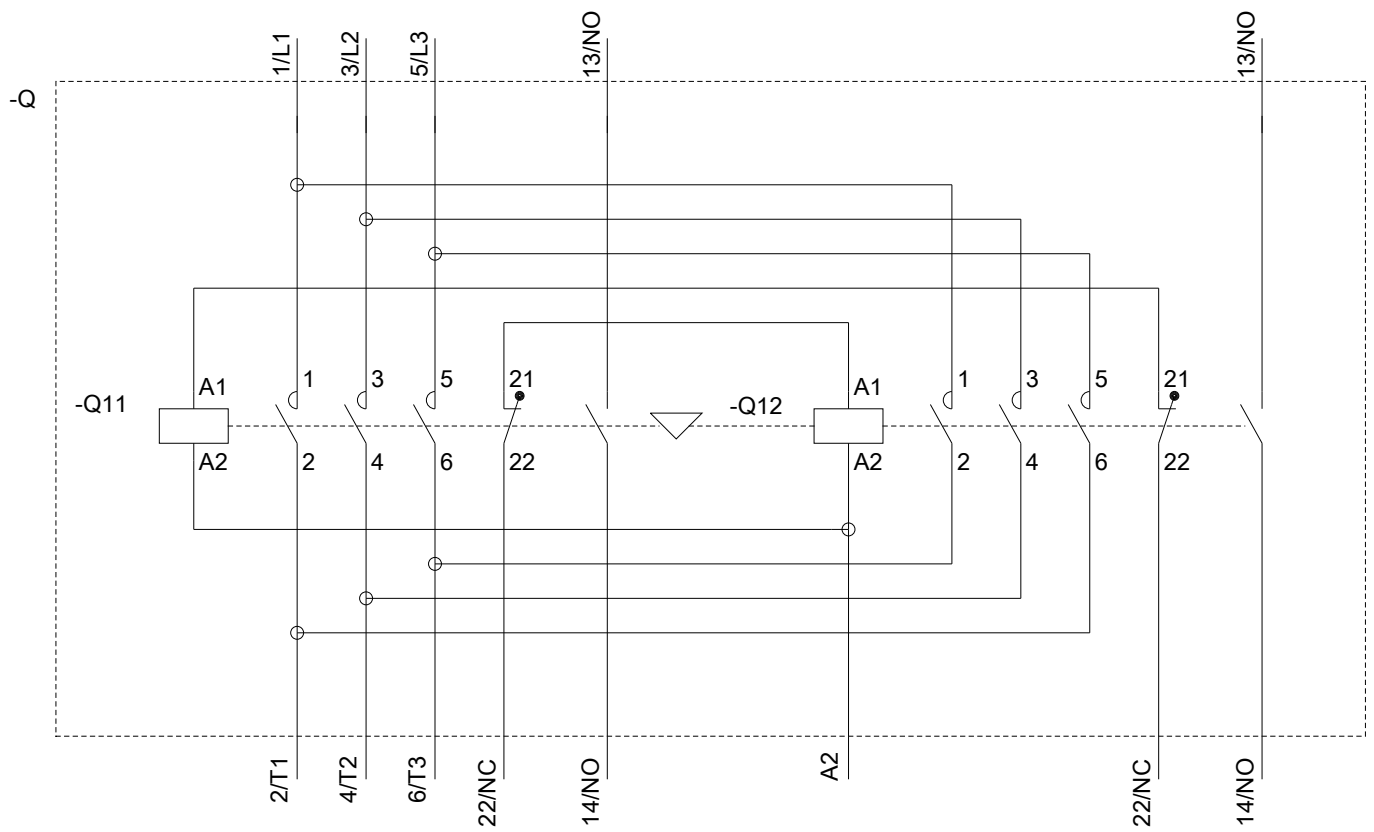

last modified:

08/25/2020