

Reversing contactor assembly for 3RA27 AC-3, 18,5 kW/400 V, 20-33 V AC/DC 3-pole, Size S2 screw terminal electrical and mechanical Interlock 2 NO integrated with voltage tap



<b>product brand name</b>	SIRIUS
<b>product designation</b>	Reversing contactor assembly
<b>product type designation</b>	3RA23
<ul style="list-style-type: none"> <li>Manufacturer's article number 1 of the supplied contactor</li> <li>Manufacturer's article number 2 of the supplied contactor</li> <li>Manufacturer's article number of the supplied RS assembly kit</li> </ul>	<a href="#">3RT2035-1NB30-0CC0</a>  <a href="#">3RT2035-1NB30</a>  <a href="#">3RA2933-2AA1</a>

General technical data	
<b>Size of contactor</b>	S2
<ul style="list-style-type: none"> <li>product extension auxiliary switch</li> </ul>	Yes
<b>insulation voltage</b>	690 V
<ul style="list-style-type: none"> <li>with degree of pollution 3 at AC rated value</li> </ul>	690 V
<b>surge voltage resistance rated value</b>	6 kV
<b>protection class IP</b>	IP20
<ul style="list-style-type: none"> <li>on the front</li> </ul>	IP20
<b>Shock resistance at rectangular impulse</b>	7.7g / 5 ms, 4.5g / 10 ms
<ul style="list-style-type: none"> <li>at AC</li> </ul>	7.7g / 5 ms, 4.5g / 10 ms

<ul style="list-style-type: none"> <li>• at DC</li> </ul>	7.7g / 5 ms, 4.5g / 10 ms
<b>Shock resistance with sine pulse</b>	
<ul style="list-style-type: none"> <li>• at AC</li> </ul>	12g / 5 ms, 7g / 10 ms
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	12g / 5 ms, 7g / 10 ms
<b>Mechanical service life (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• of contactor typical</li> </ul>	10 000 000
<ul style="list-style-type: none"> <li>• of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
<b>reference code acc. to DIN EN 81346-2</b>	Q

### Ambient conditions

<ul style="list-style-type: none"> <li>• installation altitude at height above sea level maximum</li> </ul>	2 000 m
<ul style="list-style-type: none"> <li>• ambient temperature during operation</li> </ul>	-25 ... +60 °C
<ul style="list-style-type: none"> <li>• ambient temperature during storage</li> </ul>	-55 ... +80 °C

### Main circuit

<b>number of poles for main current circuit</b>	3
<b>Number of NO contacts for main contacts</b>	0
<b>Number of NC contacts for main contacts</b>	0
<ul style="list-style-type: none"> <li>• operating voltage at AC-3 rated value maximum</li> </ul>	690 V
<ul style="list-style-type: none"> <li>• <ul style="list-style-type: none"> <li>— operating current at AC-3 at 400 V rated value</li> </ul> </li> </ul>	41 A
<b>Operating current</b>	
<ul style="list-style-type: none"> <li>• at 1 current path at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>	55 A 4.5 A
<ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>	55 A 25 A
<ul style="list-style-type: none"> <li>• with 3 current paths in series at DC-1 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>	55 A 55 A
<b>Operating current</b>	
<ul style="list-style-type: none"> <li>• at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>	35 A 2.5 A
<ul style="list-style-type: none"> <li>• with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> <li>— at 24 V rated value</li> <li>— at 110 V rated value</li> </ul> </li> </ul>	55 A 25 A
<ul style="list-style-type: none"> <li>• with 3 current paths in series at DC-3 at DC-5</li> </ul>	

— at 24 V rated value	55 A
— at 110 V rated value	55 A
• operating power at AC-3	
— at 400 V rated value	18.5 kW
— at 690 V rated value	18.5 kW
• Operating power at AC-4 at 400 V rated value	18.5 kW
<b>No-load switching frequency</b>	1 500 1/h
operating frequency at AC-3 maximum	1 000 1/h

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC/DC
<b>Control supply voltage 1 at AC</b>	
• at 50 Hz	20 ... 33 V
• at 60 Hz	20 ... 33 V
<b>Control supply voltage 1</b>	
• at DC	20 ... 33 V
<b>Operating range factor control supply voltage rated value of magnet coil at AC</b>	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
<b>Design of the surge suppressor</b>	with varistor
<b>Apparent pick-up power of magnet coil at AC</b>	
• at 50 Hz	40 V·A
• at 60 Hz	40 V·A
<b>Inductive power factor with closing power of the coil</b>	
• at 50 Hz	0.64
• at 60 Hz	0.5
<b>Apparent holding power of magnet coil at AC</b>	
• at 50 Hz	2 V·A
• at 60 Hz	2 V·A
<b>Inductive power factor with the holding power of the coil</b>	
• at 50 Hz	0.36
• at 60 Hz	0.39
<b>Closing power of magnet coil at DC</b>	23 W
<b>Holding power of magnet coil at DC</b>	1 W

### Auxiliary circuit

• Number of NC contacts for auxiliary contacts per direction of rotation	0
• Number of NO contacts for auxiliary contacts per direction of rotation	1
• Number of NO contacts for auxiliary contacts instantaneous contact	2

<b>Operating current of auxiliary contacts at AC-12 maximum</b>	10 A
<b>operating current of auxiliary contacts at AC-15</b>	
• at 230 V	6 A
• at 400 V	3 A
<b>operating current of auxiliary contacts at DC-13</b>	
• at 24 V	10 A
• at 60 V	2 A
• at 110 V	1 A
• at 220 V	0.3 A
<b>contact reliability of auxiliary contacts</b>	< 1 error per 100 million operating cycles

### UL/CSA ratings

<b>full-load current (FLA) for three-phase AC motor</b>	
• at 480 V rated value	40 A
• at 600 V rated value	41 A
<b>yielded mechanical performance [hp]</b>	
• for single-phase AC motor	
— at 110/120 V rated value	3 hp
— at 230 V rated value	7.5 hp
• for three-phase AC motor	
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	30 hp
— at 575/600 V rated value	40 hp
<b>contact rating of auxiliary contacts according to UL</b>	A600 / Q600

### Short-circuit protection

• Design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A
• Design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 80 A
• design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gG: 10 A

### Installation/ mounting/ dimensions

• <b>mounting position</b>	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
• <b>mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail
<b>height</b>	141 mm
<b>width</b>	120 mm
<b>depth</b>	130 mm
<b>required spacing</b>	

• with side-by-side mounting	
— forwards	10 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm
• for grounded parts	
— forwards	10 mm
— backwards	0 mm
— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— backwards	0 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm

## Connections/ Terminals

<b>type of electrical connection</b>	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
• type of connectable conductor cross-sections for main contacts solid	2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )
• type of connectable conductor cross-sections for main contacts single or multi-stranded	2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> )
• type of connectable conductor cross-sections for main contacts finely stranded with core end processing	2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> )
• type of connectable conductor cross-sections at AWG conductors for main contacts	2x (18 ... 2), 1x (18 ... 1)
• type of connectable conductor cross-sections for auxiliary contacts single or multi-stranded	2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )
• type of connectable conductor cross-sections for auxiliary contacts finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
• type of connectable conductor cross-sections at AWG conductors for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14)

## Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	1 000 000
<b>proportion of dangerous failures</b>	

• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	73 %
<b>failure rate [FIT]</b>	
• with low demand rate acc. to SN 31920	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y

Communication/ Protocol	
<b>product function bus communication</b>	Yes
• protocol is supported AS-Interface protocol	No
Product function Control circuit interface with IO link	No

Certificates/ approvals		
General Product Approval	Declaration of Conformity	Test Certificates



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

### Marine / Shipping



### other

[Confirmation](#)

### Further information

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2335-8XE30-1NB3>

#### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2335-8XE30-1NB3>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2335-8XE30-1NB3>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA2335-8XE30-1NB3&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2335-8XE30-1NB3&lang=en)


#### Characteristic: Tripping characteristics, I<sup>Δt</sup>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2335-8XE30-1NB3/char>

#### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2335-8XE30-1NB3&objectype=14&gridview=view1>

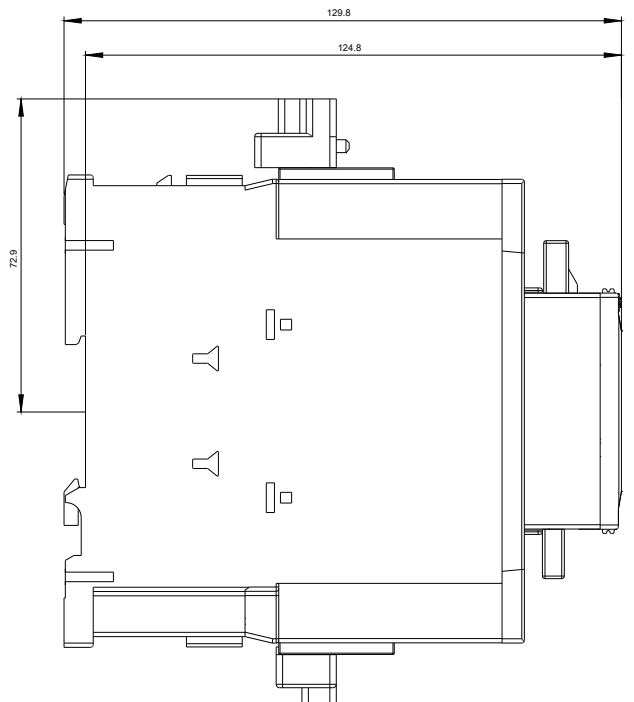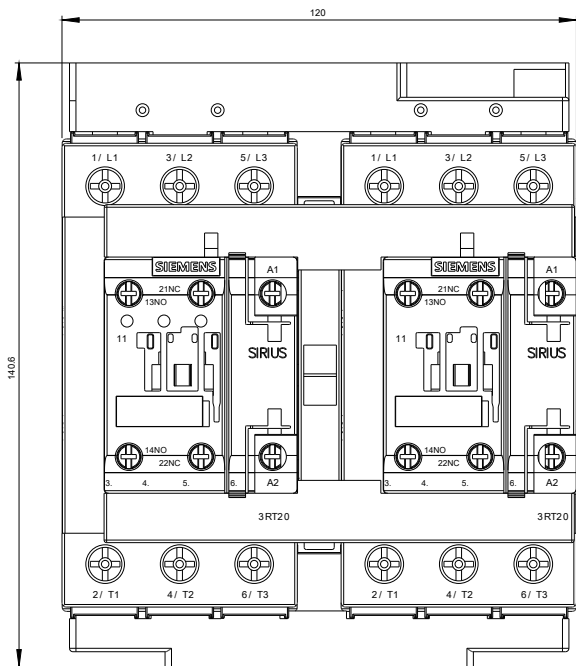

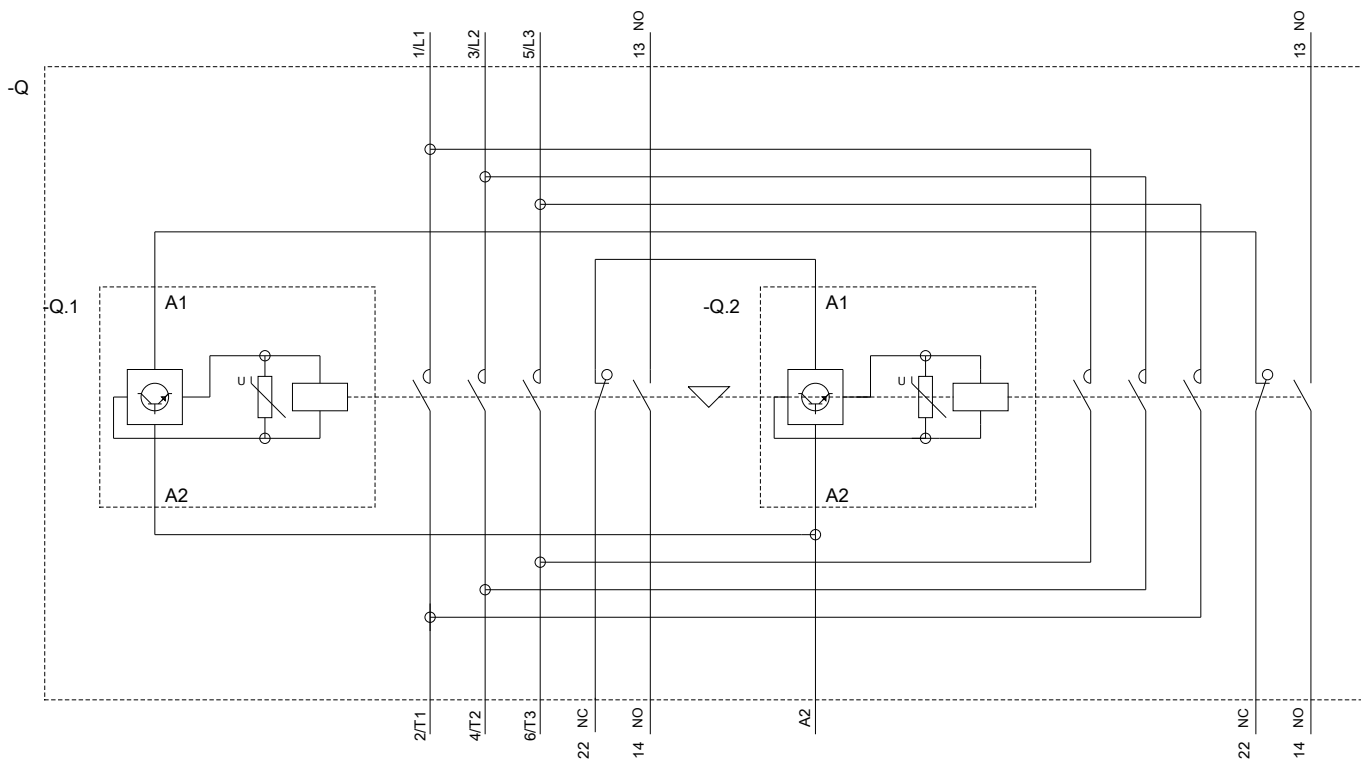

last modified:

08/25/2020