

power contactor, AC-3 80 A, 37 kW / 400 V 1 NO + 1 NC, 20-33 V  
AC/DC 3-pole, 3 NO, Size S3 screw terminal integrated varistor



product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2

**General technical data**

<b>Size of contactor</b>	S3
<ul style="list-style-type: none"> <li>• Product extension function module for communication</li> </ul>	No
<ul style="list-style-type: none"> <li>• product extension auxiliary switch</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• power loss [W] for rated value of the current at AC in hot operating state</li> </ul>	15.9 W
<ul style="list-style-type: none"> <li>• power loss [W] for rated value of the current at AC in hot operating state per pole</li> </ul>	5.3 W
<b>power loss [W] for rated value of the current without load current share typical</b>	3.5 W
<b>Surge voltage resistance</b>	
<ul style="list-style-type: none"> <li>• of main circuit rated value</li> </ul>	8 kV
<ul style="list-style-type: none"> <li>• of auxiliary circuit rated value</li> </ul>	6 kV
<b>maximum permissible voltage for safe isolation</b>	

<ul style="list-style-type: none"> <li>• between coil and main contacts acc. to EN 60947-1</li> </ul>	690 V
<b>protection class IP</b> <ul style="list-style-type: none"> <li>• on the front</li> <li>• of the terminal</li> </ul>	IP20 IP00
<b>Shock resistance at rectangular impulse</b> <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>	6.7 g / 5 ms, 4.0 g / 10 ms 6.7 g / 5 ms, 4.0 g / 10 ms
<b>Shock resistance with sine pulse</b> <ul style="list-style-type: none"> <li>• at AC</li> <li>• at DC</li> </ul>	10.6 g / 5 ms, 6.3 g / 10 ms 10.6 g / 5 ms, 6.3 g / 10 ms
<b>Mechanical service life (switching cycles)</b> <ul style="list-style-type: none"> <li>• of contactor typical</li> <li>• of the contactor with added electronics-compatible auxiliary switch block typical</li> <li>• of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000 5 000 000 10 000 000
<b>reference code acc. to DIN EN 81346-2</b>	Q

#### Ambient conditions

<ul style="list-style-type: none"> <li>• installation altitude at height above sea level maximum</li> </ul>	2 000 m
<ul style="list-style-type: none"> <li>• ambient temperature during operation</li> <li>• ambient temperature during storage</li> </ul>	-25 ... +60 °C -55 ... +80 °C

#### Main circuit

<b>number of poles for main current circuit</b>	3
<b>Number of NO contacts for main contacts</b>	3
<ul style="list-style-type: none"> <li>• operating voltage at AC-3 rated value maximum</li> </ul>	1 000 V
<ul style="list-style-type: none"> <li>• Operating current at AC-1 at 400 V <ul style="list-style-type: none"> <li>— at ambient temperature 40 °C rated value</li> </ul> </li> </ul>	125 A
<ul style="list-style-type: none"> <li>• Operating current at AC-1 <ul style="list-style-type: none"> <li>— up to 690 V at ambient temperature 40 °C rated value</li> <li>— up to 690 V at ambient temperature 60 °C rated value</li> <li>— up to 1000 V at ambient temperature 40 °C rated value</li> <li>— up to 1000 V at ambient temperature 60 °C rated value</li> </ul> </li> </ul>	125 A 105 A 60 A 50 A
<ul style="list-style-type: none"> <li>• Operating current at AC-2 at 400 V rated value</li> <li>• <ul style="list-style-type: none"> <li>— operating current at AC-3 at 400 V rated value</li> </ul> </li> </ul>	80 A 80 A

— Operating current at AC-3 at 500 V rated value	80 A
— Operating current at AC-3 at 690 V rated value	58 A
• Operating current at AC-4 at 400 V rated value	66 A
• Operating current at AC-5a up to 690 V rated value	110 A
• Operating current at AC-5b up to 400 V rated value	80 A
• Operating current at AC-6a	
— up to 230 V for current peak value n=20 rated value	80 A
— up to 400 V for current peak value n=20 rated value	80 A
— up to 500 V for current peak value n=20 rated value	80 A
— up to 690 V for current peak value n=20 rated value	58 A
• Operating current at AC-6a	
— up to 230 V for current peak value n=30 rated value	54 A
— up to 400 V for current peak value n=30 rated value	54 A
— up to 500 V for current peak value n=30 rated value	54 A
— up to 690 V for current peak value n=30 rated value	54 A
<b>Minimum cross-section in main circuit</b>	
• at maximum AC-1 rated value	50 mm <sup>2</sup>
<b>Operating current for approx. 200000 operating cycles at AC-4</b>	
• at 400 V rated value	34 A
• at 690 V rated value	24 A
<b>Operating current</b>	
• at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
• with 2 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	10 A

— at 440 V rated value	1.8 A
— at 600 V rated value	1 A
• with 3 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	80 A
— at 440 V rated value	4.5 A
— at 600 V rated value	2.6 A
<b>Operating current</b>	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	40 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.15 A
— at 600 V rated value	0.06 A
• with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	7 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.16 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	35 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.35 A
• Operating power at AC-2 at 400 V rated value	37 kW
•	
— operating power at AC-3 at 230 V rated value	22 kW
— operating power at AC-3 at 400 V rated value	37 kW
— operating power at AC-3 at 500 V rated value	45 kW
— operating power at AC-3 at 690 V rated value	55 kW
<b>Operating power for approx. 200000 operating cycles at AC-4</b>	
• at 400 V rated value	17.9 kW
• at 690 V rated value	21.8 kW
<b>Operating apparent output at AC-6a</b>	

<ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=20 rated value</li> </ul>	31 kV·A
<ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=20 rated value</li> </ul>	55 kV·A
<ul style="list-style-type: none"> <li>• up to 500 V for current peak value n=20 rated value</li> </ul>	69 kV·A
<ul style="list-style-type: none"> <li>• up to 690 V for current peak value n=20 rated value</li> </ul>	69 kV·A
<b>Operating apparent output at AC-6a</b>	
<ul style="list-style-type: none"> <li>• up to 230 V for current peak value n=30 rated value</li> </ul>	21.5 kV·A
<ul style="list-style-type: none"> <li>• up to 400 V for current peak value n=30 rated value</li> </ul>	37.4 kV·A
<ul style="list-style-type: none"> <li>• up to 500 V for current peak value n=30 rated value</li> </ul>	46.7 kV·A
<ul style="list-style-type: none"> <li>• up to 690 V for current peak value n=30 rated value</li> </ul>	64.5 kV·A
<b>Short-time withstand current in cold operating state up to 40 °C</b>	
<ul style="list-style-type: none"> <li>• limited to 1 s switching at zero current maximum</li> </ul>	1 500 A; Use minimum cross-section acc. to AC-1 rated value
<ul style="list-style-type: none"> <li>• limited to 5 s switching at zero current maximum</li> </ul>	1 186 A; Use minimum cross-section acc. to AC-1 rated value
<ul style="list-style-type: none"> <li>• limited to 10 s switching at zero current maximum</li> </ul>	851 A; Use minimum cross-section acc. to AC-1 rated value
<ul style="list-style-type: none"> <li>• limited to 30 s switching at zero current maximum</li> </ul>	538 A; Use minimum cross-section acc. to AC-1 rated value
<ul style="list-style-type: none"> <li>• limited to 60 s switching at zero current maximum</li> </ul>	423 A; Use minimum cross-section acc. to AC-1 rated value
<b>No-load switching frequency</b>	
<ul style="list-style-type: none"> <li>• at AC</li> </ul>	1 000 1/h
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	1 000 1/h
<ul style="list-style-type: none"> <li>• Operating frequency at AC-1 maximum</li> </ul>	900 1/h
<ul style="list-style-type: none"> <li>• Operating frequency at AC-2 maximum</li> </ul>	400 1/h
<ul style="list-style-type: none"> <li>• operating frequency at AC-3 maximum</li> </ul>	1 000 1/h
<ul style="list-style-type: none"> <li>• Operating frequency at AC-4 maximum</li> </ul>	300 1/h
<b>Control circuit/ Control</b>	
<b>Type of voltage of the control supply voltage</b>	AC/DC
<ul style="list-style-type: none"> <li>• control supply voltage at AC at 50 Hz rated value</li> </ul>	20 ... 33 V
<ul style="list-style-type: none"> <li>• control supply voltage at AC at 60 Hz rated value</li> </ul>	20 ... 33 V
<b>control supply voltage at DC</b>	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	20 ... 33 V

<b>Operating range factor control supply voltage rated value of magnet coil at DC</b>	
• initial value	0.8
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value of magnet coil at AC</b>	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
<b>Design of the surge suppressor</b>	with varistor
<b>Inrush current peak</b>	6.5 A
<b>Duration of inrush current peak</b>	50 µs
<b>starting current average value</b>	3.2 A
<b>Peak starting current</b>	6.5 A
<b>Duration of starting current</b>	150 ms
<b>Holding current average value</b>	75 mA
<b>Apparent pick-up power of magnet coil at AC</b>	
• at 50 Hz	151 V·A
• at 60 Hz	151 V·A
<b>Apparent holding power of magnet coil at AC</b>	
• at 50 Hz	3.5 V·A
• at 60 Hz	3.5 V·A
<b>Closing power of magnet coil at DC</b>	76 W
<b>Holding power of magnet coil at DC</b>	2.7 W
<b>Closing delay</b>	
• at DC	50 ... 70 ms
<b>Opening delay</b>	
• at DC	38 ... 57 ms
<b>Arcing time</b>	10 ... 20 ms
<b>Control version of the switch operating mechanism</b>	Standard A1 - A2

<b>Auxiliary circuit</b>	
• Number of NC contacts for auxiliary contacts instantaneous contact	1
• Number of NO contacts for auxiliary contacts instantaneous contact	1
<b>Operating current at AC-12 maximum</b>	10 A
<b>Operating current at AC-15</b>	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
• Operating current at DC-12 at 24 V rated value	10 A
• operating current at DC-12 at 48 V rated value	6 A

<ul style="list-style-type: none"> <li>• Operating current at DC-12 at 60 V rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>• operating current at DC-12 at 110 V rated value</li> </ul>	3 A
<ul style="list-style-type: none"> <li>• Operating current at DC-12 at 125 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>• Operating current at DC-12 at 220 V rated value</li> </ul>	1 A
<ul style="list-style-type: none"> <li>• Operating current at DC-12 at 600 V rated value</li> </ul>	0.15 A
<ul style="list-style-type: none"> <li>• Operating current at DC-13 at 24 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>• operating current at DC-13 at 48 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>• Operating current at DC-13 at 60 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>• operating current at DC-13 at 110 V rated value</li> </ul>	1 A
<ul style="list-style-type: none"> <li>• Operating current at DC-13 at 125 V rated value</li> </ul>	0.9 A
<ul style="list-style-type: none"> <li>• Operating current at DC-13 at 220 V rated value</li> </ul>	0.3 A
<ul style="list-style-type: none"> <li>• Operating current at DC-13 at 600 V rated value</li> </ul>	0.1 A
<b>contact reliability of auxiliary contacts</b>	1 faulty switching per 100 million (17 V, 1 mA)

#### UL/CSA ratings

<b>full-load current (FLA) for three-phase AC motor</b>	
<ul style="list-style-type: none"> <li>• at 480 V rated value</li> </ul>	77 A
<ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>	62 A
<b>yielded mechanical performance [hp]</b>	
<ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> </ul>	7.5 hp 15 hp
<ul style="list-style-type: none"> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>	25 hp 30 hp 60 hp 60 hp
<b>contact rating of auxiliary contacts according to UL</b>	A600 / P600

#### Short-circuit protection

<ul style="list-style-type: none"> <li>• Design of the fuse link for short-circuit protection of the main circuit with type of coordination 1 required</li> </ul>	gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA)
<ul style="list-style-type: none"> <li>• Design of the fuse link for short-circuit protection of the main circuit with type of assignment 2 required</li> </ul>	gG: 160A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA)
<ul style="list-style-type: none"> <li>• design of the fuse link for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 10 A (500 V, 1 kA)

## Installation/ mounting/ dimensions

<ul style="list-style-type: none"> <li>• <b>mounting position</b></li> </ul>	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
<ul style="list-style-type: none"> <li>• <b>mounting type</b></li> </ul>	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
<ul style="list-style-type: none"> <li>• mounting type side-by-side mounting</li> </ul>	Yes
<b>height</b>	140 mm
<b>width</b>	70 mm
<b>depth</b>	152 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	20 mm 10 mm 10 mm 0 mm  20 mm 10 mm 10 mm 10 mm  20 mm 10 mm 10 mm 10 mm

## Connections/ Terminals

<ul style="list-style-type: none"> <li>• type of electrical connection for main current circuit</li> </ul>	screw-type terminals
<ul style="list-style-type: none"> <li>• type of electrical connection for auxiliary and control current circuit</li> </ul>	screw-type terminals
<ul style="list-style-type: none"> <li>• Type of electrical connection at contactor for auxiliary contacts</li> </ul>	Screw-type terminals
<ul style="list-style-type: none"> <li>• Type of electrical connection of magnet coil</li> </ul>	Screw-type terminals
<ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections for main contacts finely stranded with core end processing</li> </ul>	2x (2.5 ... 35 mm <sup>2</sup> ), 1x (2.5 ... 50 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections at AWG conductors for main contacts</li> </ul>	2x (10 ... 1/0), 1x (10 ... 2)
<b>connectable conductor cross-section for main contacts</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>	2.5 ... 16 mm <sup>2</sup> 6 ... 70 mm <sup>2</sup>



<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	2.5 ... 50 mm <sup>2</sup>
<b>connectable conductor cross-section for auxiliary contacts</b>	
<ul style="list-style-type: none"> <li>single or multi-stranded</li> </ul>	0.5 ... 2.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	0.5 ... 2.5 mm <sup>2</sup>
<ul style="list-style-type: none"> <li>type of connectable conductor cross-sections for auxiliary contacts single or multi-stranded</li> </ul>	2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>type of connectable conductor cross-sections for auxiliary contacts finely stranded with core end processing</li> </ul>	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>type of connectable conductor cross-sections at AWG conductors for auxiliary contacts</li> </ul>	2x (20 ... 16), 2x (18 ... 14)
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>for main contacts</li> </ul>	10 ... 2
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	20 ... 14

Safety related data	
<b>B10 value</b>	
<ul style="list-style-type: none"> <li>with high demand rate acc. to SN 31920</li> </ul>	1 000 000
<b>proportion of dangerous failures</b>	
<ul style="list-style-type: none"> <li>with low demand rate acc. to SN 31920</li> </ul>	40 %
<ul style="list-style-type: none"> <li>with high demand rate acc. to SN 31920</li> </ul>	73 %
<b>failure rate [FIT]</b>	
<ul style="list-style-type: none"> <li>with low demand rate acc. to SN 31920</li> </ul>	100 FIT
<b>Product function</b>	
<ul style="list-style-type: none"> <li>Mirror contact acc. to IEC 60947-4-1</li> </ul>	Yes
<ul style="list-style-type: none"> <li>positively driven operation acc. to IEC 60947-5-1</li> </ul>	No
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y
<b>protection against electrical shock</b>	finger-safe when touched vertically from front acc. to IEC 60529
Suitability for use safety-related switching OFF	Yes

### Certificates/ approvals

General Product Approval	EMC
--------------------------	-----



[KC](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping	other	Railway
-------------------	-------	---------



[Confirmation](#)

[Vibration and Shock](#)

Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2045-1NB30>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2045-1NB30>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1NB30>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**




[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2045-1NB30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2045-1NB30&lang=en)


**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2045-1NB30/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2045-1NB30&objecttype=14&gridview=view1>

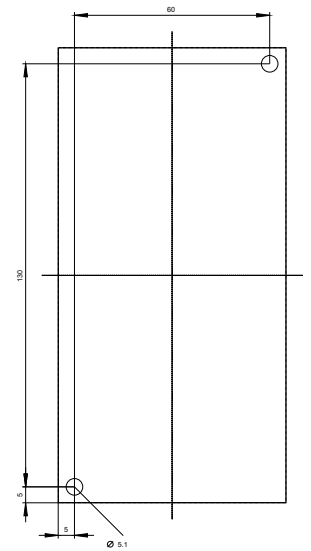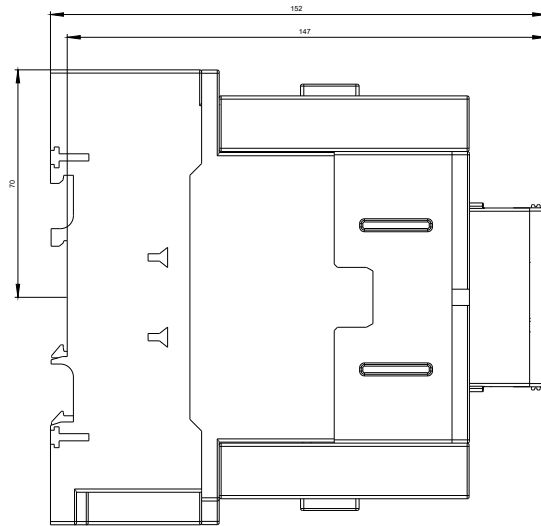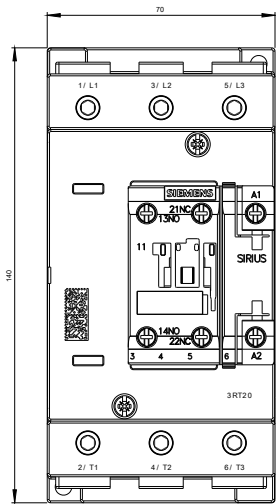

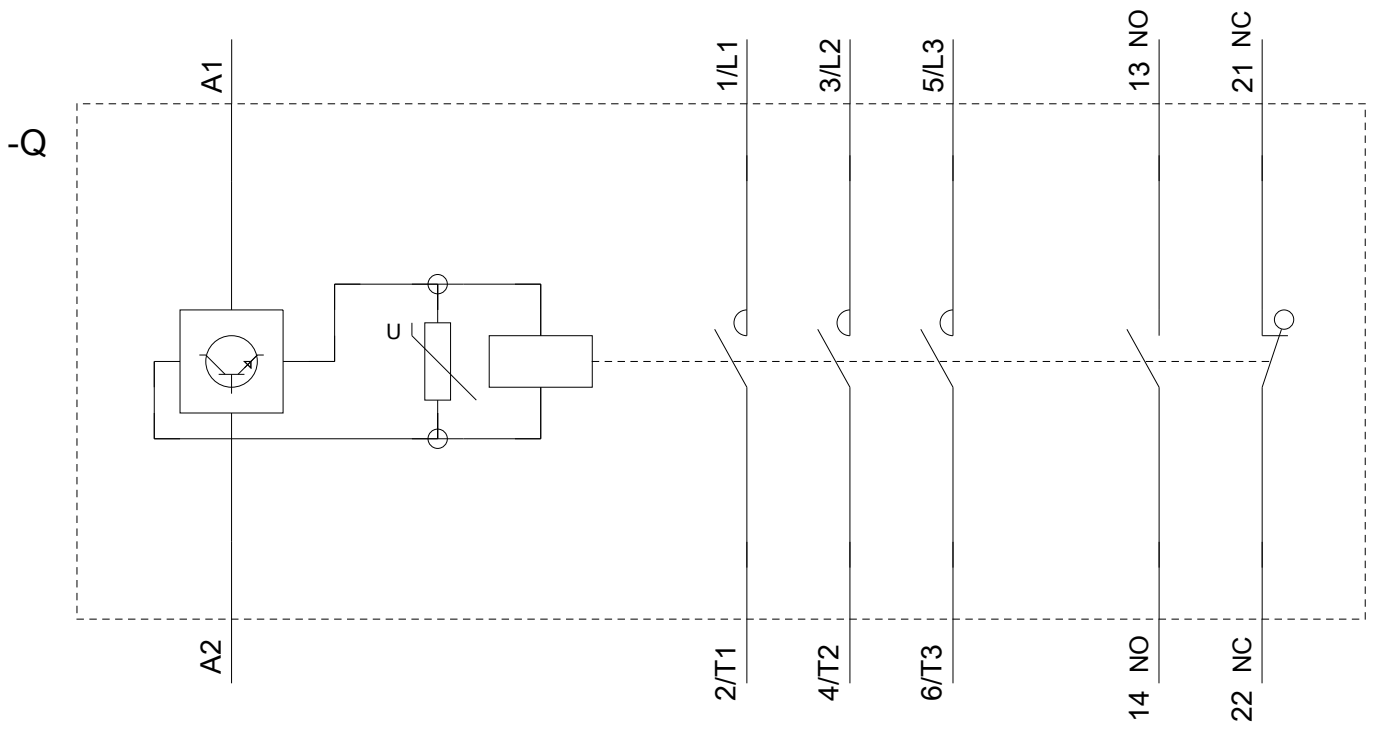

last modified:

08/27/2020