


SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON OR TPU	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	5x22 AWG	
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	

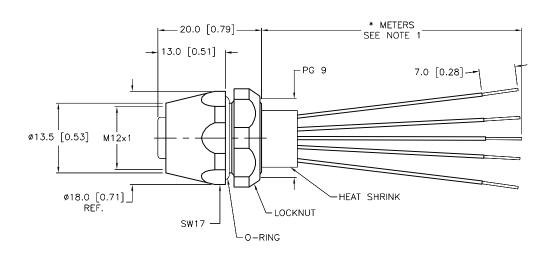

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

REV DESCRIPTION

E ADD HEAT SHRINK PER ECO

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFC LENGTHS.

		FINISH	
16	55921	SEE	SPECIFICATIONS
	ECO NO.		

08/02/

DATE

2.

3.

MATERIAL

RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY SEE SPECIFICATIONS

CONTACT TURCK FOR MORE INFORMATION

RDS APVD

DATE 05/28/03 SCALE 1=.8 UNIT OF MEASUREMENT

turck iac High Technology Sensors and Automation Controls

DESCRIPTION

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax

turck.com

FKV 4.5-*

IDENTIFICATION NO. REV

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

FILE: 777001576 SHEET 1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY