


- Rectangular, height 8 mm
- Active face on top
- Factor 1 for all metals
- Increased switching distance
- Protection class IP68
- Resistant to magnetic fields
- Auto-compensation protects against pre-attenuation
- Flush mounted installation on up to 4 sides
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- Cable connection

|                                    |   |
|------------------------------------|---|
| <b>Type code</b>                   | Ni4U-Q8SE-AN6X  |
| Ident-No.                          | 4635809   |
| Ident-No (TUSA)                    | S4635809  |
| <b>Rated switching distance Sn</b> | 4 mm  |
| Mounting conditions                | non-flush, flush mountable                                    |
| Assured switching distance         | $\leq (0,81 \times S_n)$ mm                                   |
| Repeatability                      | $\leq 2\%$ of full scale                                      |
| Temperature drift                  | $\leq \pm 10\%$   |
|                                    | $\leq \pm 15\%$ , $\leq -25\text{ °C}$ v $\geq +70\text{ °C}$ |
| Hysteresis                         | 3...15 %  |
| Ambient temperature                | -30...+85 °C  |

#### Wiring diagram

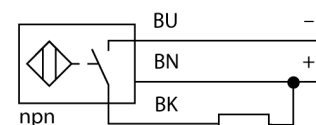

#### Functional principle

Inductive sensors detect metal objects contactless and wear-free. Due to the patented multi-coil system, *uprox*®+ sensors have distinct advantages over conventional sensors. They excel in largest switching distances, maximum flexibility and operational reliability as well as efficient standardization.



|   |                         |
|---|-------------------------|
| <b>Operating voltage</b>                    | 10...30VDC              |
| Residual ripple                             | $\leq 10\%$ $U_{in}$    |
| DC rated operational current                | $\leq 150\text{ mA}$    |
| No-load current $I_0$                       | $\leq 15\text{ mA}$     |
| Residual current                            | $\leq 0,1\text{ mA}$    |
| Rated insulation voltage                    | $\leq 0,5\text{ kV}$    |
| Short-circuit protection                    | yes/ cyclic             |
| Voltage drop at $I_0$                       | $\leq 1,8\text{ V}$     |
| Wire breakage / Reverse polarity protection | yes/ complete           |
| Output function                             | 3-wire, NO contact, NPN |
| Protective insulation                       | □                       |
| Switching frequency                         | 1 kHz                   |

|                      |   |
|----------------------|---|
| <b>Construction</b>  | rectangular, Q8SE   |
| Dimensions           | 40 x 8 x 8 mm   |
| Housing material     | plastic, PP, yellow   |
| Tightening torque    | 0,6 Nm  |
| Connection           | cable   |
| Cable quality        | 3 mm, grey, Lif9Y-11Y, PUR, 2m<br>Suited for E-ChainSystems® acc. to manufacturers declaration H1063M |
| Cable cross section  | 3 x 0,14 mm <sup>2</sup>  |
| Vibration resistance | 55 Hz (1 mm)  |
| Shock resistance     | 30 g (11 ms)  |
| IP Rating            | IP68  |
| MTTF                 | 874 years acc. to SN 29500 (Ed. 99) 40 °C   |

|                        |            |
|------------------------|------------|
| <b>Switching state</b> | LED yellow |
|------------------------|------------|



|            |       |
|------------|-------|
| Distance D | 24 mm |
| Distance W | 12 mm |
| Distance S | 12 mm |
| Distance G | 24 mm |

|                            |      |
|----------------------------|------|
| Width of the active face B | 8 mm |
|----------------------------|------|

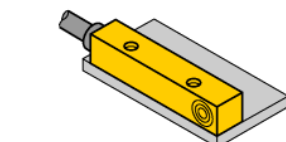
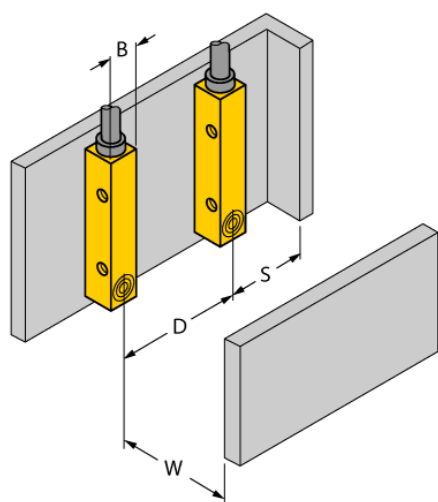


Flush mounting on 4 sides


1-side mounting:  
Sr = 3,5 mm



2-side mounting:  
Sr = 3,0 mm

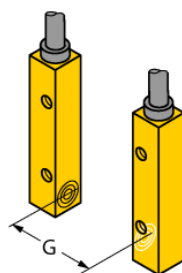

3-side mounting:  
Sr = 2,5 mm



4-side mounting:  
Sr = 2,0 mm