


SPECIFICATIONS					
NYLON OR TPU					
TPU/YELLOW					
BRASS/GOLD					
BRASS/NICKEL					
2.0 A					
125 VAC/VDC					
PVC/YELLOW					
PVC					
3x24 AWG					
-40°C TO +105°C (-40°F TO +221°F)					
MEETS NEMA 1,3,4,6P AND IEC IP67					

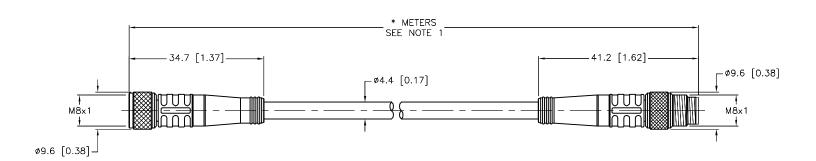

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	UPDATE MALE COUPLING NUT PER ECO	KMY	05/09/13	40191
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	RCH Inc	3000 CAMPUS DRIVE MINNEAPOLIS, MN 5544* 1-800-544-7769 (763) 553-7300 (763) 553-0708 fa turck.com	41
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR		DATE 07/07/06 SCALE 1=1.0	DESCRIPTION PKG 3M-*-	PSG 4M	
FINISH	REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	R [INCH]	IDENTIFICATION NO.	REV D	
		DO NOT SCALE	THIS DRAWING	FILE: 777008211	SHEET 1 OF	- 1