



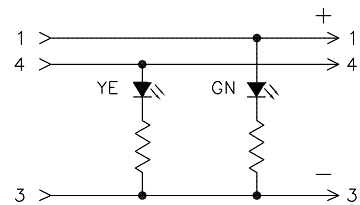
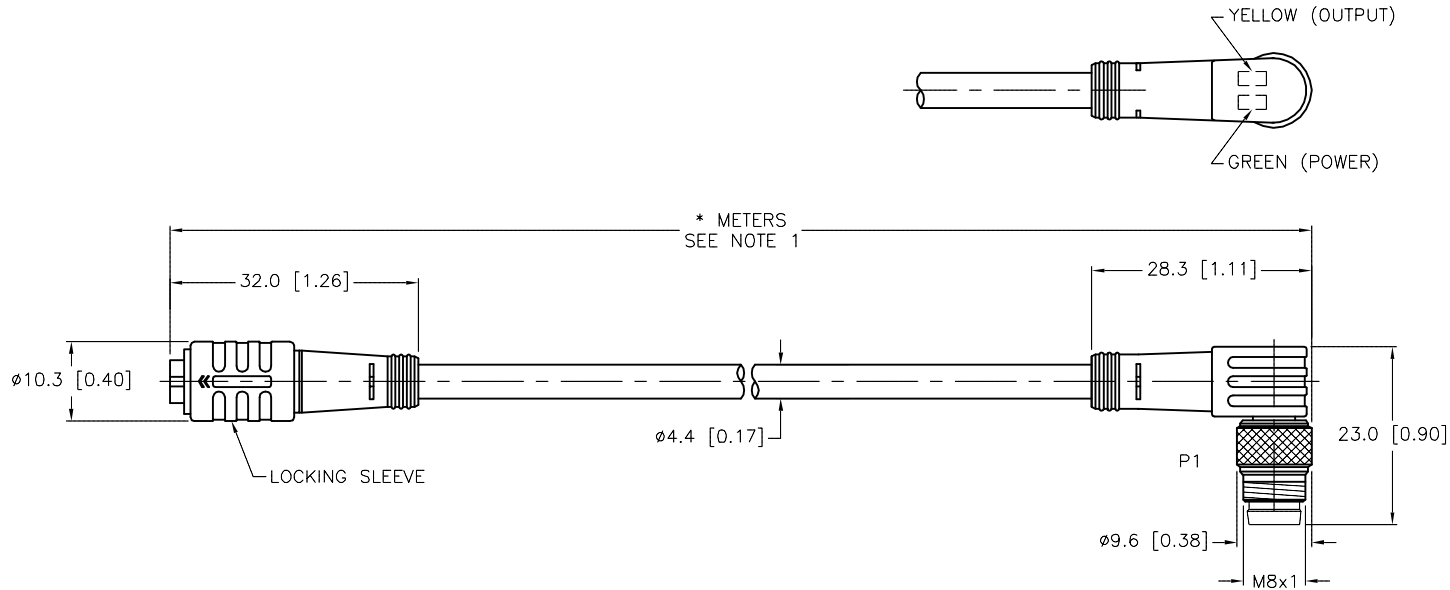


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																											
 <p>1 = BROWN 3 = BLUE 4 = BLACK</p> 	 <p>1 = BROWN 3 = BLUE 4 = BLACK</p> 	 <p>1 = VOLTAGE (+) (GREEN) 3 = COMMON (-) 4 = OUTPUT (YELLOW)</p>	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (P1)</td><td>TPU/CLEAR</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (J1)</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>LOCKING SLEEVE</td><td>POM, SNAP LOCK</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>10-30 VDC</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x24 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/CLEAR	MOLDED HEAD MATERIAL/COLOR (J1)	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	LOCKING SLEEVE	POM, SNAP LOCK	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	10-30 VDC	OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x24 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																													
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/CLEAR																													
MOLDED HEAD MATERIAL/COLOR (J1)	TPU/YELLOW																													
CONTACT MATERIAL/PLATING	BRASS/GOLD																													
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																													
LOCKING SLEEVE	POM, SNAP LOCK																													
RATED CURRENT [A]	4.0 A																													
RATED VOLTAGE [V]	10-30 VDC																													
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW																													
CONDUCTOR INSULATION MATERIAL	PVC																													
NUMBER OF CONDUCTORS [AWG]	3x24 AWG																													
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																													
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																													




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

\* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.							DRFT RDS		DATE 12/21/06	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					MILLIMETER [ INCH ]		DO NOT SCALE THIS DRAWING		PKG 3Z-*--PSW 3M-P7X2	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									REV	
									D	
D UPDATED VOLTAGE RATING					TV 07/13/15		50472		FILE: 777015047	
REV DESCRIPTION					BY		DATE		ECO NO.	
									SHEET 1 OF 1	