


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	2.0 A					
RATED VOLTAGE [V]	125 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	6×26 AWG					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4 AND IEC IP67					

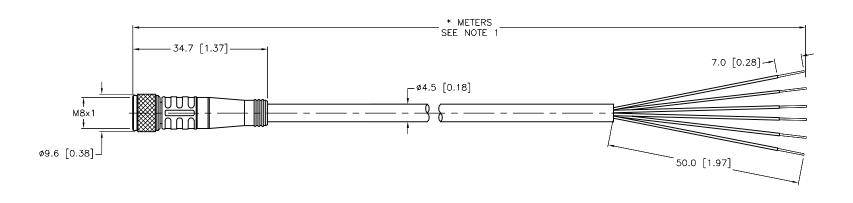

CABLE LENGTH	TOLERANCE *					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

SOURCE DRAWING - FOR REFERENCE ONLY

NOT	ES:										
1. LEN		INDICATES S.	CABLE	LENGTH	IN	METERS.	CONTACT	TURCK	ТО	ORDER	SPECIFIC

UPDATED CONTACT CARRIER MATERIAL

REV DESCRIPTION

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		High Technology Sensor and Automation Control			(763) 553-7300		55441 7769 300 708 fax
ORDER SPECIFIC	MATERIAL		DRFT JBJ		DATE 08/09/01	DESCRIPTION	PKG	CM *		
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD		SCALE 1=1.0		PNG C			
			UNIT OF MEASUREMENT							
	FINISH	REFERENCE ONLY			IDENTIFICATION NO.				REV	
		CONTACT TURCK FOR MORE	MILLIMETER [INCH]							F
11/05/15 49046	SEE SPECIFICATIONS	INFORMATION								'
DATE ECO NO.			DO NOT S	SCALE	THIS DRAWING	FILE: 777000371			SHEET	1 OF 1