


SPECIFICATIONS				
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	125 VAC/VDC			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	3×24 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

SOURCE DRAWING - FOR REFERENCE ONLY

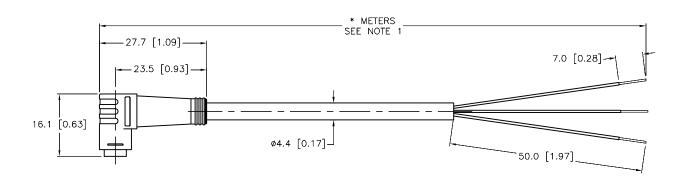

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

CBM 04/06/11 33971

ECO NO.

DATE

NOTES:

REV DESCRIPTION

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

B DRAWING PROCESSED AS PART OF ECO 33971

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		ECEK NAC Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	N 55441 7769 7300)708 fax
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	DSGN	DATE 01/15/07 SCALE 1=1.0	PKW 3-*		
FINISH	REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]		IDENTIFICATION NO. 7770083	313	REV B
1		DO NOT SCALE	THIS DRAWING	FILE: 777008313	SHEET	1 OF 1