


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/COLOR	NYLON/BLACK					
RATED CURRENT [A]	9.0 A					
RATED VOLTAGE [V]	300 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	3x18 AWG					
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					

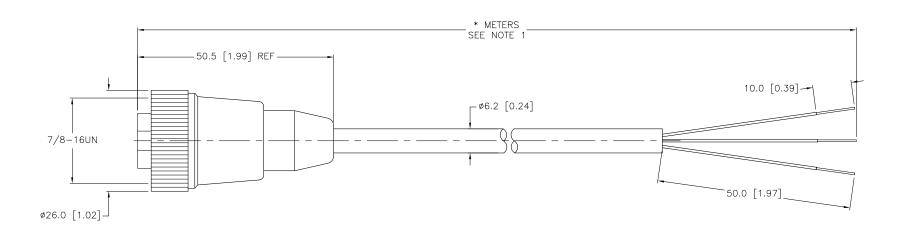

CABLE LENGTH	TOLERANCE + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
ALL LENGTHS						
STRIP LENGTH	TOLERANCE					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

REV DESCRIPTION

C UPDATE CABLE DIAMETER

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

PRDER			RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TUBECH NO. High Technology Sensors and Automation Co.			(763) 553-7300		
			SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE 02/15/07	DESCRIPTION RK 311		*1.1		
					APVD		SCALE 1=1.0		KK JII	— ·· [V]		
								IDENTIFICATION NO				DEL.
			FINISH	1				IDENTIFICATION NO				REV
				CONTACT TURCK FOR MORE	MILLIMETER [INCH]						\mathbb{C}	
ı	11/28/11	37107	SEE SPECIFICATIONS	INFORMATION								
1	DATE	ECO NO.			DC	NOT SCALE	THIS DRAWING	FILE: 77700310	9	SH	EET 1	OF 1