


SPE	CIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
OUTER JACKET MATERIAL/COLOR	PVC/BLUE	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	2×20 AWG	
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K	

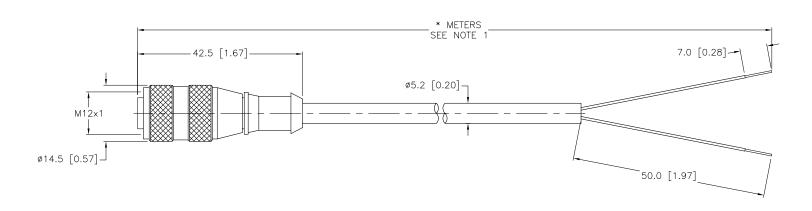

	CABLE LENGTH	TOLERANCE
	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
	STRIP LENGTH	TOLERANCE
ı	0-7mm	±0.5mm
	8-29mm	±1.0mm
	30-49mm	±2.0mm
	50-69mm	±3.0mm
	70-100mm	±4.0mm
	OVER 100mm	±5.0mm

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

Ε	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	RCK Inc	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 turck.com	I 55441 7769 300 708 fax
MATERIAL		DRFT CBM		DESCRIPTION RK 4.2	1T_*	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	1.2		
FINISH	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
TINIST	CONTACT TURCK FOR MORE	MILLIMETER [ INCH ]				l F l
SEE SPECIFICATIONS	INFORMATION					
		DO NOT SCALE	THIS DRAWING	FILE: 777000610	SHEET	1 OF 1