
FEMALE END VIEW
5 6 7 7 0 0 0 0 1 1 3 8 2 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED
Fast.

SPECIFIC	ATIONS		
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	2.0 A		
RATED VOLTAGE [V]	60 VAC/75 VDC		
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	8x24 AWG		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K		

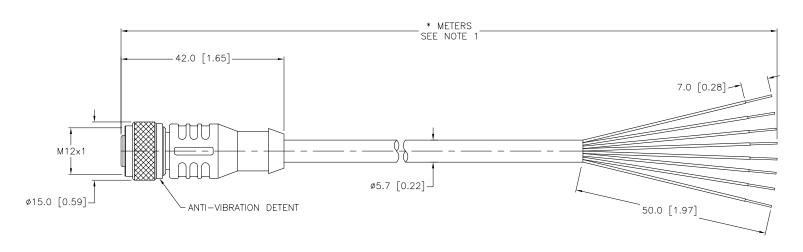

CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH TOLERANCE			
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		

## SOURCE DRAWING - FOR REFERENCE ONLY

1."\*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

NOTES:

Ε	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCH INC High Technology Sensors and Automation Controls		3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	I 55441 7769 300 708 fax
	MATERIAL		DRFT JBJ	DATE 02/23/99	DESCRIPTION	т у	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	RKC 8	-*	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	EASUREMENT	IDENTIFICATION NO.		REV
	FINISH	CONTACT TURCK	MILLIMETE	ER [ INCH ]	IDENTIFICATION NO.		F
1	SEE SPECIFICATIONS	FOR MORE INFORMATION					
). T			DO NOT SCALE	THIS DRAWING	FILE: 777000185	SHEET	1 OF 1