
FEMALE END VIEW	
2 60 4	
1 = WHITE 2 = RED 3 = GREEN 4 = ORANGE 5 = BLACK	
mini fast.	

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	10.0 A			
RATED VOLTAGE [V]	600 V			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
NUMBER OF CONDUCTORS	5×16 AWG			
CONDUCTOR INSULATION MATERIAL	PVC			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

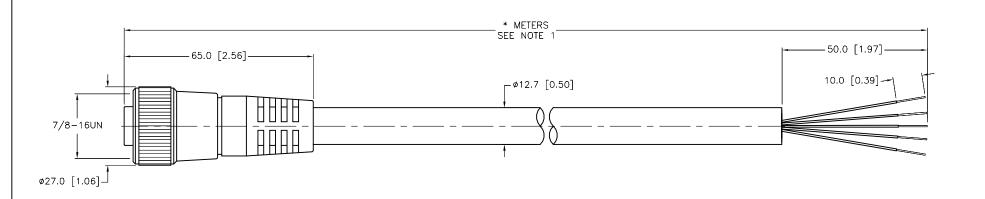

ECO NO.

CABLE LENGTH	TOLERANCE *					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNILESS OTHERWISE SPECIFIED						

## NOTES:

REV DESCRIPTION

E UPDATE PIGTAIL LENGTH

"\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

ORDER			RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION  THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.  High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
			MATERIAL		DRFT RJP	DATE 4/30/93	DESCRIPTION RKM 56-*M		
				ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.3	KVINI	20 M	
		REFERENCE		DRAWING ARE FOR REFERENCE ONLY	I UNII OF MEASUREMENT L		IDENTIFICATION NO.		
			FINISH	CONTACT TURCK	MILLIMETER [ INCH ]		IDENTIFICATION NO.		REV
T	10/29/15	52223		FOR MORE INFORMATION					E
7	DATE	ECO NO.	1		DO NOT SCALE	THIS DRAWING	FILE: 777000783	SHEET	1 OF 1

## SOURCE DRAWING - FOR REFERENCE ONLY