
MALE END VIEW
6 7 1 8 2 1 = WHITE 2 = BROWN
3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE
8 = RED **RED** **Last.**

I OREOUS	TOATIONO				
SPECIFICATIONS					
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	2.0 A				
RATED VOLTAGE [V]	60 VAC/75 VDC				
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	8x24 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K				

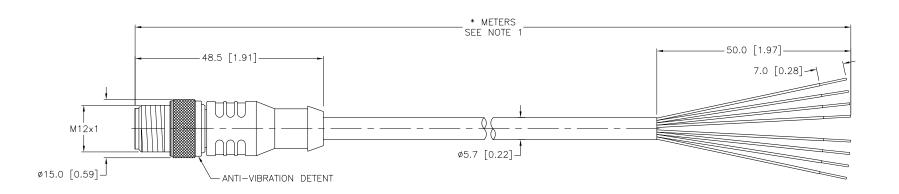

TOLERANCE
+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
TOLERANCE
±0.5mm
±1.0mm
±2.0mm
±3.0mm
±4.0mm
±5.0mm

NOTES:

1."*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

					_
Ε	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971	
REV	DESCRIPTION	BY	DATE	ECO NO.	

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	I 55441 7769 300 708 fax
MATERIAL	ALL DIMENSIONS	DSGN JBJ	DATE 02/23/99	DESCRIPTION RSC 8T	_*	
SEE SPECIFICATIONS	DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	1=1.0			
FINISH	CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]	IDENTIFICATION NO.		REV F
SEE SPECIFICATIONS	INFORMATION	DO NOT SCALE	THIS DRAWING	FILE: 777000186	SHEET	1 OF 1