
MALE END	VIEW
5 4 3 9 6 0 0 0 2 7 8	1 = ORANGE 2 = BLUE 3 = WHITE/BLACK 4 = RED/BLACK 5 = GREEN/BLACK 6 = ORANGE/BLACK 7 = RED 8 = GREEN 9 = BLACK 10 = WHITE
mini fast,	

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	7.0 A			
RATED VOLTAGE [V]	600 V			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS	10x16 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			

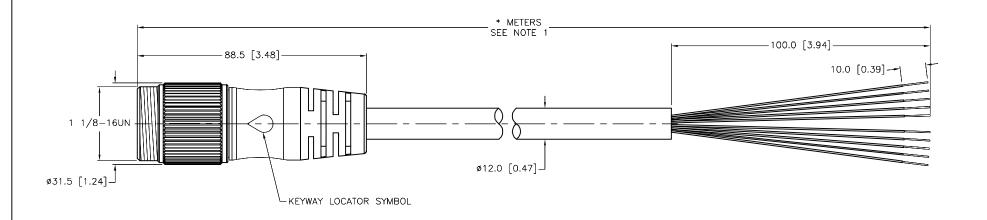

CABLE LENGTH	TOLERANCE*		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE *		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		
* UNLESS OTHERWISE SPECIFIED			

SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE			3000 CAMPUS MINNEAPOLIS, MI	
	2. 3. 4.	$\bigoplus \bigoplus$	PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		Sensors and Automation Controls	1-800-544- (763) 553-3 (763) 553-0 turck.con	7300 0708 fax
	MATERIAL		DRFT JBJ	DATE 12/02/03	DESCRIPTION RSM 10		
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.5	T WEN)0 — ·· IVI	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.		REV
	FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.		
20	SEE SPECIFICATIONS	FOR MORE INFORMATION		-11[114011]			G
Ο.			DO NOT SCALE	THIS DRAWING	FILE: 777002233	SHEET	1 OF 1

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	UPDATE OUTER JACKET MATERIAL	KMY	03/26/13	41720	
REV	DESCRIPTION	BY	DATE	ECO NO.	