


SPECIF	ICATIONS
CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	10.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTORS	4x16 AWG
CONDUCTOR INSULATION MATERIAL	PVC
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

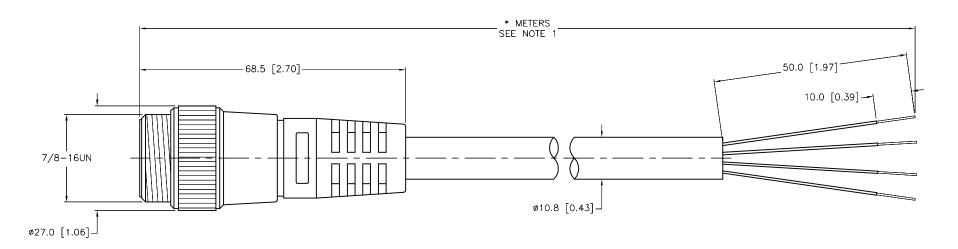

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENG - 0% (OR 0mm) OF LENGT WHICHEVER IS GREATER			
STRIP LENGTH TOLERANCE *				
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:	3. 4.
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO (LENGTHS.	ORDER SPECIFIC MATE

2.

2. 3. 1.	
MATERIAL	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY
TINISH	
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION

RELATED DOCUMENTS

3RD ANGLE PROJECTION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. DATE 01/08/01 СВМ SCALE 1=1.0

MINNEAPOLIS, MN 55441 1-800-544-7769 turck inc (763) 553-7300 High Technology Sensors and Automation Controls (763) 553-0708 fax turck.com

3000 CAMPUS DRIVE

REV

RSM 46-*M

UNIT OF MEASUREMENT MILLIMETER [INCH] IDENTIFICATION NO.

_	LIDDATE CARLE OD	NF	01/16/15	17637
┕	OPDATE CABLE OD	INI	01/10/13	4/05/
REV	DESCRIPTION	BY	DATE	ECO NO.

DO NOT SCALE THIS DRAWING

FILE: 777000152 SHEET 1 OF 1