


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	10.0 A					
RATED VOLTAGE [V]	600 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTORS	3×16 AWG					
CONDUCTOR INSULATION MATERIAL	PVC					
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					

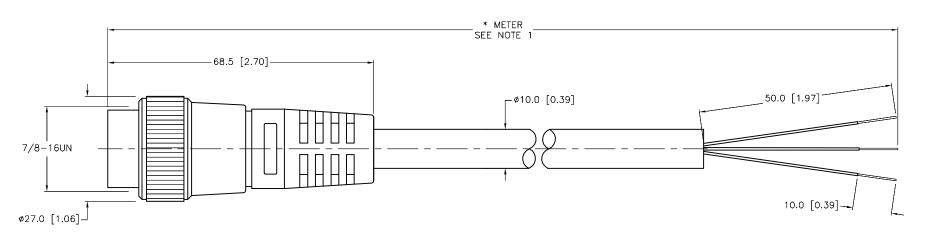

CABLE LENGTH	TOLERANCE *						
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER						
STRIP LENGTH	TOLERANCE *						
0-7mm	±0.5mm						
8-29mm	±1.0mm						
30-49mm	±2.0mm						
50-69mm	±3.0mm						
70-100mm	±4.0mm						
OVER 100mm	±5.0mm						
* UNLESS OTHERWISE SPECIFIED							

NOTES:

REV DESCRIPTION

D UPDATE CABLE OD

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

ORDER			RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		High Technology Sensors and Automation Controls MINNEAP 1-80 (763 (763				CAMPUS DRIVE OLIS, MN 55441 0-544-7769) 553-7300) 553-0708 fax urck.com	
			SEE SPECIFICATIONS FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE 03/07/07	DESCRIPTION	70 +11	` +1.1		
					APVD		SCALE 1=1.0	RYM (56-*M		
								IDENTIFICATION	NO			REV
								IDENTIFICATION	NO.			REV
				CONTACT TURCK FOR MORE	MILLIMETER [INCH]						DI	
-	02/11/15	47653	SEE SPECIFICATIONS	INFORMATION								
	DATE	ECO NO.			DC	NOT SCALE	THIS DRAWING	FILE: 777003	900		SHEET	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY