
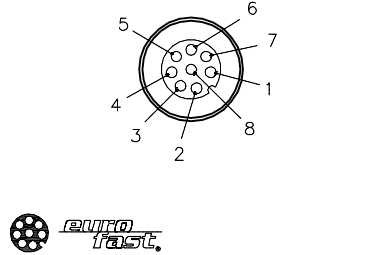
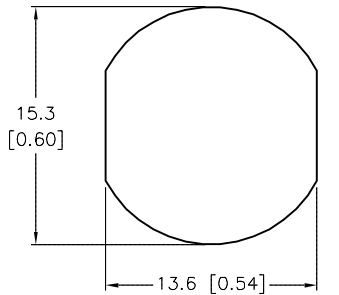
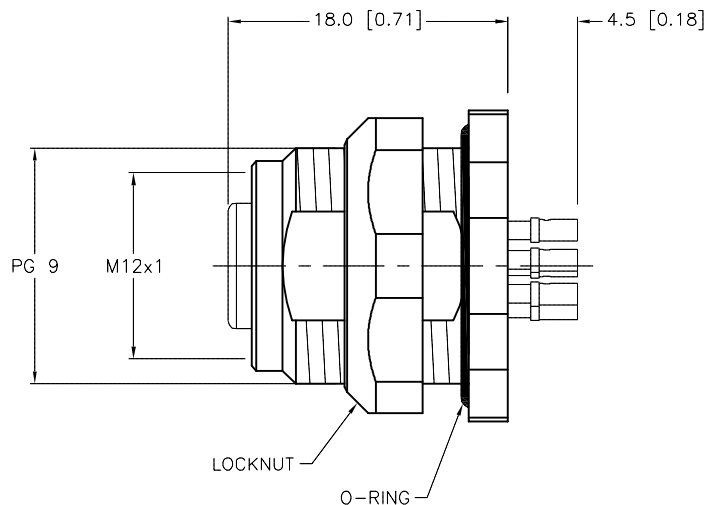
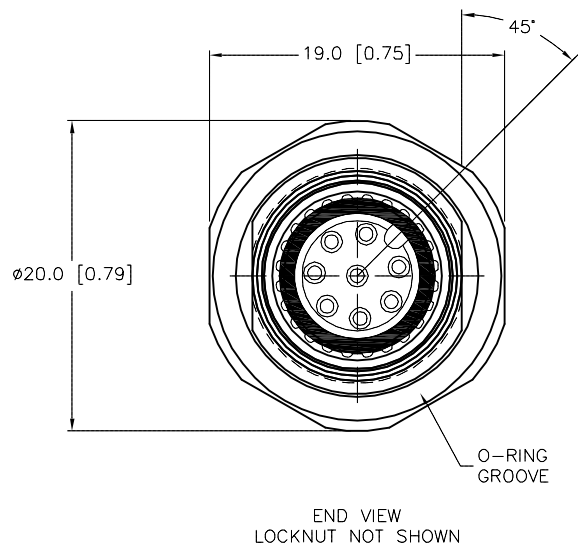


FEMALE END VIEW	TYPICAL PANEL CUTOUT	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	NYLON OR TPU
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	2.0 A
		RATED VOLTAGE [V]	60VAC/75VDC
		NUMBER OF CONDUCTORS [AWG]	SOLDER CUPS
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
		MAX. PANEL THICKNESS	3.0 [0.12]



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div> <div>TURCK INC <i>High Technology Sensors and Automation Controls</i></div>							
					1.				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		NF		DATE 02/26/15		DESCRIPTION FKFDLV 8	
					2.						APVD		L.H.		SCALE 1=.5			
					3.						4.		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
					MATERIAL		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		U2-24485		A					
					SEE SPECIFICATIONS													
					FINISH													
					SEE SPECIFICATIONS													
A	DRAWING RELEASE			NF	03/03/15													
REV	DESCRIPTION			BY	DATE	ECO NO.			DO NOT SCALE THIS DRAWING		FILE: U2-24485		SHEET 1 OF 1					