


SPECIFICATIONS			
CONTACT CARRIER MATERIAL	NYLON OR TPU		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
HOUSING MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	2.0 A		
RATED VOLTAGE [V]	60 VAC/75 VDC		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	6x24 AWG		
TEMPERATURE RATING	-40° C to $+105^{\circ}$ C (-40° F to $+221^{\circ}$ F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68		

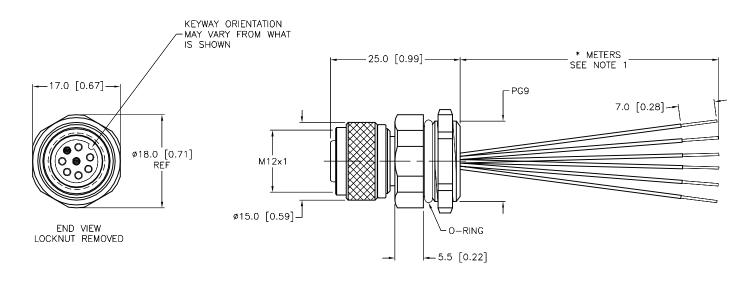

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNILESS OTHERWISE SPECIFIED				

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFC LENGTHS.

\vdash				
LA	DRAWING RELEASE	RDS	02/04/13	
REV	DESCRIPTION	BY	DATE	ECO

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	INC. USE OF THIS		RCK Inc	3000 CAMPUS DE MINNEAPOLIS, MN 5 1-800-544-77 (763) 553-730 (763) 553-070 turck.com	55441 69 00
MATERIAL			DATE 04/03/02	DESCRIPTION FKM 6	S_*	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=.8	TXIVI	,	
		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK	MILLIMETER [INCH]				ΑΙ
SEE SPECIFICATIONS	FOR MORE INFORMATION					
		DO NOT SCALE THIS DRAWING		FILE: 777001199	SHEET 1	OF 1