



1		
SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON OR TPU/YELLOW	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
OUTER JACKET MATERIAL/COLOR	PVC/BLUE	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	2×20 AWG	
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	

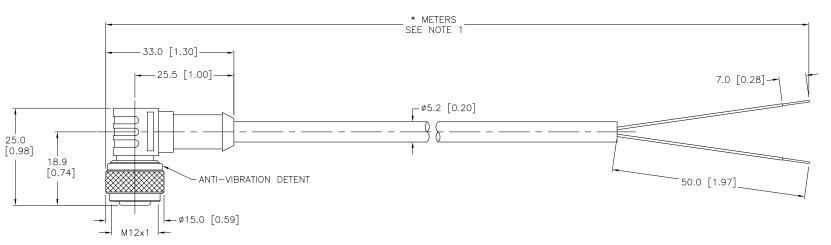



CABLE LENGTH	TOLERANCE		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE		
0-7mm	±0.5mm ±1.0mm ±2.0mm ±3.0mm		
8-29mm			
30-49mm			
50-69mm			
70-100mm			
OVER 100mm			

RELATED DOCUMENTS

2.

3.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

MATERIAL ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY FINISH CONTACT TURCK FOR MORE INFORMATION

3RD ANGLE PROJECTION

Turck inc

High Technology Sensors and Automation Controls

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

REV

3000 CAMPUS DRIVE

DATE 10/09/00 CBM SCALE 1=1.0

WK 4.21T-*

UNIT OF MEASUREMENT

IDENTIFICATION NO.

MILLIMETER [INCH] DO NOT SCALE THIS DRAWING

THIS DRAWING IS
PROPERTY OF
TURCK INC. USE OF
THIS DOCUMENT
WITHOUT WRITTEN
PERMISSION IS
PROPULIFIED

PROHIBITED.

FILE: 777000682 SHEET 1 OF 1

E	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
ΕV	DESCRIPTION	BY	DATE	ECO NO.