
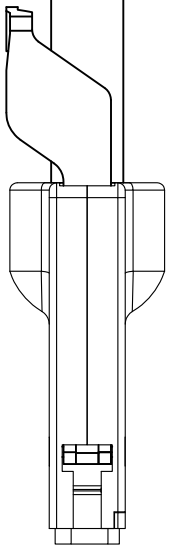
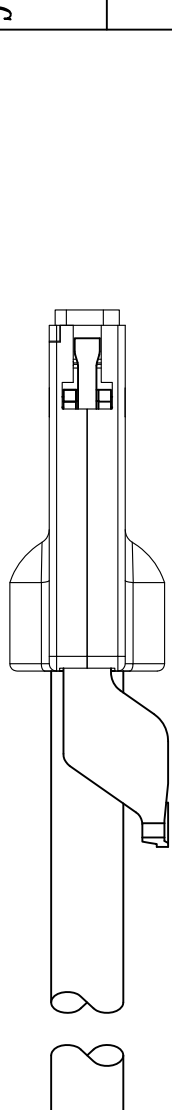


REV.	REMARK	DATE	SIGN.
------	--------	------	-------

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

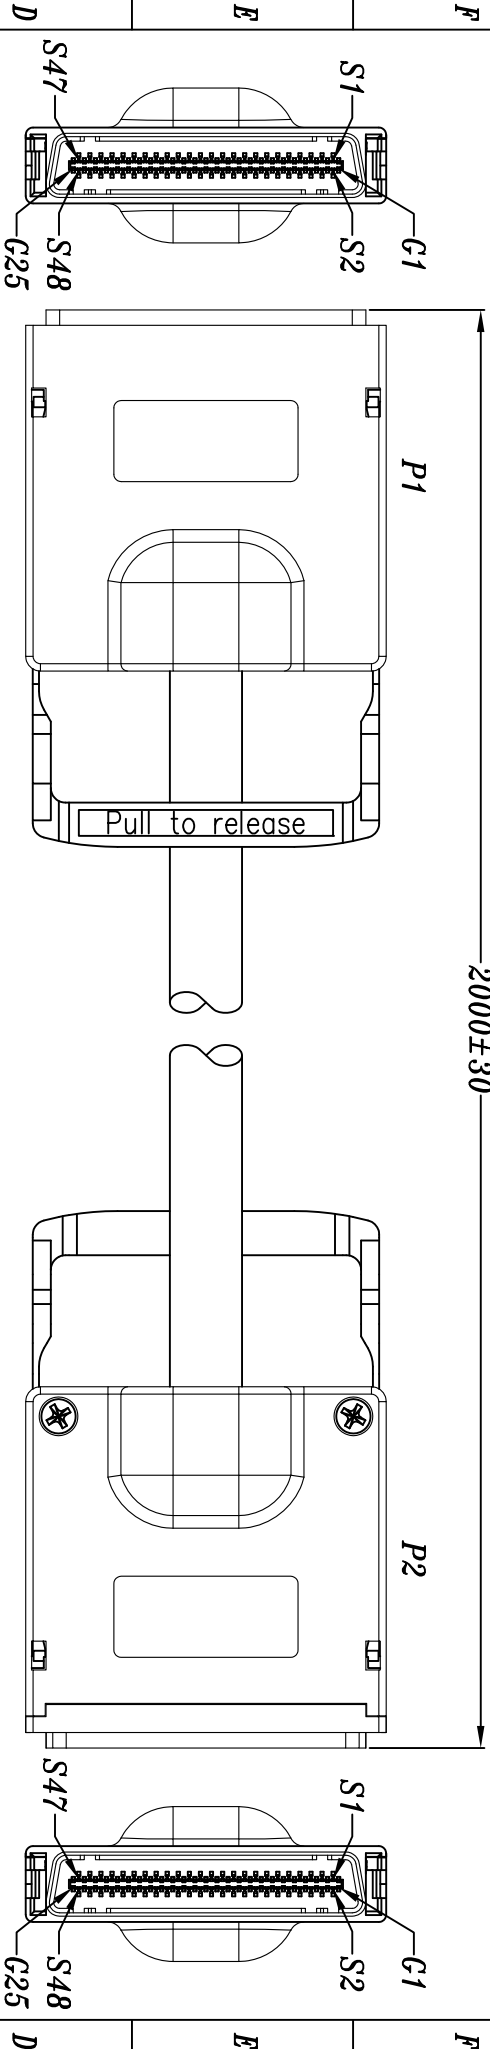

1. PAIR COMPONENT: (AMPHENOL 28AWG)
 CONDUCTOR: 30AWG SOLID SILVER PLATED.
 DRAIN WIRE: 30AWG SOLID TINNED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 20% OVERLAP
 2. FINAL ASSEMBLY:

CORE: 24 PAIRS (#1-24) CABLED TOGETHER.
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 20% OVERLAP.
 OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
 DIAMETER: 9.8mm NOMINAL, COLOR: BLACK
 DIFFERENTIAL IMPEDANCE: 100±5 ohms @TDR
 MUTUAL CAPACITANCE: 43pF/M NOMINAL.
 TIME DELAY: 4.35ns/M.

3. CONNECTOR & HOOD:
 P1 & P2 :12X EJECTOR TYPE CONNECTOR:
 (1)HOUSING- ZINC DIE CAST
 (2)CONTACTS- 30u" INCHES GOLD PLATING

4. For DDR use

DESC.	12X/12X CABLE EJECTORS	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	DATE	05/10/07	DWG NO.	DWG\B\1534
P/N	C6262-2ME-DDR CUSTOMER P/N												

DataStorageCables.com

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---