REV.	REMARK	DATE	SIGN.

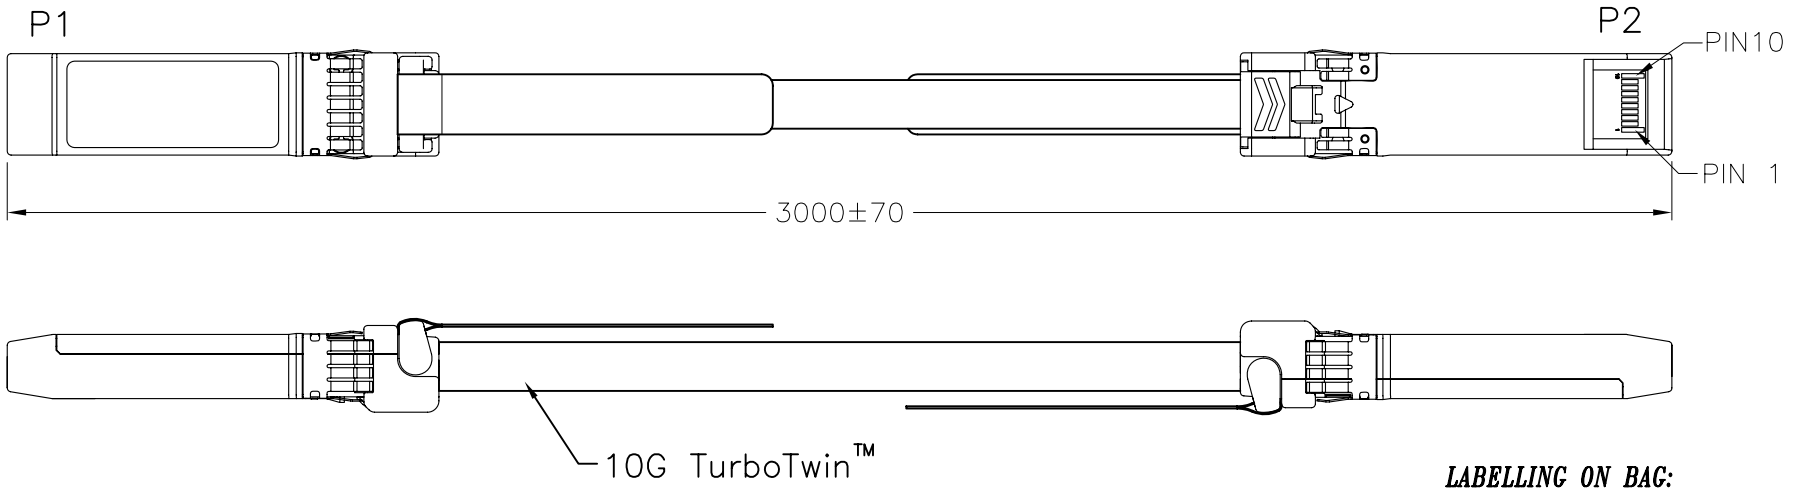

LABELLING ON BAG:



1.CABLE:
- CONDUCTOR: 24AWG SOLID SILVER PLATED COPPER.
- INSULATION: FOAM POLYOLEFIN.
- PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
- PAIR DRAIN WIRE: 26AWG SOLID SILVER PLATED COPPER.
- PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR–YELLOW.
- INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.
- OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
- DIAMETER: 6.86mm NOMINAL. COLOR: BLACK.
- PRINT LEGEND: "TYPE CL2 75°C 24AWG (UL) MADISON CABLE CSA AWM II A/B 75C 30V FT4 TurboTwin™ 10G RoHS COMPLIANT"
- DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
- UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TurboTwin™

2.HOOD: ZINC DIE CASTING, NICKEL PLATING.
3.LATCH: PC RESIN UL94V, COLOR IN BLACK.
4.P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS.
5.SERIAL ID IC: THE MATE COMPANY, P/O# & P/N#...

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P2 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	

DataStorageCables.com	DESC.	SFP+ 3M CABLE 24AWG PASSIVE		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT mm
	P/N	C9999-3M-P	CUSTOMER P/N			SHIU		DATE	04/23/'09	DWG NO: DWG\RC\3084

1 2 3 4 5 6 7 8 9