


CUSTOMER DRAWING


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
Alt	Initial Release for Manufacture	Dec.12.07	Jerry Duh

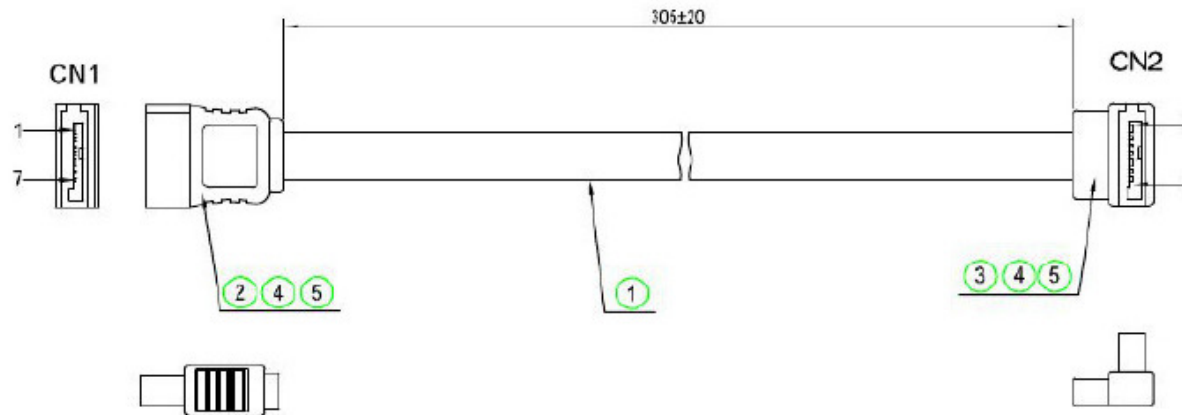

ELECTRICAL TEST :

1. OPEN/SHORT:100%.
2. INSULATION RESISTANCE: 5 Mohm(MIN).
3. CONTACT RESISTANCE: 1 ohm (MAX).
4. HI-POT:DC 300V/10ms.

PIN ASSIGNMENT

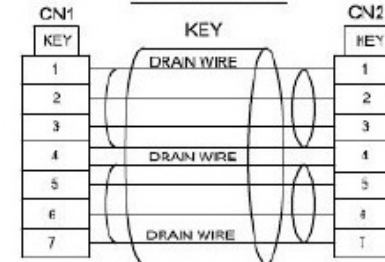

*	4-18-0004-413020	CARTON 46"31"20cm	1/500	PCS
*	4-14-0022-342851	PE BAG 34"28"0.08mm	1/500	PCS
*	4-14-0003-041251	PE BAG 8"12"0.06mm	1/50	PCS
*	4-14-0002-010851	PE BAG 3"8"0.06mm	1	PCS
*	4-18-0005-140010	TIE WHITE	65	mm
5	3-02-0001-532151	PE 5321	3	G
4	3-01-0001-035001	PVC 50P BLACK	4.5	G
3	2-51-A902-031501	SATA7P/F 90° CONTACT GOLD PLATED=15U",HOUSING:PBT BLACK	1	PCS
2	2-51-A903-031501	SATA7P/F 180° CONTACT GOLD PLATED=15U",HOUSING:PBT BLACK	1	PCS
1	1-51-0001-210203	(30#*2F+AL+2D)*2C OD:5.8*1.85mm RED UL21149 HALF MATT PVC	305	mm
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

APPROVALS		DATE	DataStorageCables.com	
DESIGNED	Churhus Yan	Dec.12.07	SATA CABLE 12IN RIGHT ANGLE DOWN TO STRAIGHT LOW PROFILE CONN	
CHECKED				
DESIGNED	Churhus Yan	Dec.12.07	SIZE	SCALE
			C	30K - 30K
			DRAWING NO.	REV.
			SATA-12IN-RL	A0
			DWG.	SHEET 1 OF 1