


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

RoHS

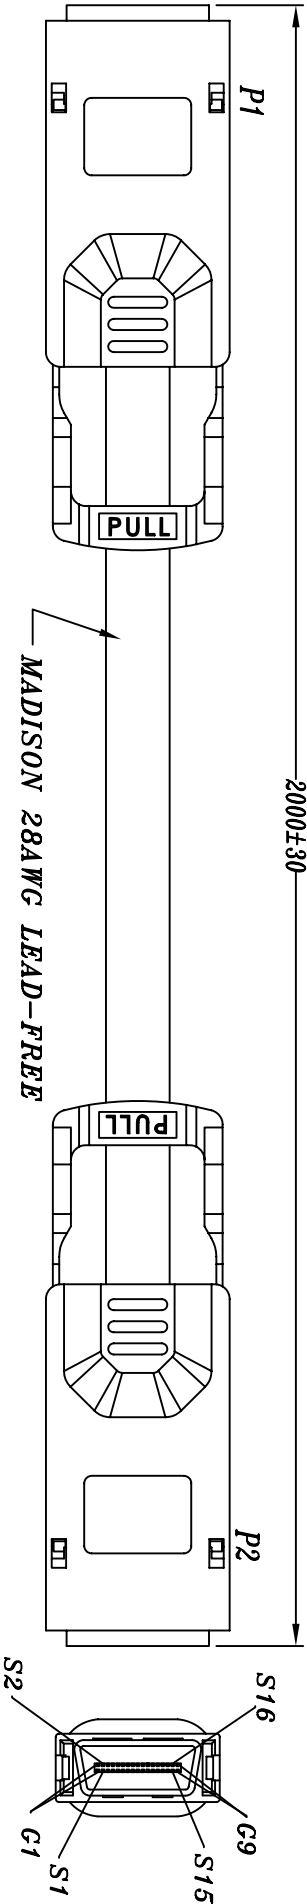


MATERIAL RoHS COMPLIANT:

1. CABLE:

CONDUCTOR: 28AWG SOLID SILVER PLATED COPPER, 0.320mm DIAMETER.
 INSULATION: 0.3048mm OF FOAM POLYOLEFIN, 0.939mm DIAMETER, COLOR-NATURAL.
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
 PAIR DRAIN WIRE: 30AWG SOLID SILVER PLATED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING IN, 25% OVERLAP.
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.
 OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
 DIAMETER: 7.874mm NOMINAL.
 PRINT LEGEND: "MADISON CABLE CORP. TYPE CL2 75°C 28AWG (UL) Turbo™ LEAD-FREE"
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE.

2.SAS EJECTOR TYPE CONNECTOR:

- (1).MAIN BODY:HIGH TEMPERATURE LCP RESIN UL94V-0
 - (2).SINGAL PIN & GROUND PIN: PHOSPHER BRONZE/30u" GOLD OVER NICKEL.
 - (3).P.C.BOARD: FR4, 4 LAYER
 - (4).EJECTON LATCH: STAINLESS STEEL.
 - (5).BALCK SHBL: ZINC DIE CASTING/NICKEL PLATED.
3. FOR 10G ETHERNET USE

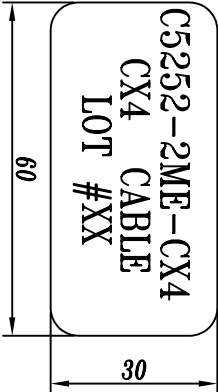

LABELLING ON BAG:

WIRING DIAGRAM			
P1	SIGNAL	PIN NO.	P2
PIN NO.	SIGNAL	PIN NO.	SIGNAL
G1 - G9	GROUND	G1 - G9	GROUND
S1	RX0+	S16	TX0+
S2	RX0-	S15	TX0-
S3	RX1+	S14	TX1+
S4	RX1-	S13	TX1-
S5	RX2+	S12	TX2+
S6	RX2-	S11	TX2-
S7	RX3+	S10	TX3+
S8	RX3-	S9	TX3-
S9	TX3-	S8	RX3-
S10	TX3+	S7	RX3+
S11	TX2-	S6	RX2-
S12	TX2+	S5	RX2+
S13	TX1-	S4	RX1-
S14	TX1+	S3	RX1+
S15	TX0-	S2	RX0-
S16	TX0+	S1	RX0+
CONNECTOR SHELL		CONNECTOR SHELL	

DataStorageCables.com										
DESC.	CX4/CX4 CABLE ASSEMBLY EJECTOR TYPE				APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1
P/N	C5252-2ME-CX4	CUSTOMER P/N					Ku.		DATE 11/22/06	DWG NO: DMC\RC\2154
									UNIT mm	

DataStorageCables.com

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---