

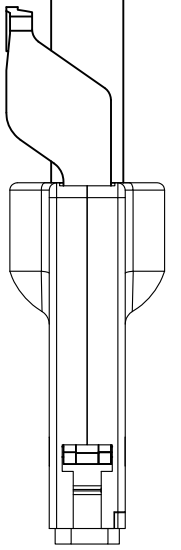
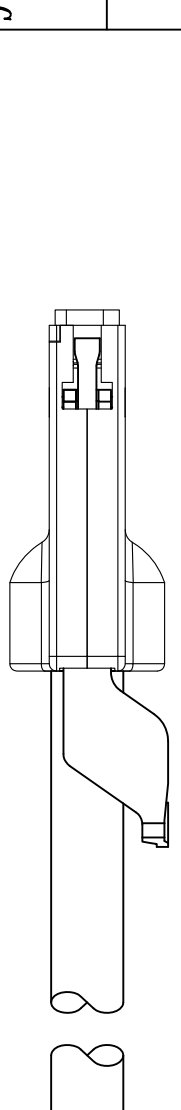


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

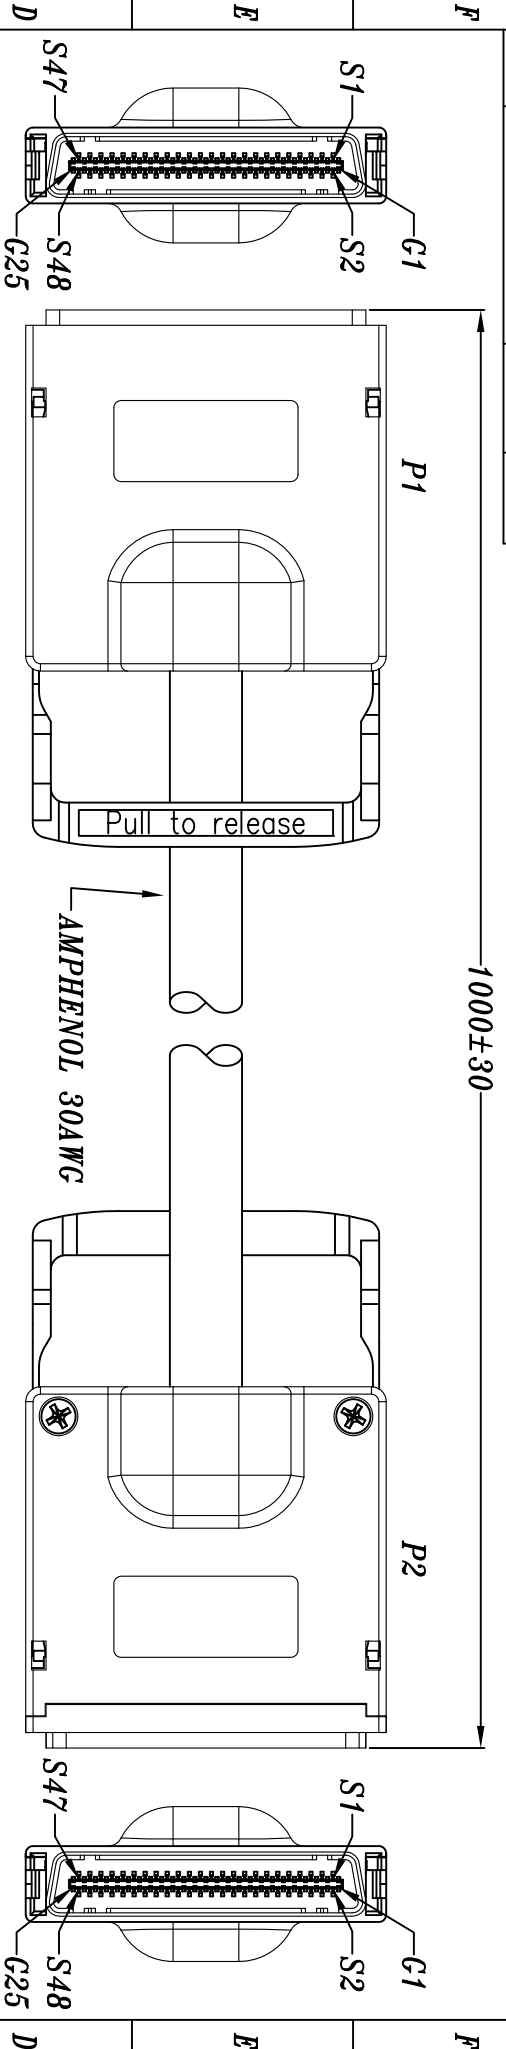

LABELLING ON BAG:

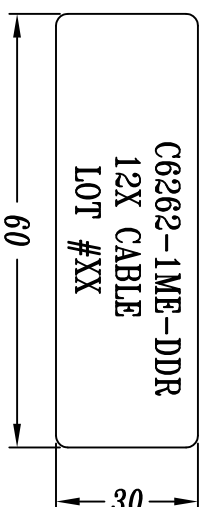

1.PAIR COMPONENT: (AMPHENOL 30AWG)
CONDUCTOR: 28AWG SOLID SILVER PLATED.
DRAIN WIRE: 30AWG SOLID TINNED COPPER.
PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 20% OVERLAP
2.FINAL ASSEMBLY:
CORE: 24 PAIRS (#1-24) CABLED TOGETHER.
INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 20% OVERLAP.
OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
DIAMETER: 11.3mm NOMINAL, COLOR: BLACK
DIFFERENTIAL IMPEDANCE: 100±5 ohms @TDR
CAPACITANCE: 42pF/M NOMINAL.
PROP DELAY: 4.25ns/M.

3. CONNECTOR & HOOD:
P1 & P2 :12X EJECTOR TYPE CONNECTOR:
(1)HOUSING- ZINC DIE CAST
(2)CONTACTS- 30u" INCHES GOLD PLATING
*4.CUSTOM PINOUT

DataStorageCables.com

DESC.	12X/12X CABLE PULL LATCH(STANDARD PINOUT)	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
P/N	c6262-1ME-DDR	CUSTOMER P/N		SHIU		DATE	10/31/07	DWG NO.	DWG	RC\2594
1	2	3	4	5	6	7	8	9		