


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

RoHS

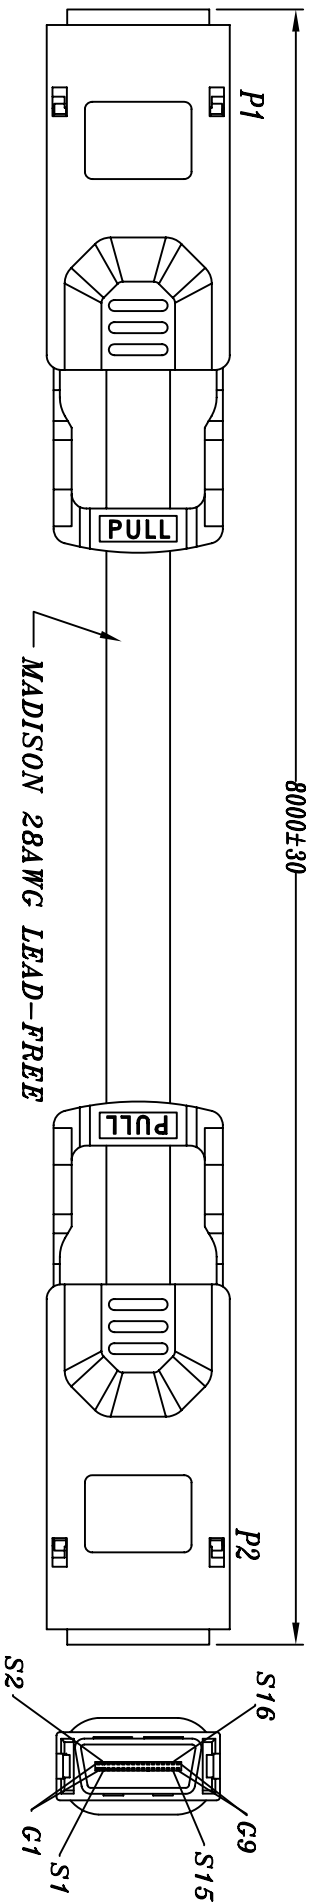


MATERIAL ROHS COMPLIANT:

1. CABLE:

CONDUCTOR: 28AWG SOLID SILVER PLATED COPPER, 0.320mm DIAMETER.
INSULATION:0.3048mm OF FOAM POLYOLEFIN, 0.939mm DIAMETER, COLOR-NATURAL.
PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
PAIR DRAIN WIRE: 30AWG SOLID SILVER PLATED COPPER.
PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP.
INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.
OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
DIAMETER: 7.874mm NOMINAL.
PRINT LEGEND: "MADISON CABLE CORP TYPE CL2 75°C 28AWG (UL) TurboTwin™ LEAD-FREE"
DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE.

2.SAS 4X EJECTOR TYPE CONNECTOR:

- MAIN BODY:HIGH TEMPERATURE LCP RESIN UL94V-0
- SINGAL PIN & GROUND PIN: PHOSPHOR BRONZE/30u" GOLD OVER NICKEL.
- P.C.BOARD: FR4, 4 LAYER
- EJECTON LATCH: STAINLESS STEEL.
- BALCK SHBL: ZINC DIE CASTING/NICKEL PLATED.
- FOR 10G ETHERNET USE

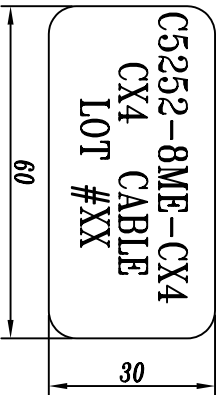

LABELLING ON BAG:

WIRING DIAGRAM					
P1	SIGNAL	PIN NO.	P2	SIGNAL	
C1 - C9	GROUND	C1 - C9	GROUND		
S1	RX0+	S16	TX0+		
S2	RX0-	S15	TX0-		
S3	RX1+	S14	TX1+		
S4	RX1-	S13	TX1-		
S5	RX2+	S12	TX2+		
S6	RX2-	S11	TX2-		
S7	RX3+	S10	TX3+		
S8	RX3-	S9	TX3-		
S9	TX3+	S8	RX3+		
S10	TX2+	S6	RX2+		
S11	TX2-	S5	RX2-		
S12	TX1+	S4	RX1+		
S13	TX1-	S3	RX1-		
S14	TX0+	S2	RX0+		
S15	TX0-	S1	RX0-		
S16	TX0+				
CONNECTOR SHELL		CONNECTOR SHELL			

DESC.	CX4/CX4 CABLE ASSEMBLY EJECTOR TYPE APPROVED CHECKED DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	DATE	11/22/06	DWG NO.	DWG RC	2154
P/N	C5252-8ME-CX4 CUSTOMER P/N										

DataStorageCables.com

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---