IBD 4500-30



Ice Beverage Dispenser

The IBD is Lancer's #1 selling self-serve dispenser. Hard plumbed syrup and water lines deliver excellent icy cold drinks. Versatile valve configurations and a portion control option allow for easy beverage cost monitoring. Topped with a compelling wraparound display, the IBD is a favorite of our customers.



8 valves



10 valves


IBD 4500 30" Ice Beverage Dispenser

- Industry standard platforms in 30" width - 8 or 10 valve, lever or push button dispensing versatility
- Illuminated interchangeable front graphics, standard fluorescent 15 watt light bulb
- High capacity ice storage bin
- Visual low ice indicator lights up to alert the need for ice in the dispenser bin
- High capacity drip tray to handle customer ice and beverage overfill helps avoid safety hazards and drink station cleanup from spills
- Unique hex drive ice agitation and dispense drive system for trouble free operation and long service life
- Multiple valve configurations available for self-serve and portion control operation to control beverage costs
- All stainless steel construction; exterior and interior
- Fully insulated storage bin and drip tray controls condensation and helps avoid moisture related safety hazards
- Plumbing access front and rear for installation flexibility
- **Dispensing Solutions that** *Pour More*

LANCER

lancercorp.com

IBD 4500-30

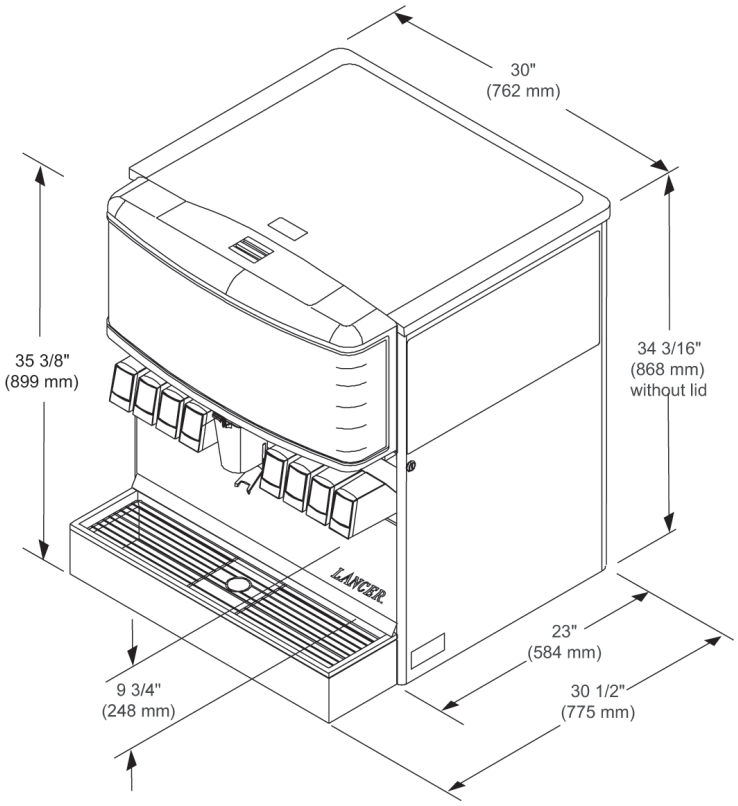

SPECIFICATIONS

DIMENSIONS
Height: 35.375" (899 mm)
Width: 30" (762 mm)
Depth: 30.5" (775 mm)

SPACE REQUIRED
Width: 32" (812.8 mm)
Deep: 31.5" (800.1 mm)
Height: *Allow sufficient clearance for manually filling with ice or refer to ice maker recommendation for top clearance.*

ELECTRICAL
115V/60Hz
230V/50Hz

WEIGHT
With Ice: 525 lbs (238 kg)
Shipping: 305 lbs (138 kg)

ICE
Capacity: 250 lbs (113 kg)
Dispensable: 175 lbs (79 kg)

FITTINGS
Soda Inlets: 3/8" male barb
Syrup Inlets: 3/8" male barb

VALVES
LEV® other valves available upon request

FLEX MANIFOLD CONFIGURATION
8 Valve: 3-1-1-3
10 Valve: 3-1-2-1-3

KEY LOCK SWITCH
(Note: specifications are the same for 8 and 10 valve)

DRAW PERFORMANCE

Number of Drinks Below 40°F


75°F (24°C) Ambient Temperature
12 oz/11 drinks per minute
24 oz/5 drinks per minute

90°F (32°C) Ambient Temperature
12 oz/8.5 drinks per minute
24 oz/3.5 drinks per minute

(Units can supply drinks under 40°F at rated draw performance continuously as long as ice is kept on cold plate. Draw performance for 8 valve.)

ICE MAKER COMPATIBILITY

- Accepts 30" and 22" wide ice makers (adapters may be required)
- Manual front load when ice maker not installed
- Variable automatic agitation timer
- Pellet capable dispense is available (specifications on request)

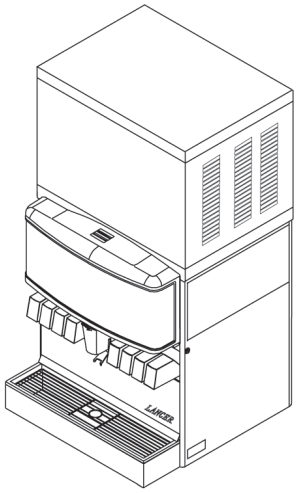

Customer Service:
Should you require more information about our products, please do not hesitate to contact our customer service desk at **custserv@lancercorp.com.**

Warranty:
For warranty specifics by product, contact your Lancer Sales Representative.
Equipment design and/or specifications are subject to change without notice.

Lancer Corp. 6655 Lancer Boulevard · San Antonio, TX 78219
210-310-7000 · 1-800-729-1500 · Fax: 210-310-7250

Model 4500

Pour More

LANCER

lancercorp.com