


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

WIRING DIAGRAM

HIGH SPEED SIGNAL			
P0(Mini SAS HD 4x Plug)		SATA Cable Receptacle(Target)	
PIN	SIGNAL	PIN	SIGNAL
D4	TX0+	2	RX+
D5	TX0-	3	RX-
B5	RX0-	5	TX-
B4	RX0+	6	TX+
GND Group		1,4,7	GND
C4	TX1+	2	RX+
C5	TX1-	3	RX-
A5	RX1-	5	TX-
A4	RX1+	6	TX+
GND Group		1,4,7	GND
D7	TX2+	2	RX+
D8	TX2-	3	RX-
B8	RX2-	5	TX-
B7	RX2+	6	TX+
GND Group		1,4,7	GND
C7	TX3+	2	RX+
C8	TX3-	3	RX-
A8	RX3-	5	TX-
A7	RX3+	6	TX+
GND GROUP		1,4,7	GND

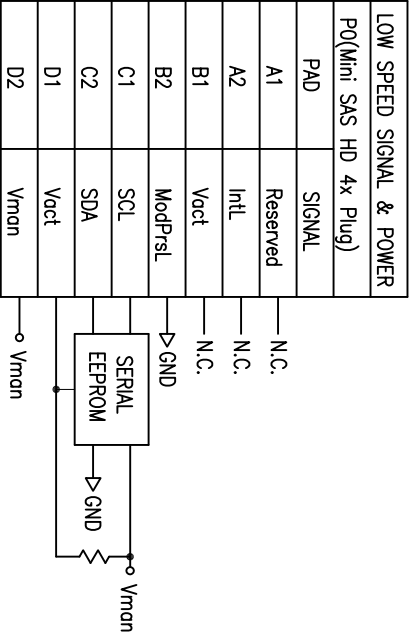

GND GROUP:
A3,A6,A9,B3,B6,B9,
C3,C6,C9,D3,D6,D9.

DESC.	Mini SAS HD 4x/4*SATA CABLE ASS'Y			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N	C5547-xM	CUSTOMER P/N				Sino	*	DATE	11/21/12	DWG NO:	DWG\PC\5850	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---