



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

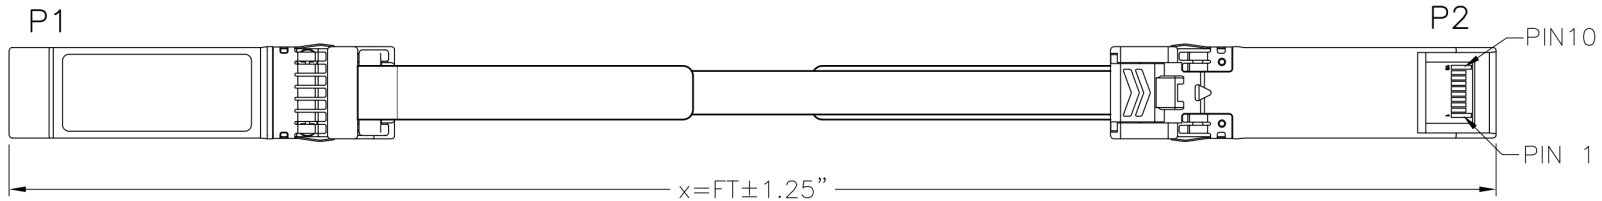

10G TurboTwin™

LABELLING ON BAG:



1.CABLE:
 CONDUCTOR: 30AWG SOLID SILVER PLATED COPPER.
 INSULATION: FOAM POLYOLEFIN.
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
 PAIR DRAIN WIRE: 30AWG SOLID SILVER PLATED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING OUT, 25% OVERLAP.
 OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
 DIAMETER: 0.175" NOMINAL. COLOR: BLACK.

PRINT LEGEND: "TYPE CL2 75°C 30AWG (UL) MADISON CABLE RoHS COMPLIANT
 CSA TYPE 75°C 30V FT4 TurboTwin™ 10G 101-8873 NON-HALOGEN
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL
 ELECTRICAL CODE. TurboTwin™

2.HOOD: ZINC DIE CASTING, NICKEL PLATING.
 3.LATCH: PC RESIN UL94V, COLOR IN BLACK.
 4.P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS.
 5.SERIAL ID IC: THE MATE COMPANY, P/N#...

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P2 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	

TMC-The Mate Co.	DESC.	SFP+ 30AWG LSZH CABLE	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
	P/N	C9999-xFT-30LS	CUSTOMER P/N				DATE	10/22/11	DWG NO:		

1 2 3 4 5 6 7 8 9