


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

WIRING DIAGRAM

HIGH SPEED SIGNAL				
P0(Mini SAS HD 4x Plug)		SATA Cable Receptacle(Target)		
PIN	SIGNAL		PIN	SIGNAL
D4	TX0+		2	RX+
D5	TX0-		3	RX-
B5	RX0-		5	TX-
B4	RX0+		6	TX+
GND Group	GND		1,4,7	GND
C4	TX1+		2	RX+
C5	TX1-		3	RX-
A5	RX1-		5	TX-
A4	RX1+		6	TX+
GND Group	GND		1,4,7	GND
D7	TX2+		2	RX+
D8	TX2-		3	RX-
B8	RX2-		5	TX-
B7	RX2+		6	TX+
GND Group	GND		1,4,7	GND
C7	TX3+		2	RX+
C8	TX3-		3	RX-
A8	RX3-		5	TX-
A7	RX3+		6	TX+
GND GROUP	GND		1,4,7	GND

GND GROUP:
A3,A6,A9,B3,B6,B9,
C3,C6,C9,D3,D6,D9.

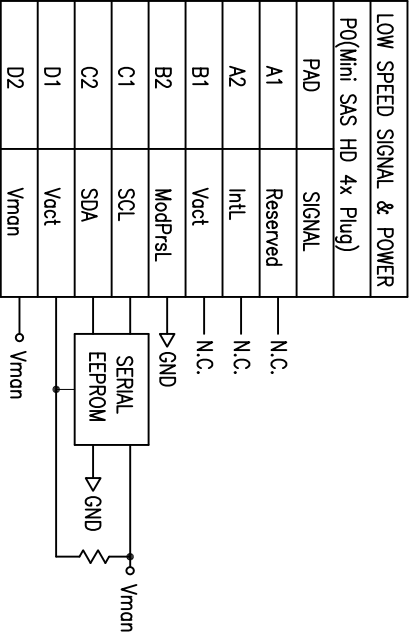

DESC.		Mini SAS HD 4x/4*SATA CABLE ASS'Y			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N		C5547-xM	CUSTOMER P/N				Sino	*	DATE	11/21/12	DWG NO:	DWG\RC\5850	

DataStorageCables.com

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---