



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

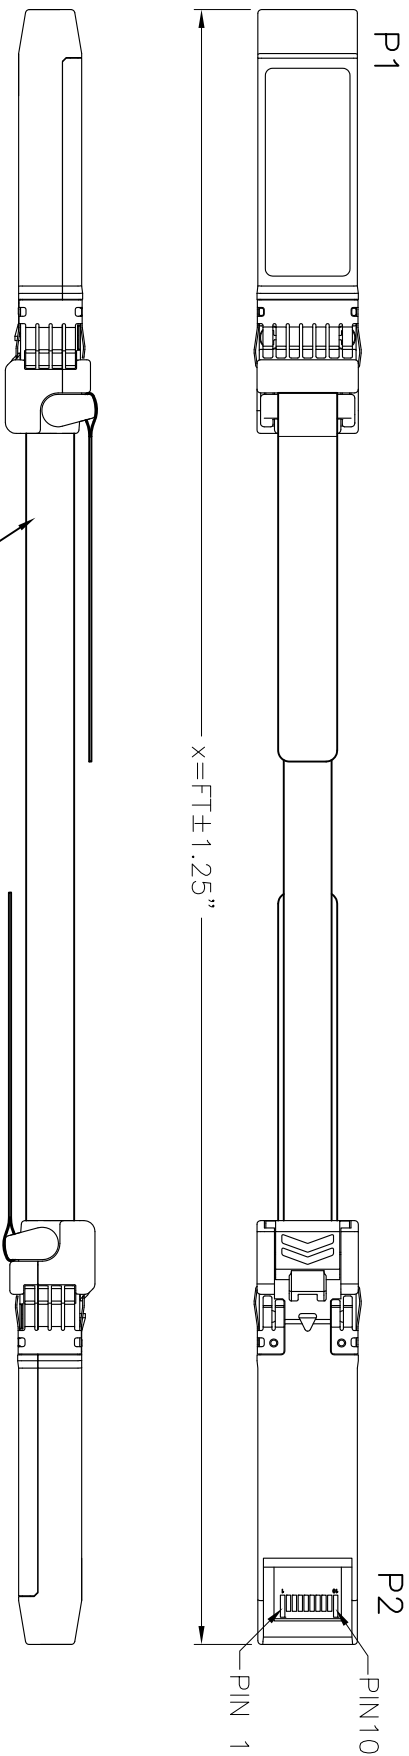

LABELLING ON BAG:



1. CABLE:  
 CONDUCTOR: 30AWG SOLID SILVER PLATED COPPER.  
 INSULATION: FOAM POLYOLEFIN.  
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.  
 PAIR DRAIN WIRE: 30AWG SOLID SILVER PLATED COPPER.  
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.  
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING OUT, 25% OVERLAP.  
 OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.  
 DIAMETER: 0.175" NOMINAL. COLOR: BLACK.

PRINT LEGEND: "TYPE CL2 75°C 30AWG (UL) MADISON CABLE ROHS COMPLIANT  
 CSA TYPE 75°C 30V FT4 TurboTwin™ 10G 101-8873 NON-HALOGEN

DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR  
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TurboTwin™

2. HOOD: ZINC DIE CASTING, NICKEL PLATING.  
 3. LATCH: PC RESIN UL94V, COLOR IN BLACK.  
 4. P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS.

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P2 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	

DataStorageCables.com

DESC.	SFP+ 30AWG LSZH CABLE	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	UNIT	mm
P/N	C9999-xFT-30LS CUSTOMER P/N			SHIU		DATE	10/22/11	DWG NO.		DWG RC	3080