


1	2	3	4	5	6	7	8	9
Rev.	Remark	Date	Sign.					



ROHS

3000+ / -50

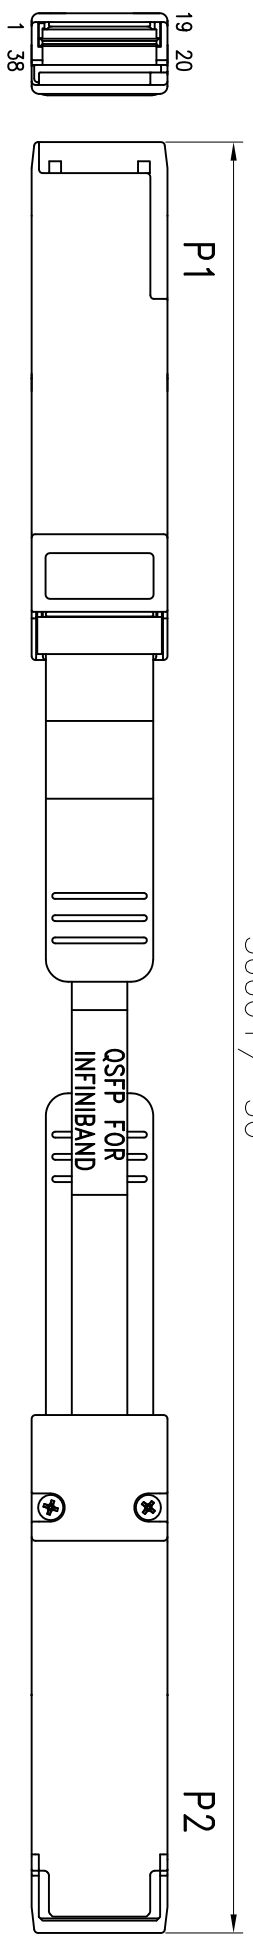

Material RoHS Compliant:

1. Cable:
 - Conductor: 28 AWG Solid Silver Plated Copper, 0.320 mm Diameter.
 - Insulation: 0.3048 mm of Foam Polyolefin, 0.939 mm Diameter, Color-Natural.
 - Pair: 2 Singles Laid Flat and Parallel.
 - Pair Drain Wire: 30 AWG Solid Silver Plated Copper.
 - Pair Shield: Aluminum/Polyester Tape. Aluminum Side Facing In, 25% Overlap.
 - Inner Shield: Aluminum/Polyester Tape, Aluminum Side Facing Out, 25% Overlap.
 - Outer Shield: 38 AWG Tin Plated Copper Braid, 85% Coverage.
 - Diameter: 7.874 mm Nominal.
 - Print Legend: "(UL) TYPE CL2 75°C 28 AWG MADISON CABLE C(UL)TYPE CMG 75°C TurboTwin™ RoHS COMPLIANT"
 - Differential Impedance: 100±5 Ohms @ TDR
 - UL Listing: Type CL2 as Specified in Article 725 of the National Electrical Code.
2. Connector:
 - P1,P2: 4x-Pluggable-QSFP(SFF-8436)
 - (1) PCB: FR4, 4 Layers,(SPCB-040068A, AC Coupling)
 - (2) Latch: Stainless Steel with Pull Tab.
 - (3) Backshell: Zinc Die Casting Hood/Nickel Plating.
3. For INFINIBAND DDR
4. Two-Wire Serial Memory: Atmel AT24C02B EEPROM(256 Bytes), Digital monitoring & control function and memory page not supported.

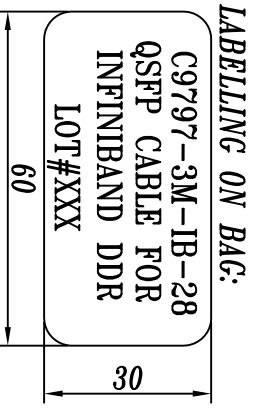

DataStorageCables.com

Desc.	QSF Passive Cable Assembly	Approved	Checked	Designed	Tolerance	Scale	Unit	mm
P/N	C9797-3M-IB-28			LAI	*	Date	DWG NO:	DWG\B\2621
1	2	3	4	5	6	7	8	9

