
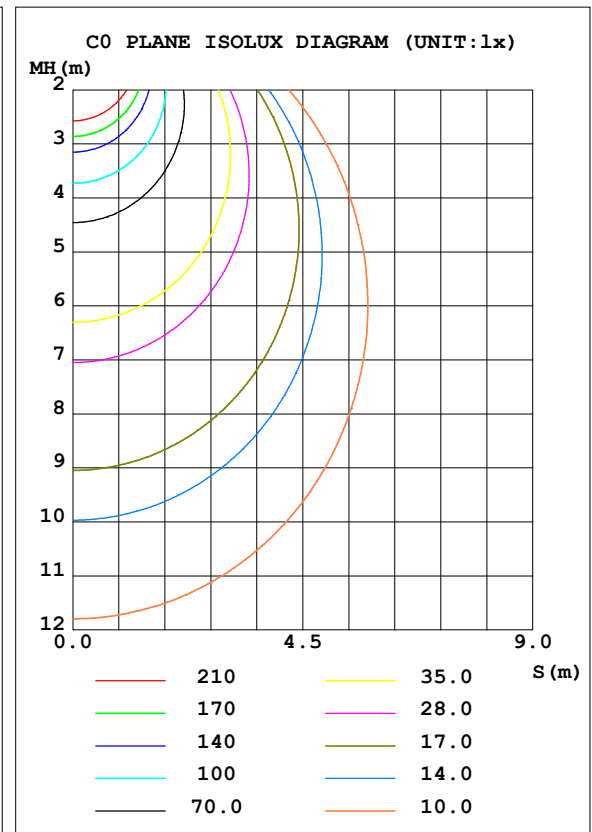


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.24 lm/W			
MODEL	VFPR22CCTEM	I _{max} (cd)	1390	S/MH (C0/180)	1.27
NOMINAL POWER (W)	35	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4013.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.1
NOMINAL FLUX (lm)	4013.26	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	<input type="checkbox"/> down (%)	99.9	CIBSE SHR MAX	1.35

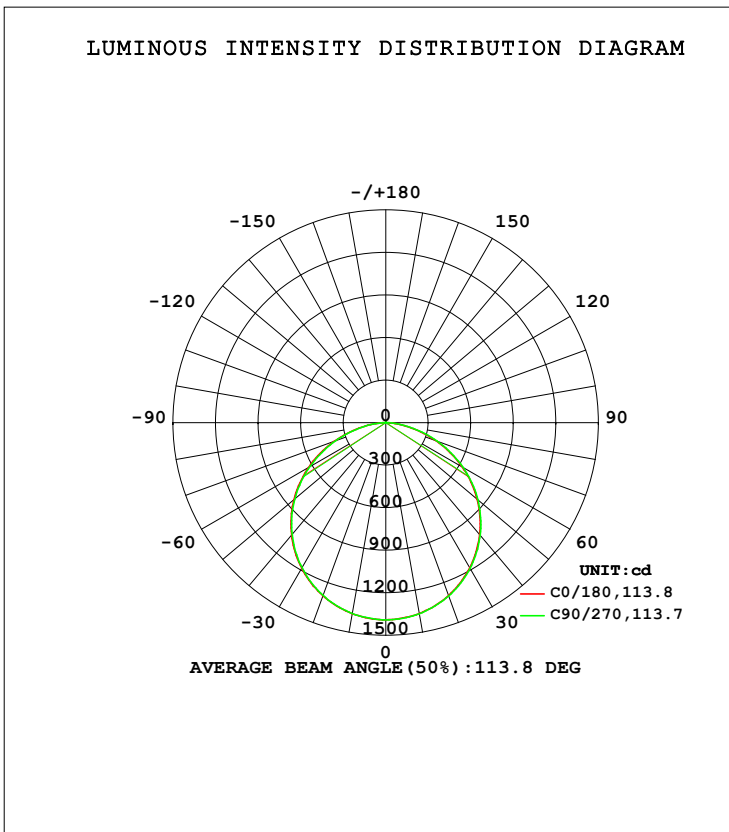

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators: Eugene
 Test Date: 18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1366	1367	1368	1368	1368	1366	1366	1366	0- 10	131.6	131.6	3.28,3.28
20	1297	1298	1300	1299	1299	1296	1296	1295	10- 20	377.5	509.1	12.7,12.7
30	1183	1186	1188	1187	1186	1183	1182	1181	20- 30	574.2	1083	27,27
40	1030	1034	1036	1036	1033	1031	1028	1028	30- 40	696.0	1779	44.3,44.3
50	841.1	847.6	848.8	850.5	846.0	843.5	839.1	840.2	40- 50	726.6	2506	62.4,62.4
60	621.6	629.5	628.2	633.3	627.7	625.5	616.3	621.7	50- 60	659.4	3165	78.9,78.9
70	379.4	387.7	388.3	391.6	387.0	383.1	377.1	379.3	60- 70	500.4	3666	91.3,91.3
80	142.9	150.2	156.7	154.6	149.9	148.9	148.8	144.4	70- 80	279.0	3945	98.3,98.3
90	0.0014	0.0844	0.0842	0.2041	0	0	0	0	80- 90	64.84	4010	99.9,99.9
100	0.1674	0.0878	0	0	0	0	0	0	90-100	0.0053	4010	99.9,99.9
110	0.5039	0.3689	0.0844	0.3705	0.1662	0.2528	0	0.1709	100-110	0.0892	4010	99.9,99.9
120	1.347	0.9283	0.4783	0.7703	0.6749	0.6187	0.5865	0.4896	110-120	0.5012	4010	99.9,99.9
130	1.335	0.9984	1.255	0.7183	1.264	0.7147	1.179	0.6533	120-130	0.8180	4011	99.9,99.9
140	1.302	0.2535	1.201	0.4218	1.433	0.8107	1.210	0.7421	130-140	0.8549	4012	100,100
150	1.269	0	1.114	0	1.433	1.095	1.241	1.097	140-150	0.6530	4013	100,100
160	1.134	0	1.043	0	1.433	1.278	1.215	1.323	150-160	0.4255	4013	100,100
170	1.369	0	1.093	0	1.433	1.267	1.117	1.153	160-170	0.2330	4013	100,100
180	1.433	0.2531	1.266	0	1.433	1.012	1.097	1.098	170-180	0.0855	4013	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

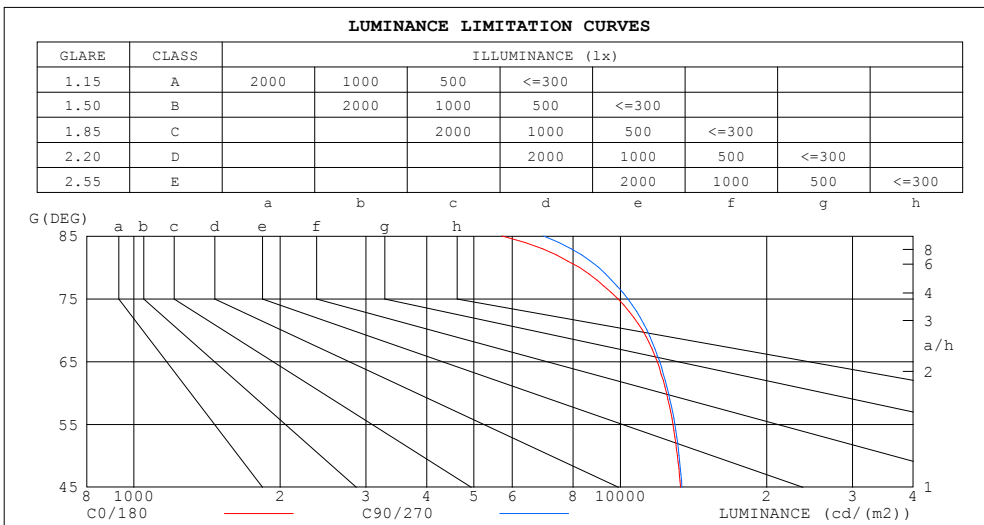

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5710	6956
80	8237	9024
75	9886	10364
70	11104	11353
65	11904	12049
60	12443	12564
55	12825	12951
50	13097	13207
45	13302	13388


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators: Eugene
 Test Date: 18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

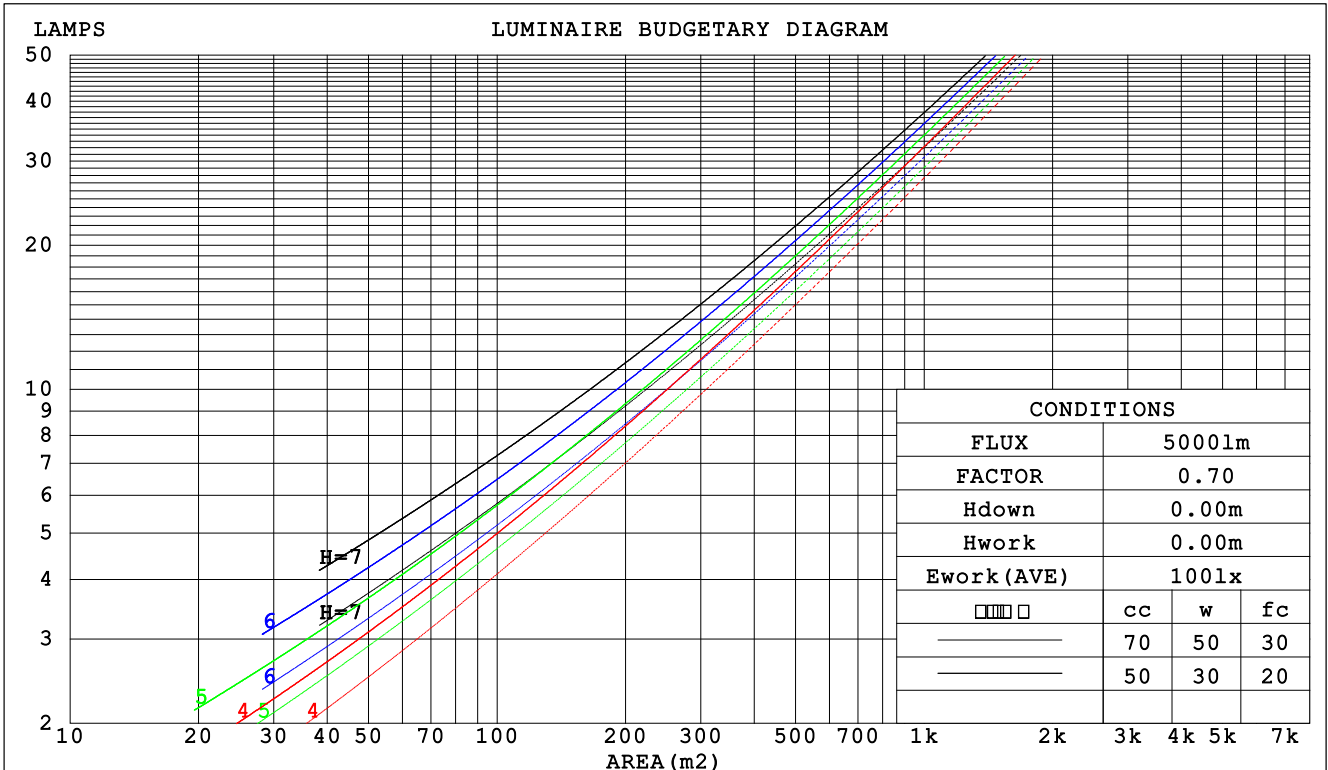

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators: Eugene
 Test Date: 18 January 2022

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.308 .175 .055	.300 .171 .054	.287 .165 .053	.275 .159 .051	.264 .153 .049	
2.0	.291 .159 .049	.285 .157 .048	.273 .152 .047	.262 .147 .046	.252 .143 .045	
3.0	.270 .144 .043	.264 .142 .043	.254 .138 .042	.244 .134 .041	.235 .130 .040	
4.0	.249 .130 .038	.244 .128 .038	.235 .125 .037	.227 .122 .037	.219 .119 .036	
5.0	.231 .117 .034	.226 .116 .034	.218 .114 .033	.210 .111 .033	.203 .109 .033	
6.0	.214 .107 .031	.210 .106 .031	.203 .104 .030	.196 .102 .030	.190 .100 .030	
7.0	.199 .098 .028	.196 .097 .028	.189 .096 .028	.183 .094 .027	.177 .092 .027	
8.0	.186 .091 .026	.183 .090 .025	.177 .088 .025	.172 .087 .025	.166 .085 .025	
9.0	.174 .084 .024	.172 .084 .023	.166 .082 .023	.161 .081 .023	.157 .080 .023	
10.0	.164 .079 .022	.161 .078 .022	.157 .077 .022	.152 .076 .021	.148 .074 .021	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.191 .191 .191	.163 .163 .163	.112 .112 .112	.064 .064 .064	.020 .020 .020	
1.0	.181 .157 .135	.155 .135 .116	.106 .093 .080	.061 .054 .047	.020 .017 .015	
2.0	.173 .133 .099	.148 .114 .085	.101 .079 .060	.058 .046 .035	.019 .015 .011	
3.0	.165 .115 .075	.142 .099 .065	.097 .069 .046	.056 .040 .027	.018 .013 .009	
4.0	.158 .102 .059	.135 .088 .051	.093 .061 .036	.054 .036 .021	.017 .012 .007	
5.0	.150 .091 .048	.129 .079 .042	.089 .055 .029	.051 .032 .017	.017 .011 .006	
6.0	.143 .083 .040	.123 .072 .035	.085 .050 .025	.049 .030 .015	.016 .010 .005	
7.0	.136 .076 .034	.117 .066 .030	.081 .046 .021	.047 .027 .012	.015 .009 .004	
8.0	.130 .070 .029	.112 .061 .026	.077 .043 .018	.045 .025 .011	.015 .008 .004	
9.0	.124 .065 .026	.107 .057 .023	.074 .040 .016	.043 .024 .010	.014 .008 .003	
10.0	.118 .061 .023	.102 .053 .020	.071 .037 .014	.041 .022 .009	.013 .007 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm										
NAME: VFPR22CCTEM					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.7	21.4	23.0	23.4	21.1	22.8	21.5	23.1	23.4
3H	22.9	24.3	23.2	24.7	25.0	22.9	24.4	23.3	24.7	25.1
4H	23.5	24.9	23.9	25.2	25.6	23.6	25.0	24.0	25.3	25.7
6H	23.9	25.2	24.3	25.6	25.9	24.0	25.3	24.5	25.7	26.1
8H	24.0	25.2	24.4	25.6	26.0	24.2	25.4	24.6	25.8	26.2
12H	24.1	25.2	24.5	25.6	26.1	24.3	25.5	24.7	25.8	26.3
4H 2H	21.7	23.1	22.1	23.5	23.9	21.8	23.2	22.2	23.5	23.9
3H	23.7	24.9	24.1	25.3	25.7	23.8	25.0	24.2	25.4	25.8
4H	24.5	25.5	24.9	25.9	26.4	24.6	25.6	25.0	26.1	26.5
6H	25.0	25.9	25.4	26.4	26.8	25.2	26.1	25.6	26.5	27.0
8H	25.1	26.0	25.6	26.4	26.9	25.3	26.2	25.8	26.6	27.1
12H	25.2	26.0	25.7	26.5	26.9	25.5	26.2	25.9	26.7	27.2
8H 4H	24.8	25.6	25.2	26.1	26.5	24.9	25.7	25.3	26.2	26.7
6H	25.4	26.1	25.9	26.6	27.1	25.6	26.3	26.1	26.8	27.3
8H	25.6	26.2	26.1	26.7	27.2	25.8	26.5	26.3	27.0	27.5
12H	25.7	26.3	26.2	26.8	27.4	26.0	26.6	26.5	27.1	27.6
12H 4H	24.8	25.6	25.3	26.1	26.5	24.9	25.7	25.4	26.2	26.6
6H	25.5	26.1	26.0	26.6	27.1	25.6	26.3	26.1	26.7	27.3
8H	25.7	26.3	26.2	26.7	27.3	25.9	26.5	26.4	27.0	27.5
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.2DEG
Operators:Eugene
Test Date:18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
Humidity: 60.2%
Test Distance:26.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

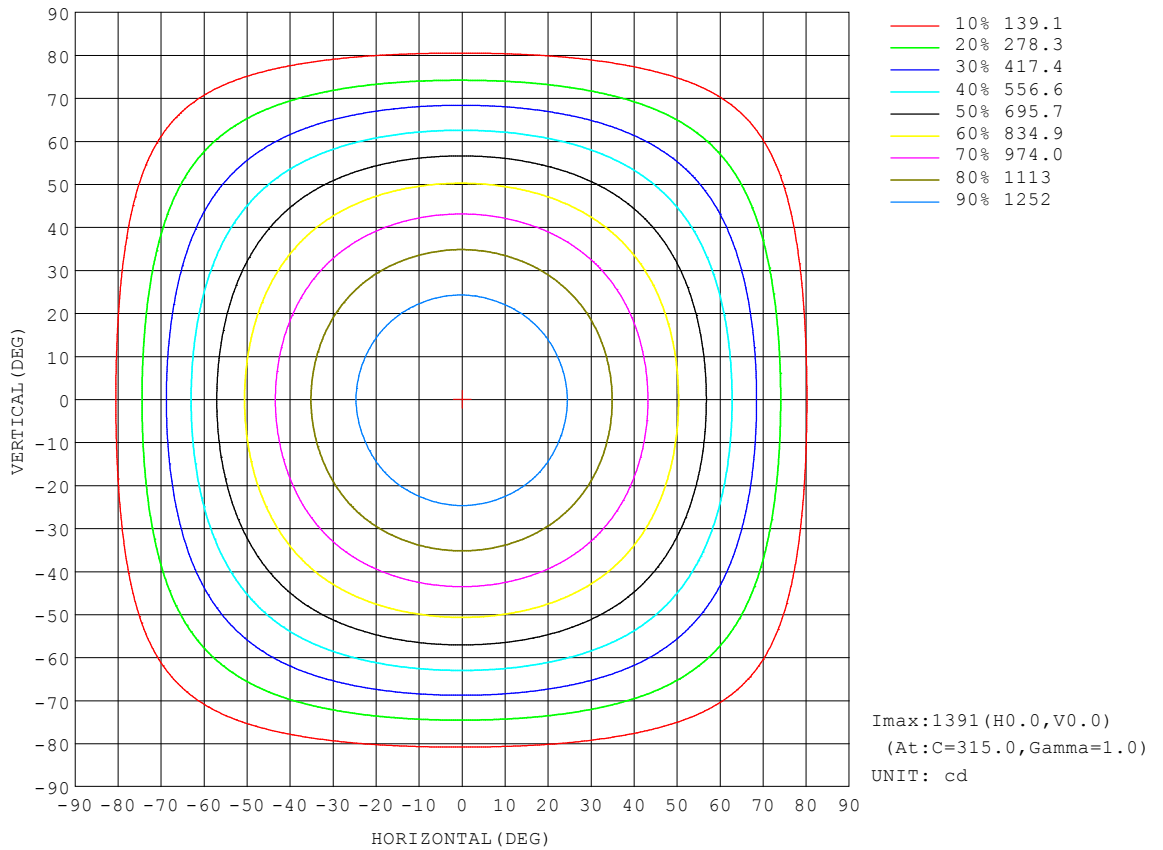


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks:

AAI CURVES

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

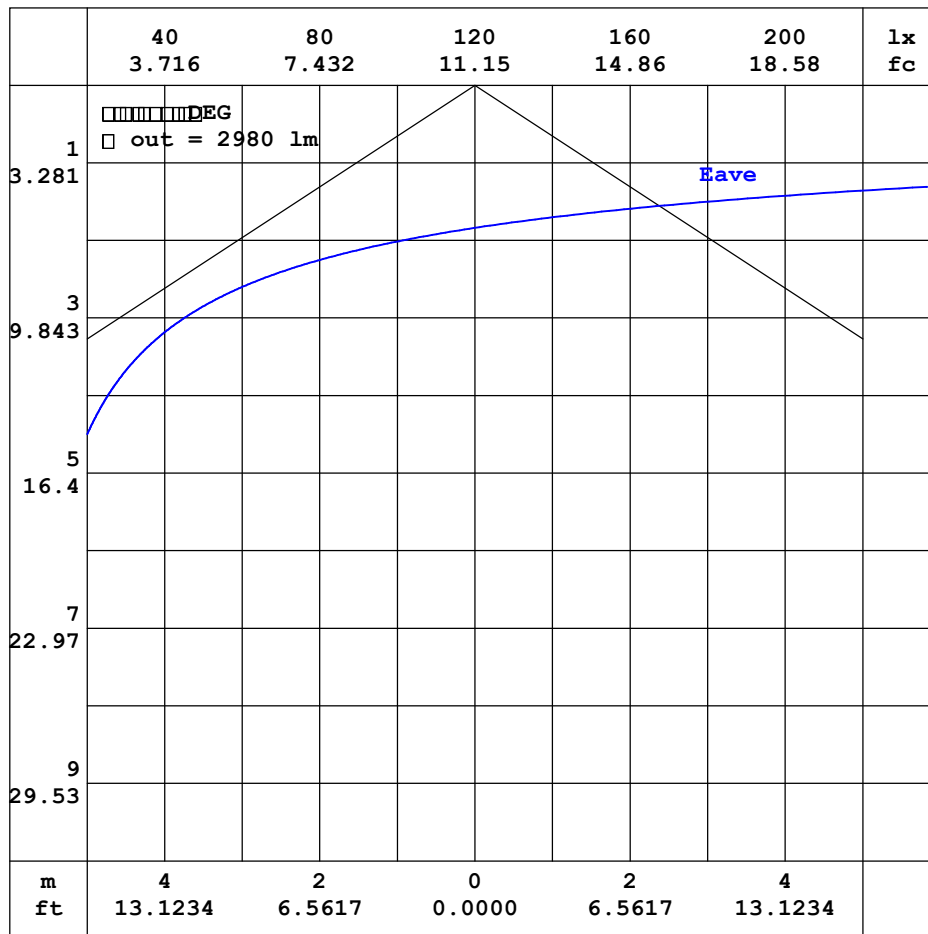


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

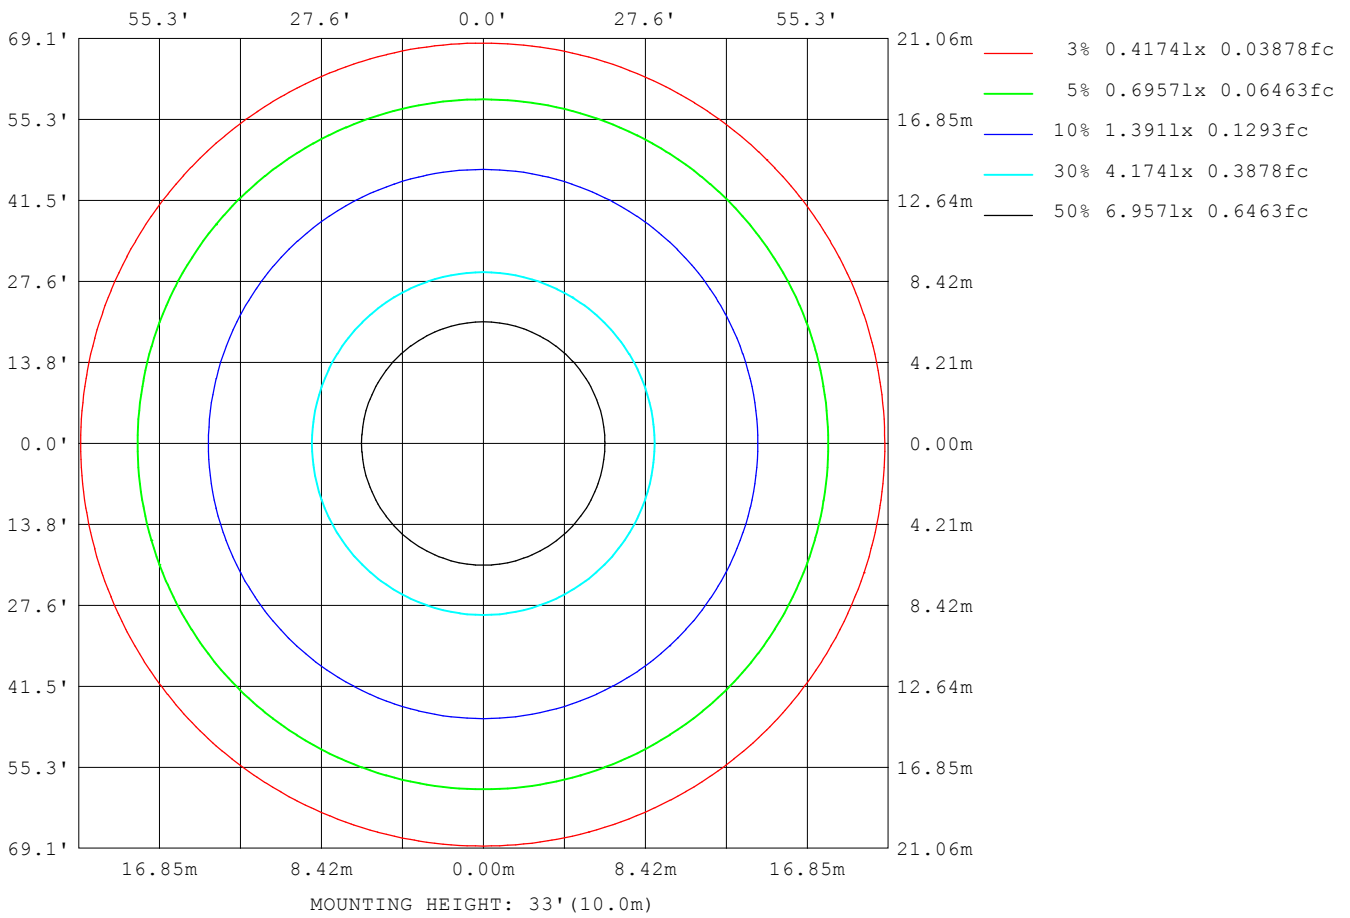

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators: Eugene
 Test Date: 18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11967
L_0~180 (75) av	10038
L_0~180 (85) av	5993
L_90~270 (65) av	11908
L_90~270 (75) av	10173
L_90~270 (85) av	6590
L_45 (65) av	12023
L_45 (75) av	10223
L_45 (85) av	6047

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

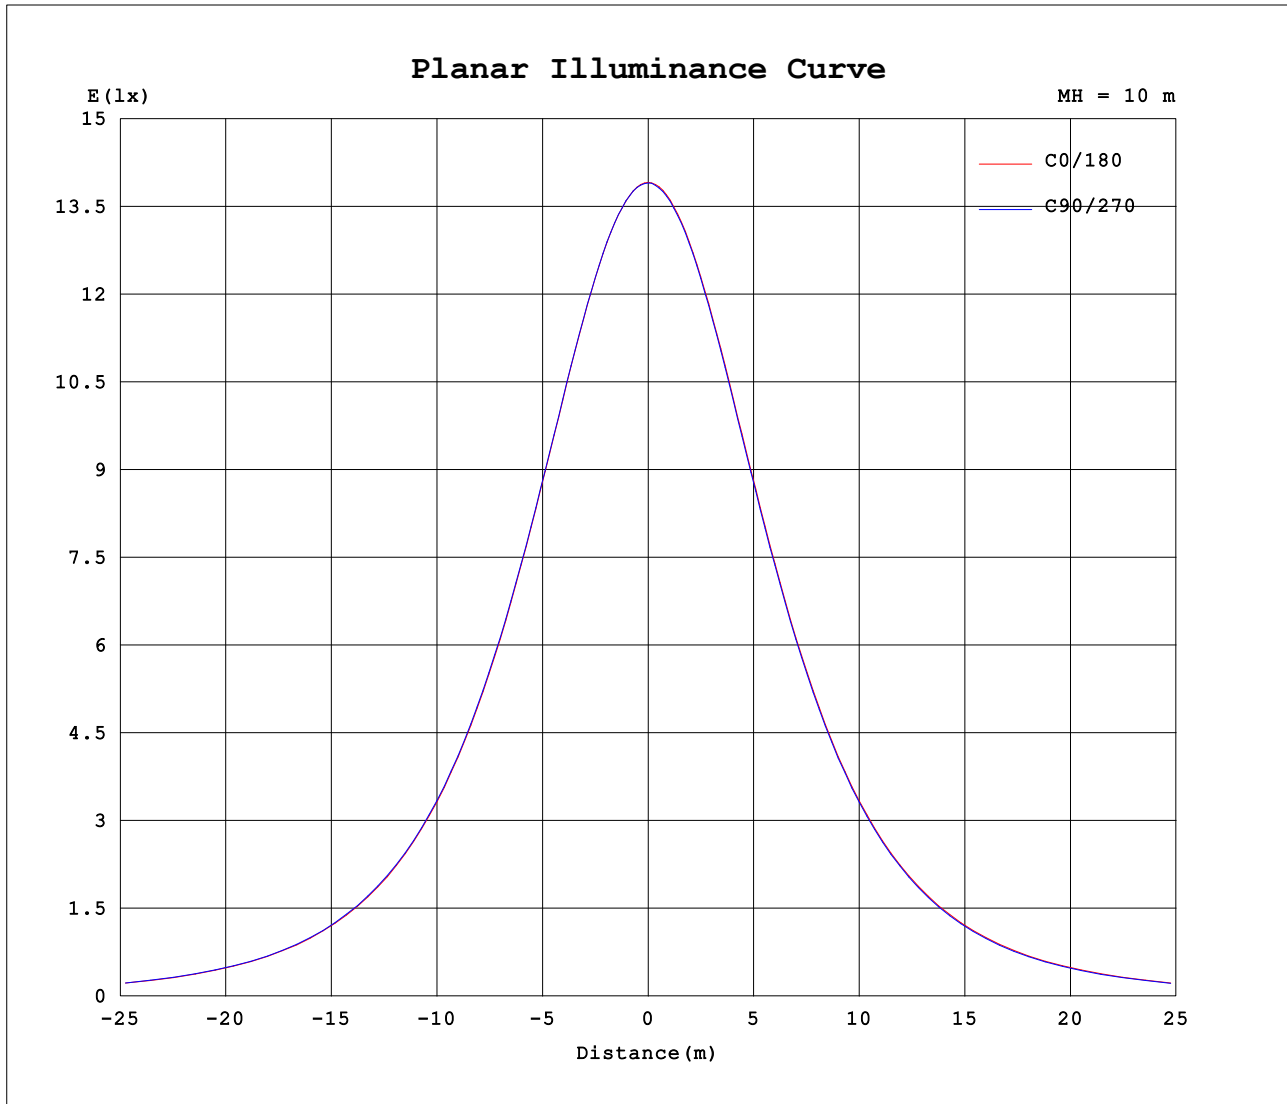

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators: Eugene
 Test Date: 18 January 2022

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance: 26.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.18V I:0.2857A P:33.94W PF:0.9885 Freq:60.01Hz Lamp Flux:4013.26x1 lm		
NAME: VFPR22CCTEM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5				
0	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390	1390				
5	1383	1384	1385	1385	1384	1384	1384	1385	1384	1384	1384	1384	1384	1383	1384	1384	1383			
10	1366	1366	1367	1366	1368	1368	1368	1367	1368	1367	1366	1366	1366	1366	1366	1366				
15	1337	1337	1338	1338	1339	1339	1339	1338	1339	1337	1337	1336	1336	1335	1336	1336				
20	1297	1296	1298	1298	1300	1299	1299	1298	1299	1297	1296	1295	1296	1295	1295	1296				
25	1245	1245	1247	1247	1249	1248	1249	1247	1247	1245	1245	1244	1244	1242	1243	1244				
30	1183	1184	1186	1187	1188	1187	1187	1185	1186	1184	1183	1181	1182	1180	1181	1182				
35	1111	1112	1114	1115	1116	1116	1116	1114	1115	1113	1112	1109	1110	1109	1109	1110				
40	1030	1031	1034	1035	1036	1036	1036	1034	1033	1032	1031	1028	1028	1027	1028	1030				
45	940	941	945	945	947	946	947	944	944	942	941	939	938	937	939	940				
50	841	844	848	848	849	849	850	847	846	844	843	841	839	839	840	842				
55	735	737	742	743	743	744	746	741	740	739	738	734	730	732	735	736				
60	622	625	629	629	628	630	633	629	628	627	626	620	616	618	622	624				
65	503	506	511	510	509	511	515	511	509	508	505	500	497	498	501	505				
70	379	384	388	388	388	390	392	389	387	387	383	380	377	378	379	382				
75	256	261	266	268	268	270	270	267	264	265	263	261	258	259	259	259				
80	143	146	150	156	157	157	155	151	150	149	149	150	149	148	144	145				
85	49.7	50.4	53.4	57.9	60.6	59.3	56.4	53.5	54.7	52.4	51.8	53.4	54.2	51.8	49.2	49.9				
90	0.00	0.00	0.08	0.00	0.08	0.00	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
100	0.17	0.08	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
105	0.08	0.23	0.34	0.09	0.00	0.00	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00				
110	0.50	0.51	0.37	0.17	0.08	0.17	0.37	0.42	0.17	0.08	0.25	0.08	0.00	0.00	0.17	0.08				
115	1.18	1.26	0.42	0.25	0.34	0.34	0.73	1.01	0.34	0.44	0.51	0.30	0.17	0.34	0.44	0.44				
120	1.35	1.24	0.93	0.34	0.48	0.51	0.77	1.06	0.67	0.84	0.62	0.44	0.59	0.46	0.49	0.76				
125	1.35	1.21	0.96	0.87	1.12	1.12	0.74	1.12	0.84	1.01	0.67	0.59	0.80	0.59	0.61	0.80				
130	1.34	1.19	1.00	0.97	1.25	1.22	0.72	1.19	1.26	1.18	0.71	1.26	1.18	1.26	0.65	1.01				
135	1.32	1.16	0.84	1.02	1.23	1.21	0.69	1.25	1.35	1.32	0.76	1.24	1.19	1.30	0.70	1.13				
140	1.30	1.13	0.25	1.07	1.20	1.19	0.42	1.31	1.43	1.43	0.81	1.22	1.21	1.34	0.74	1.36				
145	1.29	1.10	0.00	0.93	1.16	1.18	0.00	1.26	1.43	1.43	0.88	1.21	1.23	1.40	0.89	1.30				
150	1.27	0.87	0.00	0.93	1.11	1.01	0.00	1.01	1.43	1.43	1.09	1.19	1.24	1.36	1.10	1.03				
155	0.93	0.59	0.00	0.86	1.06	0.70	0.00	0.80	1.43	1.43	1.25	0.90	1.26	1.36	1.38	0.51				
160	1.13	0.48	0.00	0.59	1.04	0.65	0.00	0.68	1.43	1.43	1.28	0.42	1.22	1.35	1.32	0.17				
165	1.29	0.49	0.00	0.66	1.07	0.63	0.00	0.73	1.43	1.43	1.27	0.32	1.17	1.33	1.22	0.08				
170	1.37	0.59	0.00	0.75	1.09	0.64	0.00	0.86	1.43	1.43	1.27	0.29	1.12	1.31	1.15	0.08				
175	1.43	0.93	0.34	1.10	1.23	0.91	0.00	1.10	1.43	1.43	1.27	0.26	1.10	1.28	1.10	0.00				
180	1.43	1.01	0.25	1.10	1.27	1.10	0.00	1.18	1.43	1.43	1.01	0.25	1.10	1.27	1.10	0.00				

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.2DEG
 Operators:Eugene
 Test Date:18 January 2022

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity: 60.2%
 Test Distance:26.000m [K=1.0000]
 Remarks: