


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.33 lm/W			
MODEL		Imax(cd)	16677	S/MH(C0/180)	0.31
NOMINAL POWER(W)	34	LOR(%)	118.6	S/MH(C90/270)	0.32
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	2802.5	η UP, DN(C0-180)	1.4, 61.4
NOMINAL FLUX(lm)	2362.2	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.5, 54.4
LAMPS INSIDE	1	η up(%)	2.9	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	230	η down(%)	115.7	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

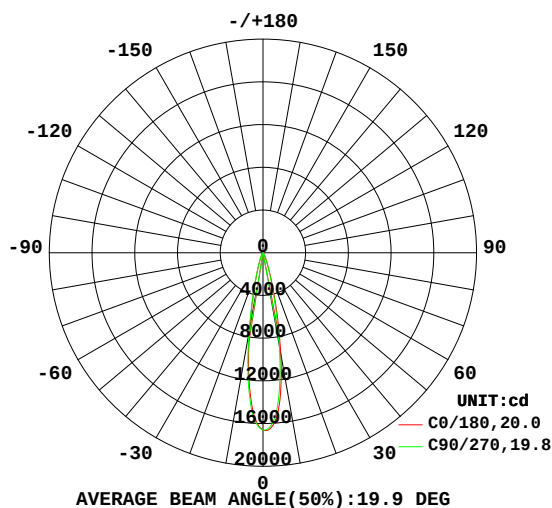

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

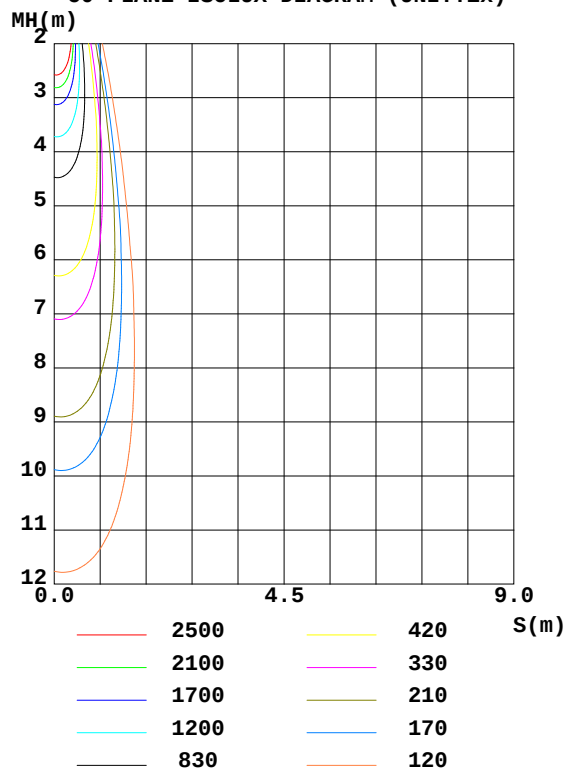

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:28DEG
Operators:cjy
Test Date:2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.190m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	960.5	952.8	881.4	793.7	713.9	695.6	753.5	861.9	0- 10	1169	1169	41.7, 49.5
20	151.4	149.0	136.8	127.2	114.6	109.0	115.3	135.5	10- 20	978.6	2147	76.6, 90.9
30	35.55	35.39	33.84	32.15	30.20	29.50	30.78	33.32	20- 30	295.1	2442	87.1, 103
40	15.90	15.69	15.37	14.94	14.60	14.44	14.76	15.30	30- 40	135.3	2578	92, 109
50	9.365	8.703	8.095	7.982	8.118	8.697	9.193	9.358	40- 50	89.85	2668	95.2, 113
60	3.875	3.020	2.385	2.275	2.517	3.314	4.021	4.151	50- 60	52.47	2720	97.1, 115
70	0.2957	0.1092	0.0469	0.0447	0.0442	0.1255	0.3087	0.3508	60- 70	13.01	2733	97.5, 116
80	0.0458	0.0448	0.0459	0.0457	0.0415	0.0389	0.0396	0.0373	70- 80	0.5580	2734	97.5, 116
90	0.0589	0.0601	0.0632	0.0638	0.0652	0.0595	0.0590	0.0555	80- 90	0.5443	2734	97.6, 116
100	0.0885	0.0910	0.0954	0.0967	0.1022	0.0948	0.0924	0.0895	90-100	0.8283	2735	97.6, 116
110	0.1333	0.1365	0.1427	0.1452	0.1486	0.1417	0.1381	0.1354	100-110	1.218	2736	97.6, 116
120	0.2281	0.2283	0.2373	0.2506	0.2618	0.2534	0.2428	0.2356	110-120	1.795	2738	97.7, 116
130	0.6154	0.6016	0.6387	0.7100	0.8071	0.7923	0.7432	0.6914	120-130	3.657	2742	97.8, 116
140	1.954	1.939	2.028	2.153	2.345	2.340	2.253	2.128	130-140	10.23	2752	98.2, 116
150	3.556	3.556	3.619	3.689	3.787	3.787	3.745	3.659	140-150	18.49	2770	98.9, 117
160	4.115	4.120	4.200	4.181	4.224	4.211	4.241	4.124	150-160	18.51	2789	99.5, 118
170	3.207	3.211	3.282	3.196	3.176	3.167	3.255	3.132	160-170	11.02	2800	99.9, 119
180	2.287	2.276	2.188	2.236	2.286	2.275	2.187	2.235	170-180	2.613	2802	100, 119
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators: cjl
 Test Date: 2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 5.190m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

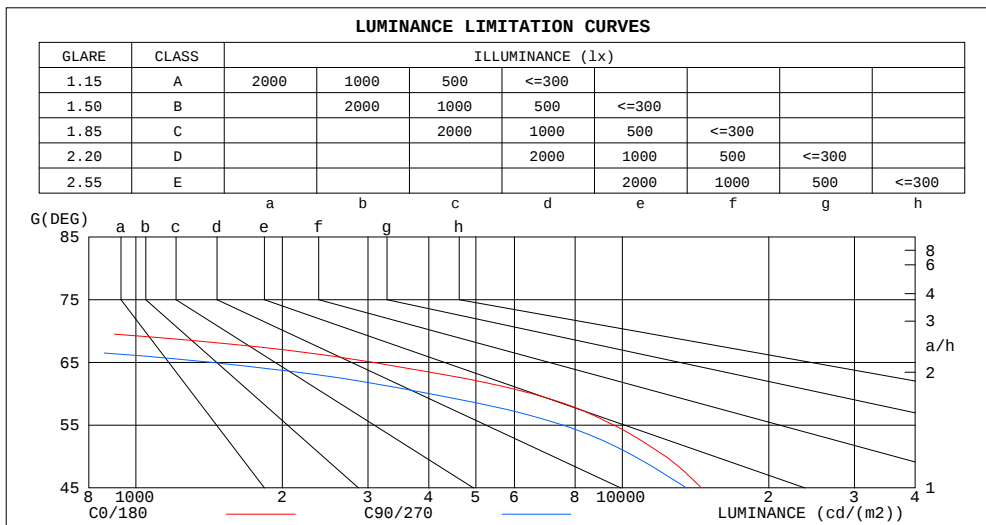

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	493	510
80	222	223
75	143	134
70	728	115
65	3067	1428
60	6530	4016
55	9606	7545
50	12276	10601
45	14533	13551


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators: cjy
 Test Date: 2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 5.190m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.41	1.41	1.41	1.37	1.37	1.37	1.30	1.30	1.30	1.24	1.24	1.24	1.18	1.18	1.18	1.16
1.0	1.33	1.31	1.28	1.30	1.28	1.26	1.25	1.23	1.22	1.20	1.19	1.18	1.16	1.15	1.14	1.12
2.0	1.26	1.23	1.20	1.24	1.21	1.18	1.20	1.17	1.15	1.16	1.14	1.12	1.13	1.11	1.09	1.08
3.0	1.21	1.16	1.13	1.19	1.15	1.12	1.16	1.12	1.09	1.12	1.10	1.07	1.10	1.07	1.06	1.04
4.0	1.16	1.11	1.07	1.14	1.10	1.06	1.11	1.08	1.05	1.09	1.06	1.03	1.07	1.04	1.02	1.00
5.0	1.11	1.06	1.03	1.10	1.05	1.02	1.08	1.04	1.01	1.06	1.02	1.00	1.04	1.01	1.00	1.00
6.0	1.07	1.02	1.00	1.06	1.02	1.00	1.05	1.00	1.00	1.03	1.00	1.00	1.01	1.00	1.00	1.00
7.0	1.04	1.00	1.00	1.03	1.00	1.00	1.02	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
8.0	1.01	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
9.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
10.0	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00

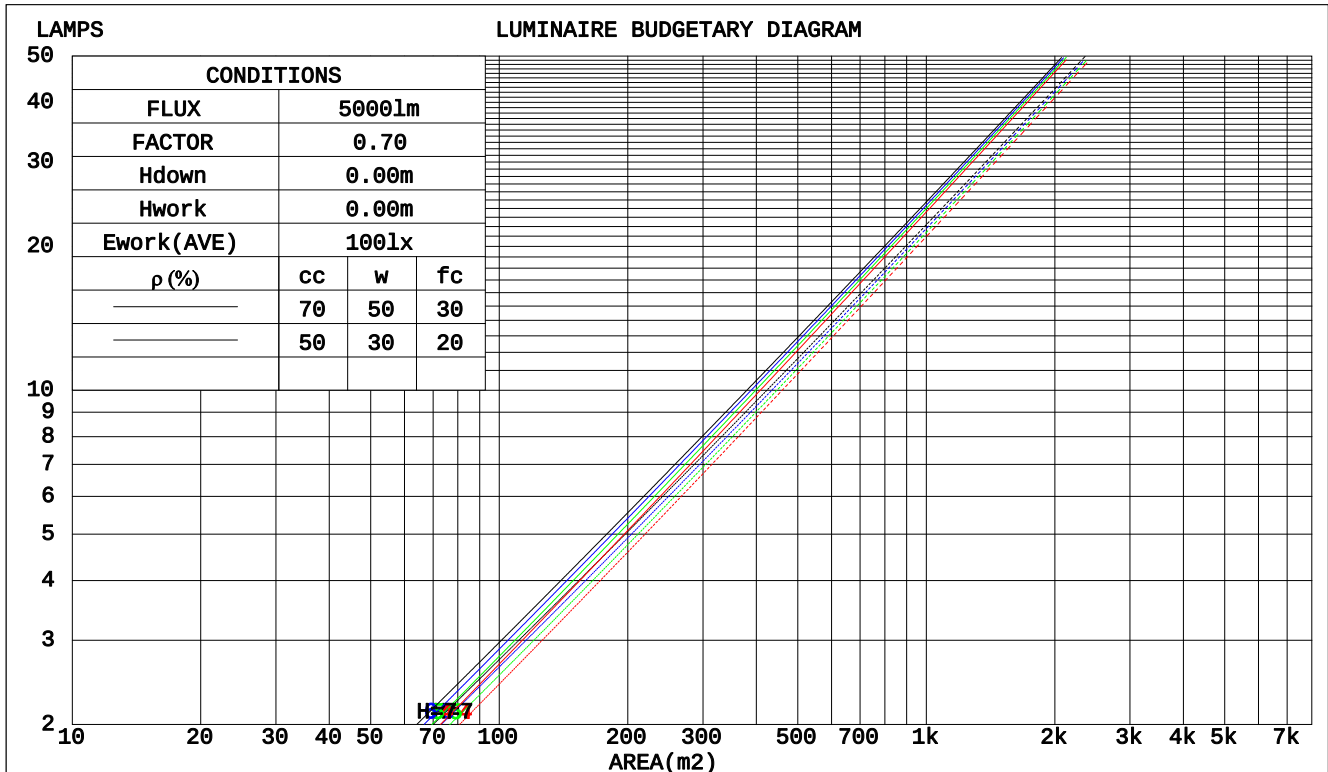

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators: cjy
 Test Date: 2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 5.190m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρ _{cc}	80%			70%			50%			30%			10%			0	
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.168	.096	.030	.159	.091	.029	.143	.082	.026	.128	.074	.024	.114	.066	.021		
2.0	.157	.086	.026	.149	.082	.025	.136	.075	.023	.123	.069	.022	.111	.063	.020		
3.0	.146	.078	.023	.140	.075	.023	.128	.070	.021	.118	.064	.020	.108	.060	.018		
4.0	.137	.071	.021	.131	.069	.020	.121	.064	.019	.112	.060	.018	.104	.056	.017		
5.0	.128	.065	.019	.124	.064	.019	.115	.060	.018	.107	.057	.017	.100	.053	.016		
6.0	.121	.061	.017	.117	.059	.017	.109	.056	.016	.102	.053	.016	.096	.051	.015		
7.0	.114	.057	.016	.111	.055	.016	.104	.053	.015	.098	.050	.015	.092	.048	.014		
8.0	.108	.053	.015	.105	.052	.015	.099	.050	.014	.094	.048	.014	.089	.046	.013		
9.0	.103	.050	.014	.100	.049	.014	.095	.047	.013	.090	.045	.013	.086	.043	.013		
10.0	.098	.047	.013	.096	.046	.013	.091	.045	.013	.087	.043	.012	.083	.042	.012		

ρ _{CC}	80%			70%			50%			30%			10%			0	
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ _{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.248	.248	.248	.212	.212	.212	.145	.145	.145	.083	.083	.083	.027	.027	.027		
1.0	.222	.209	.197	.190	.180	.170	.130	.124	.118	.075	.071	.068	.024	.023	.022		
2.0	.201	.180	.162	.173	.155	.140	.118	.107	.097	.068	.062	.057	.022	.020	.019		
3.0	.184	.157	.135	.158	.135	.117	.108	.094	.082	.063	.055	.048	.020	.018	.016		
4.0	.170	.139	.115	.145	.120	.100	.100	.084	.071	.058	.049	.042	.019	.016	.014		
5.0	.157	.124	.100	.135	.108	.087	.093	.075	.062	.054	.044	.037	.017	.014	.012		
6.0	.147	.113	.088	.126	.098	.077	.087	.068	.054	.050	.040	.032	.016	.013	.011		
7.0	.138	.103	.079	.118	.089	.069	.082	.063	.049	.047	.037	.029	.015	.012	.010		
8.0	.130	.095	.071	.112	.082	.062	.077	.058	.044	.045	.034	.026	.015	.011	.009		
9.0	.123	.088	.065	.106	.077	.057	.073	.054	.040	.043	.032	.024	.014	.010	.008		
10.0	.117	.083	.060	.101	.072	.052	.070	.050	.037	.041	.030	.022	.013	.010	.007		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:cjy
 Test Date:2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: VM090						TYPE:			WEIGHT:1		
SPEC.:BR 3000K 34W 90CRI 15D						DIM.:			SERIAL No.:		
MFR.:						SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	11.1	11.7	11.3	11.9	12.1	10.4	11.1	10.7	11.3	11.4
	3H	11.0	11.6	11.3	11.8	12.1	10.3	10.9	10.6	11.1	11.3
	4H	10.9	11.5	11.2	11.7	12.0	10.2	10.8	10.5	11.0	11.3
	6H	10.8	11.4	11.1	11.6	11.9	10.1	10.7	10.4	10.9	11.2
	8H	10.8	11.3	11.1	11.6	11.9	10.1	10.6	10.4	10.9	11.2
	12H	10.7	11.2	11.1	11.5	11.8	10.0	10.5	10.4	10.8	11.1
4H	2H	11.0	11.6	11.3	11.8	12.1	10.4	11.0	10.7	11.2	11.5
	3H	10.9	11.4	11.2	11.7	12.0	10.2	10.7	10.6	11.0	11.4
	4H	10.8	11.3	11.2	11.6	11.9	10.1	10.6	10.5	10.9	11.3
	6H	10.7	11.1	11.1	11.5	11.9	10.0	10.4	10.4	10.8	11.2
	8H	10.6	11.0	11.1	11.4	11.8	10.0	10.4	10.4	10.7	11.2
	12H	10.6	10.9	11.0	11.3	11.8	9.9	10.3	10.4	10.7	11.1
8H	4H	10.6	11.0	11.1	11.4	11.8	10.0	10.4	10.4	10.7	11.2
	6H	10.5	10.8	11.0	11.3	11.7	9.8	10.2	10.3	10.6	11.1
	8H	10.4	10.7	10.9	11.2	11.7	9.8	10.1	10.3	10.5	11.0
	12H	10.4	10.6	10.9	11.1	11.6	9.7	10.0	10.2	10.5	11.0
12H	4H	10.6	10.9	11.0	11.3	11.8	9.9	10.3	10.4	10.7	11.1
	6H	10.4	10.7	10.9	11.2	11.7	9.8	10.1	10.3	10.5	11.0
	8H	10.4	10.6	10.9	11.1	11.6	9.7	10.0	10.2	10.5	11.0
Variations with the observer position at spacings:											
S = 1.0H		+ 1.2 / - 2.0					+ 1.6 / - 3.0				
1.5H		+ 0.9 / - 0.9					+ 1.1 / - 1.1				
2.0H		+ 2.5 / - 5.5					+ 3.0 / - 6.1				

CIE Pub.117, 2362 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 3.0$)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators: cjy
 Test Date: 2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 5.190m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	103	95	91	102	95	90	101	94	90	86
0.80	111	104	100	110	104	100	109	103	99	95
1.00	117	110	106	116	109	105	113	109	104	100
1.25	121	115	111	120	114	111	117	113	109	104
1.50	125	119	115	123	118	114	120	116	113	107
2.00	128	123	119	126	122	118	122	119	116	109
2.50	130	125	122	128	124	121	124	120	118	110
3.00	132	128	124	129	126	123	125	122	120	112
4.00	134	131	128	132	129	126	127	125	123	113
5.00	136	133	131	133	131	129	128	126	125	115
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:cjy
 Test Date:2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

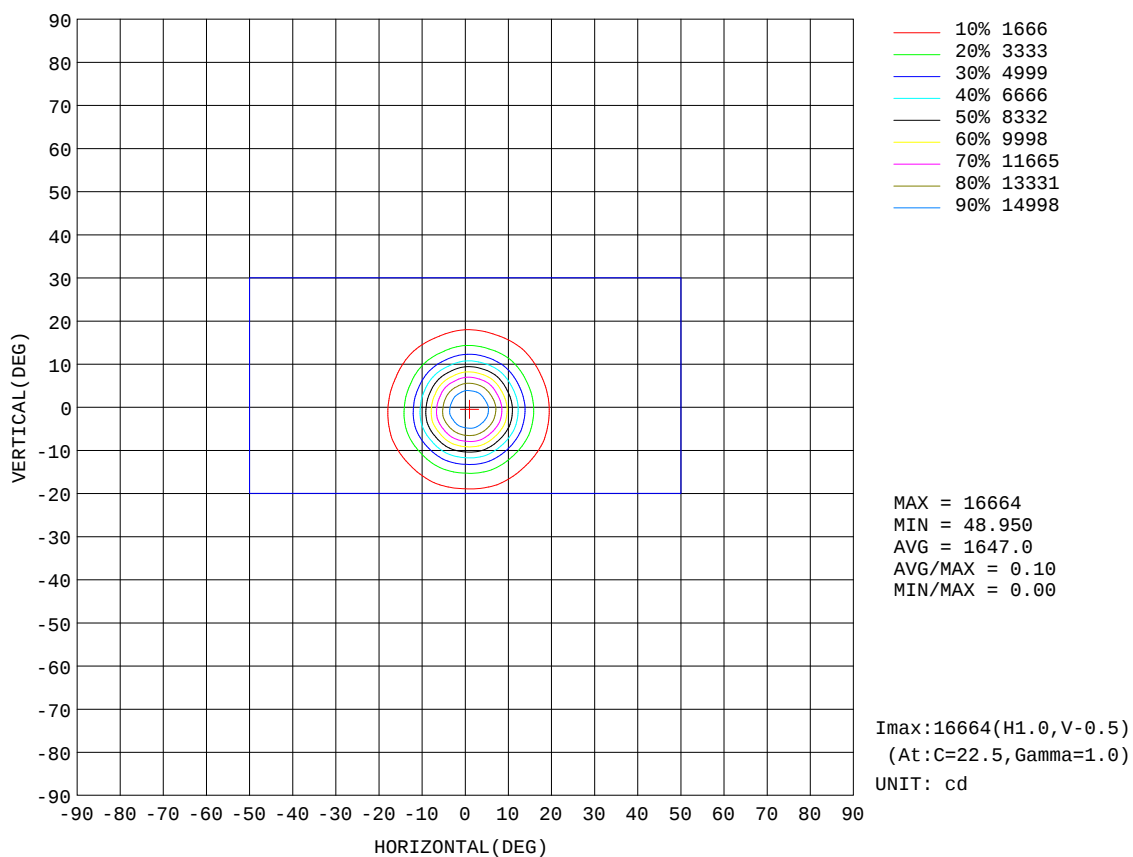


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:cjy
 Test Date:2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

AAI Figure

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

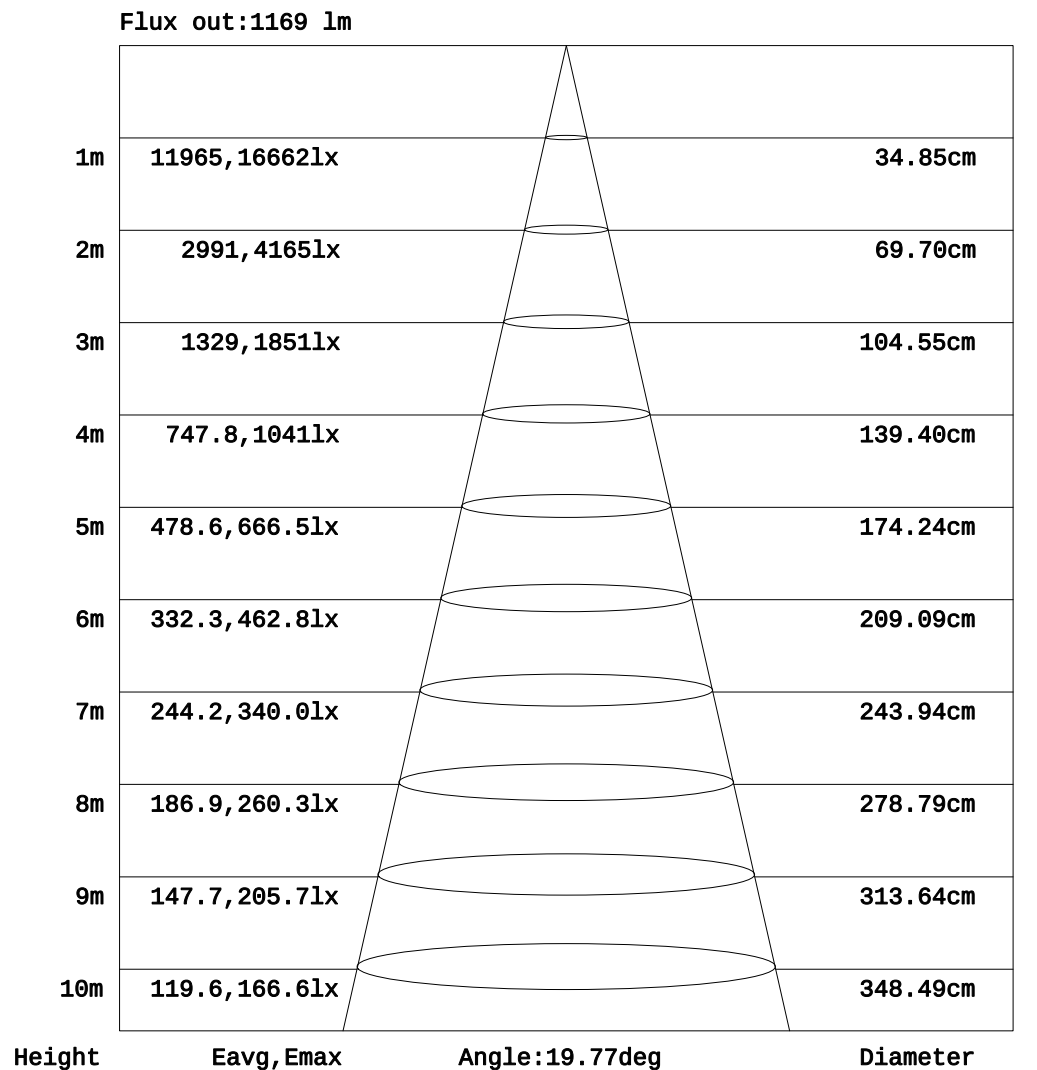


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature:28DEG
 Operators:cjy
 Test Date:2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity:65.0%
 Test Distance:5.190m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

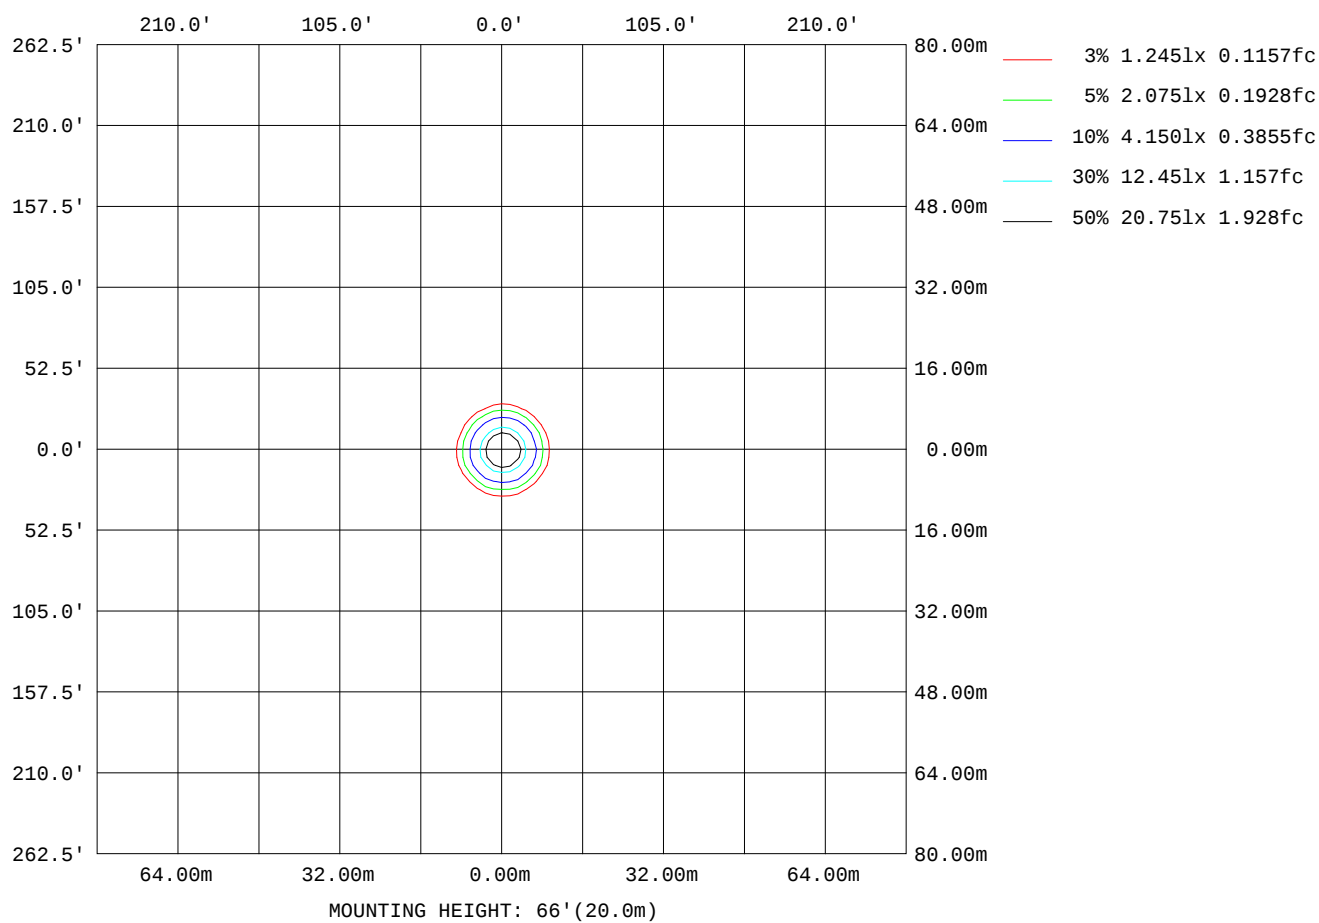

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature: 28DEG
Operators: cjl
Test Date: 2020-08-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.401
Humidity: 65.0%
Test Distance: 5.190m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2292
L_0~180(75)av	132
L_0~180(85)av	492
L_90~270(65)av	2333
L_90~270(75)av	133
L_90~270(85)av	481
L_45(65)av	2291
L_45(75)av	125
L_45(85)av	468

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: MEDIUM
 Temperature: 28DEG
 Operators: cjl
 Test Date: 2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.401
 Humidity: 65.0%
 Test Distance: 5.190m [K=1.0000]
 Remarks:

Planar Illuminance Curve

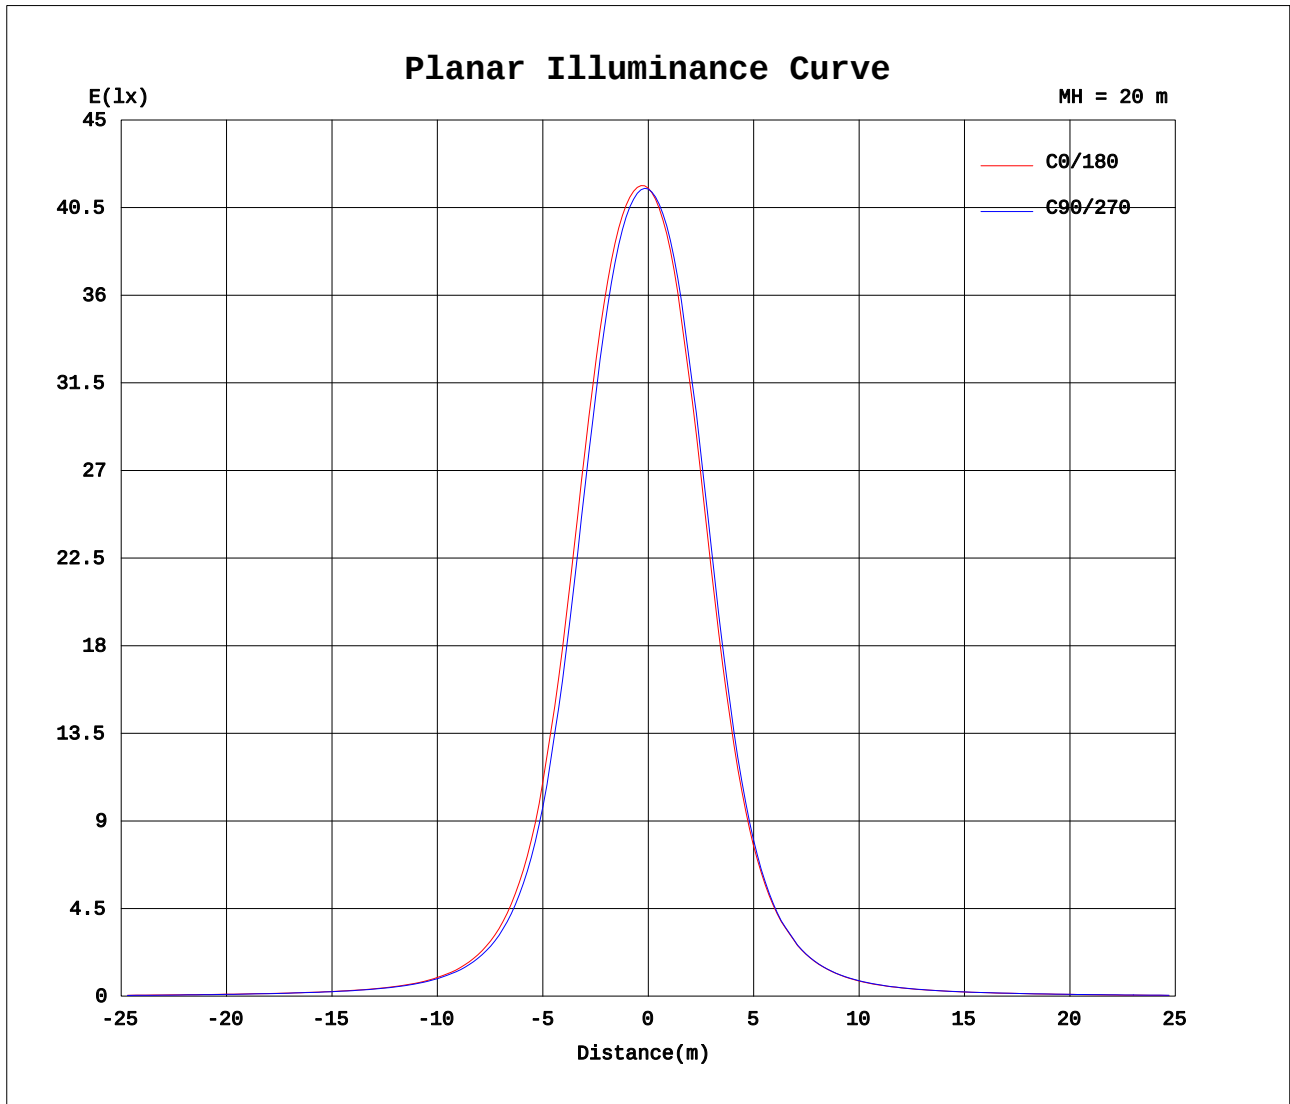

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:28DEG
Operators:cjy
Test Date:2020-08-26

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.190m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: VM090	TYPE:	WEIGHT:1
SPEC.:BR 3000K 34W 90CRI 15D	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

C(°)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
γ (°)	0	1659	1659	1659	1659	1659	1659	1659	1659	1659	1659	1659	1659	1659	1659	1659			
5	1527	1541	1527	1519	1482	1459	1415	1392	1347	1334	1340	1352	1387	1420	1465	1485			
10	961	986	953	940	881	854	794	771	714	682	696	701	753	791	862	893			
15	395	411	388	385	353	345	318	311	283	263	268	266	290	305	345	358			
20	151	160	149	151	137	137	127	125	115	107	109	108	115	120	136	139			
25	66.7	69.3	66.3	66.4	62.9	61.6	59.5	58.0	53.8	51.4	51.9	51.7	54.6	56.8	61.0	63.2			
30	35.6	36.4	35.4	35.3	33.8	33.5	32.1	31.9	30.2	29.3	29.5	29.5	30.8	31.5	33.3	33.9			
35	22.4	22.7	22.2	22.1	21.5	21.3	20.6	20.5	19.8	19.4	19.5	19.5	20.1	20.5	21.3	21.6			
40	15.9	16.0	15.7	15.7	15.4	15.3	14.9	14.9	14.6	14.4	14.4	14.4	14.8	14.9	15.3	15.5			
45	12.2	12.2	11.9	11.7	11.4	11.3	11.2	11.3	11.2	11.3	11.4	11.4	11.6	11.7	11.9	11.9			
50	9.37	9.15	8.70	8.45	8.09	8.00	7.98	8.12	8.12	8.33	8.70	8.94	9.19	9.28	9.36	9.29			
55	6.54	6.32	5.85	5.55	5.14	5.04	5.03	5.23	5.28	5.54	5.98	6.25	6.58	6.65	6.68	6.54			
60	3.88	3.56	3.02	2.73	2.39	2.31	2.27	2.45	2.52	2.79	3.31	3.67	4.02	4.12	4.15	3.96			
65	1.54	1.37	1.06	0.91	0.72	0.64	0.63	0.73	0.76	0.89	1.17	1.37	1.63	1.70	1.74	1.59			
70	0.30	0.22	0.11	0.07	0.05	0.04	0.04	0.05	0.04	0.06	0.13	0.21	0.31	0.33	0.35	0.31			
75	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			
80	0.05	0.05	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			
85	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.04	0.04	0.04			
90	0.06	0.06	0.06	0.06	0.06	0.07	0.06	0.07	0.07	0.06	0.06	0.06	0.06	0.05	0.06	0.05			
95	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.07			
100	0.09	0.09	0.09	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09			
105	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11	0.11	0.11	0.11	0.11			
110	0.13	0.14	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.13	0.14	0.14			
115	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.18	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.17			
120	0.23	0.22	0.23	0.23	0.24	0.24	0.25	0.25	0.26	0.26	0.25	0.25	0.24	0.24	0.24	0.24			
125	0.35	0.34	0.34	0.34	0.36	0.37	0.39	0.40	0.43	0.44	0.42	0.42	0.40	0.39	0.38	0.37			
130	0.62	0.59	0.60	0.60	0.64	0.66	0.71	0.72	0.81	0.82	0.79	0.78	0.74	0.73	0.69	0.68			
135	1.15	1.11	1.13	1.14	1.20	1.23	1.31	1.34	1.48	1.50	1.47	1.45	1.39	1.36	1.29	1.27			
140	1.95	1.91	1.94	1.95	2.03	2.07	2.15	2.19	2.34	2.38	2.34	2.33	2.25	2.22	2.13	2.10			
145	2.84	2.80	2.83	2.84	2.92	2.95	3.05	3.05	3.19	3.21	3.19	3.18	3.11	3.07	2.99	2.97			
150	3.56	3.53	3.56	3.57	3.62	3.64	3.69	3.70	3.79	3.81	3.79	3.79	3.75	3.72	3.66	3.64			
155	3.98	3.97	3.99	4.01	4.04	4.05	4.07	4.07	4.13	4.13	4.13	4.14	4.11	4.08	4.04	4.02			
160	4.12	4.10	4.12	4.17	4.20	4.20	4.18	4.17	4.22	4.21	4.21	4.24	4.24	4.19	4.12	4.11			
165	3.88	3.86	3.86	3.98	4.03	3.99	3.88	3.89	3.98	3.89	3.89	3.96	4.01	3.91	3.83	3.81			
170	3.21	3.22	3.21	3.26	3.28	3.25	3.20	3.19	3.18	3.18	3.17	3.20	3.26	3.18	3.13	3.10			
175	2.53	2.55	2.58	2.55	2.51	2.53	2.54	2.49	2.49	2.50	2.50	2.45	2.42	2.45	2.46	2.41			
180	2.29	2.28	2.28	2.18	2.19	2.16	2.24	2.16	2.29	2.27	2.28	2.18	2.19	2.16	2.24	2.16			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: MEDIUM
Temperature:28DEG
Operators:cjy
Test Date:2020-08-26

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.401
Humidity:65.0%
Test Distance:5.190m [K=1.0000]
Remarks: