


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.43 lm/W			
MODEL		I _{max} (cd)	224.2	S/MH(C0/180)	1.44
NOMINAL POWER(W)	12.09	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	1165.8	h UP, DN(C0-180)	11.3, 38.7
NOMINAL FLUX(lm)	1165.81	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	11.3, 38.7
LAMPS INSIDE	1	h up(%)	22.6	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	48	h down(%)	77.4	CIBSE SHR MAX	1.55

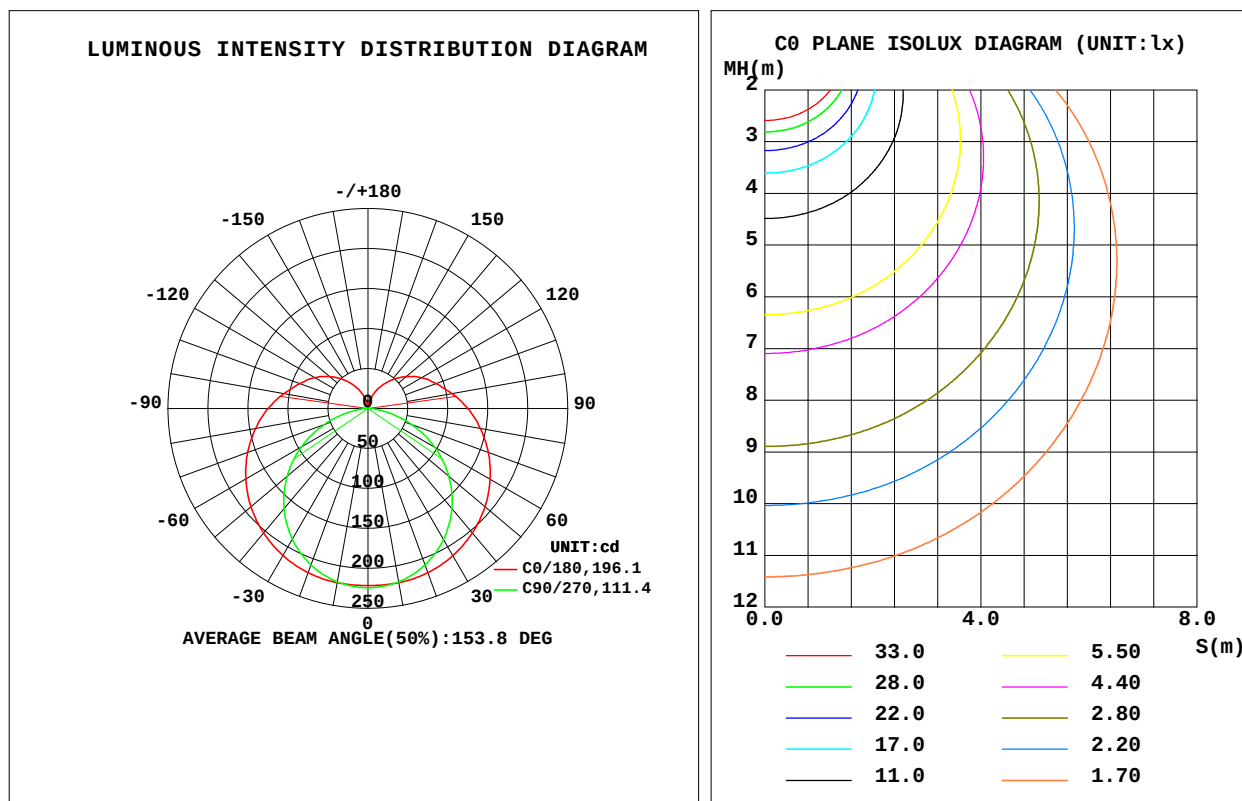

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-12-12

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:



ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	221.2	221.9	220.1	221.9	221.2	221.9	220.1	221.9	0- 10	21.23	21.23	1.82, 1.82
20	218.7	215.1	208.3	215.1	218.7	215.1	208.3	215.1	10- 20	61.75	82.97	7.12, 7.12
30	212.4	203.2	189.1	203.2	212.4	203.2	189.1	203.2	20- 30	96.34	179.3	15.4, 15.4
40	203.1	186.9	163.4	186.9	203.1	186.9	163.4	186.9	30- 40	121.6	300.9	25.8, 25.8
50	191.2	167.6	132.1	167.6	191.2	167.6	132.1	167.6	40- 50	135.4	436.2	37.4, 37.4
60	176.4	146.5	96.26	146.5	176.4	146.5	96.26	146.5	50- 60	137.2	573.5	49.2, 49.2
70	160.1	125.1	57.74	125.1	160.1	125.1	57.74	125.1	60- 70	128.2	701.6	60.2, 60.2
80	142.4	104.3	20.99	104.3	142.4	104.3	20.99	104.3	70- 80	110.8	812.5	69.7, 69.7
90	125.1	85.44	0.7165	85.44	125.1	85.44	0.7165	85.44	80- 90	90.19	902.7	77.4, 77.4
100	107.2	71.48	0.7117	71.48	107.2	71.48	0.7117	71.48	90-100	74.60	977.3	83.8, 83.8
110	91.21	59.35	1.286	59.35	91.21	59.35	1.286	59.35	100-110	60.67	1038	89, 89
120	77.48	45.45	1.995	45.45	77.48	45.45	1.995	45.45	110-120	47.54	1085	93.1, 93.1
130	62.34	37.60	2.491	37.60	62.34	37.60	2.491	37.60	120-130	35.23	1121	96.1, 96.1
140	46.98	26.35	2.752	26.35	46.98	26.35	2.752	26.35	130-140	23.55	1144	98.2, 98.2
150	32.12	16.10	2.909	16.10	32.12	16.10	2.909	16.10	140-150	13.43	1158	99.3, 99.3
160	17.35	7.196	2.972	7.196	17.35	7.196	2.972	7.196	150-160	5.960	1164	99.8, 99.8
170	4.657	4.197	3.260	4.197	4.657	4.197	3.260	4.197	160-170	1.794	1165	100, 100
180	3.283	3.595	3.847	3.595	3.283	3.595	3.847	3.595	170-180	0.3613	1166	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-12

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

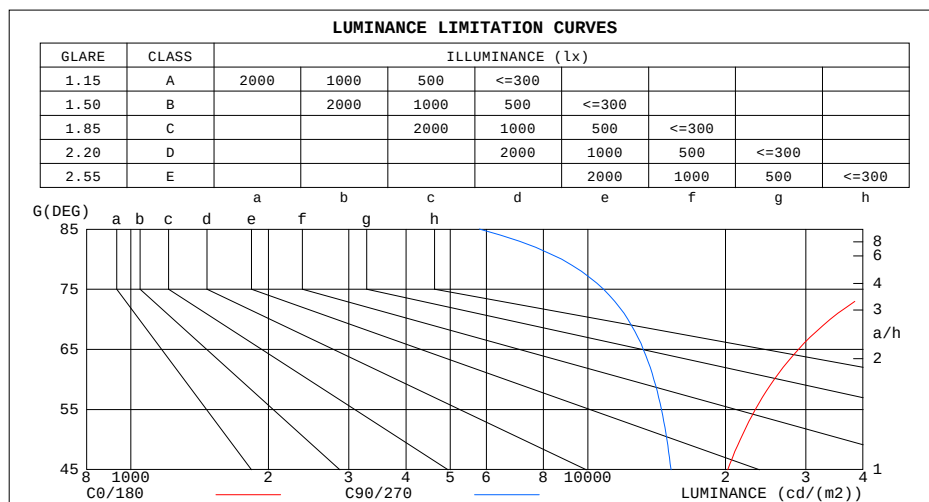

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	111363	5787
80	59439	8761
75	42380	10820
70	33928	12234
65	28882	13230
60	25566	13951
55	23251	14486
50	21553	14892
45	20235	15211


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-12

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.14	1.14	1.14	1.08	1.08	1.08	.99	.99	.99	.90	.90	.90	.81	.81	.81	.77
1.0	.94	.89	.84	.90	.85	.81	.81	.77	.74	.74	.70	.68	.66	.64	.62	.58
2.0	.80	.73	.66	.77	.69	.63	.69	.64	.58	.63	.58	.54	.56	.53	.49	.46
3.0	.70	.61	.53	.66	.58	.51	.60	.53	.48	.54	.49	.44	.49	.44	.41	.37
4.0	.61	.52	.44	.58	.50	.43	.53	.46	.40	.48	.42	.37	.43	.38	.34	.31
5.0	.54	.45	.38	.52	.43	.36	.47	.40	.34	.43	.36	.31	.38	.33	.29	.26
6.0	.48	.39	.32	.46	.38	.31	.42	.35	.29	.38	.32	.27	.35	.29	.25	.23
7.0	.44	.35	.28	.42	.33	.27	.38	.31	.26	.35	.29	.24	.32	.26	.22	.20
8.0	.40	.31	.25	.38	.30	.24	.35	.28	.23	.32	.26	.21	.29	.24	.20	.17
9.0	.36	.28	.22	.35	.27	.21	.32	.25	.20	.29	.23	.19	.27	.21	.18	.16
10.0	.33	.25	.20	.32	.24	.19	.29	.23	.18	.27	.21	.17	.25	.20	.16	.14

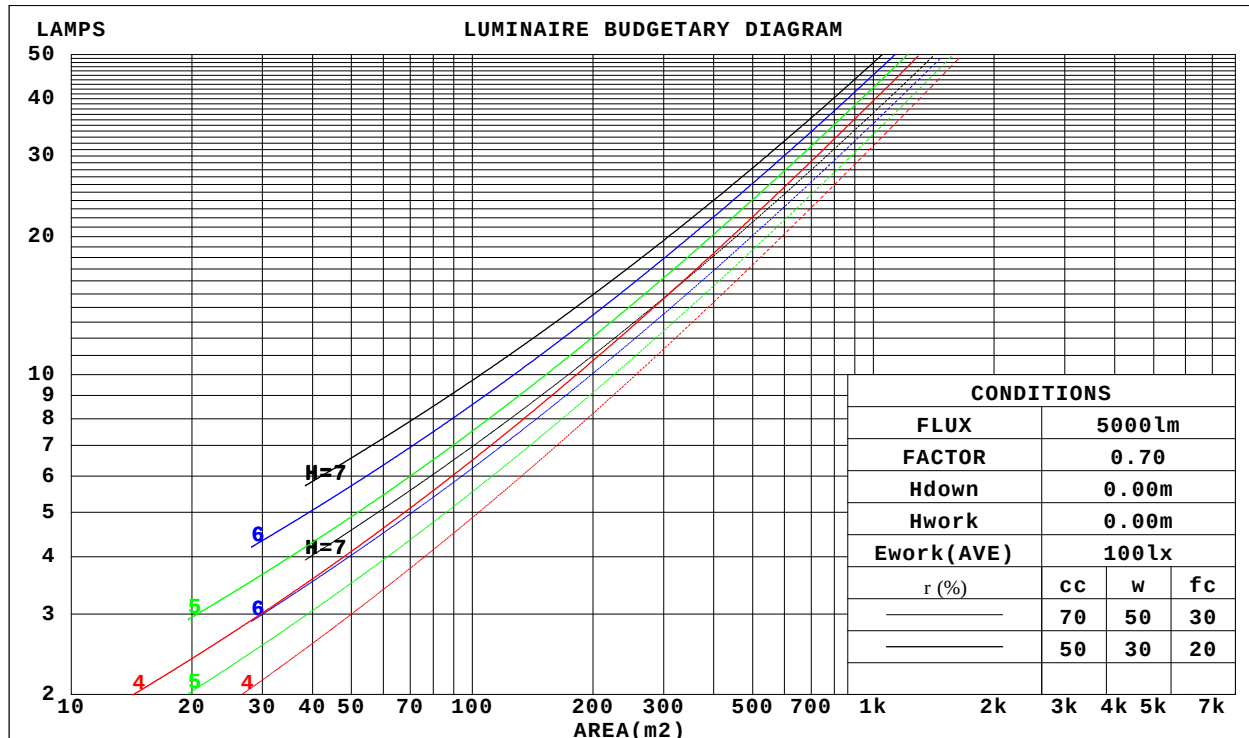

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-12-12

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:



WEC AND CCEC

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm					
NAME: VOM40CD600			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:23*600mm		Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0														
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
r _{fc}	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.389	.221	.070	.375	.214	.068	.348	.200	.064	.324	.187	.060	.302	.175	.056															
2.0	.335	.184	.056	.322	.177	.055	.298	.166	.052	.276	.155	.048	.256	.145	.046															
3.0	.297	.158	.047	.285	.153	.046	.264	.143	.043	.243	.133	.041	.225	.124	.039															
4.0	.267	.139	.041	.256	.134	.040	.237	.125	.037	.218	.117	.035	.201	.109	.033															
5.0	.242	.123	.036	.233	.119	.035	.215	.112	.033	.198	.104	.031	.182	.097	.029															
6.0	.222	.111	.032	.213	.108	.031	.197	.101	.029	.181	.094	.028	.167	.088	.026															
7.0	.204	.101	.029	.196	.098	.028	.181	.092	.026	.167	.086	.025	.154	.080	.024															
8.0	.189	.093	.026	.182	.090	.025	.168	.084	.024	.155	.079	.023	.143	.073	.021															
9.0	.176	.085	.024	.170	.083	.023	.157	.078	.022	.145	.073	.021	.133	.068	.020															
10.0	.165	.079	.022	.159	.077	.021	.147	.072	.020	.136	.067	.019	.125	.063	.018															

r _{CC}	80%			70%			50%			30%			10%			0
r _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.362	.362	.362	.310	.310	.310	.211	.211	.211	.121	.121	.121	.039	.039	.039	
1.0	.359	.329	.302	.307	.282	.259	.210	.194	.179	.121	.112	.104	.039	.036	.034	
2.0	.353	.306	.267	.302	.264	.231	.207	.182	.161	.119	.106	.094	.038	.034	.031	
3.0	.345	.290	.246	.296	.250	.213	.203	.174	.150	.117	.101	.088	.038	.033	.029	
4.0	.337	.278	.232	.290	.240	.202	.199	.167	.142	.115	.098	.084	.037	.032	.028	
5.0	.330	.268	.222	.283	.232	.193	.195	.162	.137	.113	.095	.081	.036	.031	.027	
6.0	.322	.260	.215	.277	.225	.188	.191	.158	.133	.111	.093	.079	.036	.030	.026	
7.0	.315	.254	.210	.271	.220	.183	.187	.154	.130	.109	.091	.077	.035	.030	.026	
8.0	.309	.248	.206	.266	.215	.180	.184	.151	.128	.107	.089	.076	.035	.029	.025	
9.0	.302	.243	.203	.261	.211	.177	.181	.148	.126	.105	.088	.075	.034	.029	.025	
10.0	.297	.239	.201	.256	.208	.175	.177	.146	.125	.103	.086	.074	.034	.028	.025	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-12

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm											
NAME: VOM40CD600					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:23*600mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.2	23.6	22.8	24.1	24.8	20.2	21.5	20.7	22.0	22.7	
	3H	25.0	26.3	25.6	26.9	27.5	21.7	22.9	22.3	23.5	24.2
	4H	26.6	27.8	27.2	28.4	29.1	22.3	23.5	22.9	24.1	24.8
	6H	28.4	29.5	29.0	30.1	30.8	22.7	23.8	23.4	24.4	25.2
	8H	29.3	30.4	30.0	31.0	31.8	22.8	23.9	23.5	24.5	25.3
	12H	30.5	31.5	31.1	32.2	32.9	22.9	23.9	23.5	24.5	25.3
4H	2H	22.8	24.0	23.4	24.6	25.3	21.4	22.5	22.0	23.1	23.9
	3H	25.8	26.9	26.5	27.5	28.3	23.2	24.3	23.9	24.9	25.7
	4H	27.6	28.5	28.3	29.2	30.0	24.1	25.0	24.8	25.7	26.5
	6H	29.5	30.4	30.2	31.1	31.9	24.7	25.6	25.5	26.3	27.1
	8H	30.6	31.4	31.4	32.1	33.0	25.0	25.8	25.7	26.5	27.3
	12H	31.9	32.6	32.6	33.4	34.2	25.1	25.8	25.8	26.6	27.4
8H	4H	28.0	28.7	28.7	29.5	30.3	25.3	26.0	26.0	26.8	27.6
	6H	30.2	30.9	30.9	31.6	32.5	26.4	27.0	27.1	27.8	28.7
	8H	31.5	32.1	32.3	32.9	33.8	26.8	27.4	27.6	28.2	29.1
	12H	33.0	33.5	33.8	34.3	35.2	27.2	27.7	28.0	28.5	29.5
12H	4H	28.0	28.7	28.7	29.4	30.3	25.6	26.3	26.3	27.1	27.9
	6H	30.3	30.9	31.1	31.7	32.6	27.0	27.6	27.8	28.4	29.3
	8H	31.7	32.3	32.5	33.0	34.0	27.7	28.2	28.5	29.0	29.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.3 / - 0.5					

CIE Pub.117, 1166 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.5$)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-12

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	46	33	26	45	33	26	43	32	25	19
0.80	55	42	34	53	41	33	50	39	32	24
1.00	63	50	41	61	48	40	57	48	39	30
1.25	70	57	48	67	55	47	62	52	45	35
1.50	75	62	53	72	60	52	66	57	50	39
2.00	82	71	62	79	68	61	72	64	57	45
2.50	87	76	68	83	73	66	76	68	62	48
3.00	90	81	73	86	78	71	79	72	66	52
4.00	95	87	80	91	84	77	83	77	72	56
5.00	98	91	85	94	87	82	86	80	76	59
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-12

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

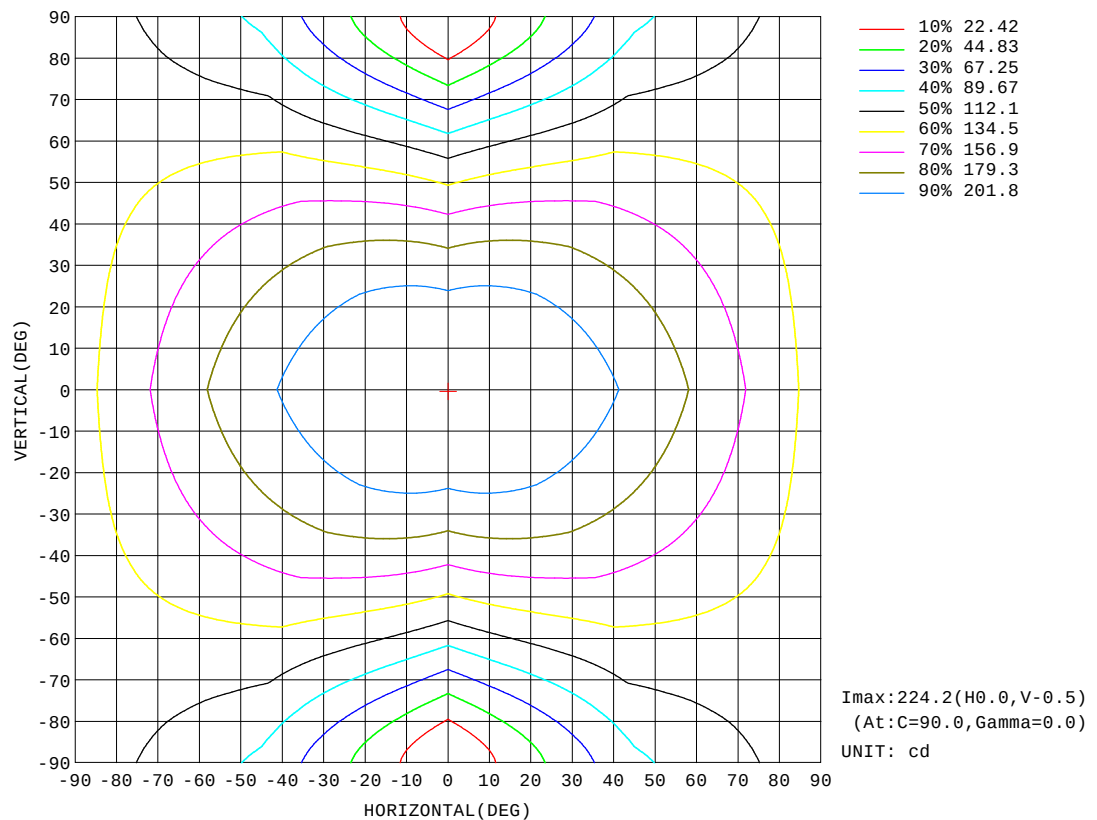


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-12-12

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

AAI Figure

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

Flux out:519.1 lm

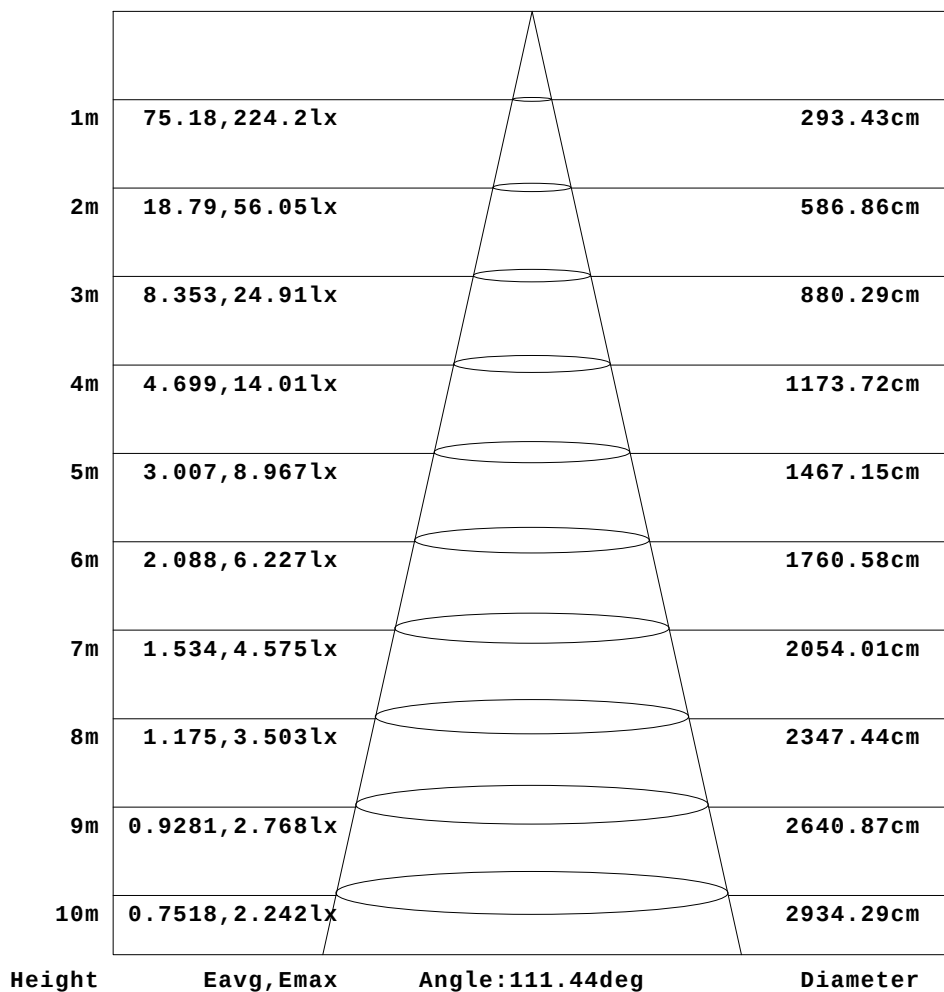


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-12

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

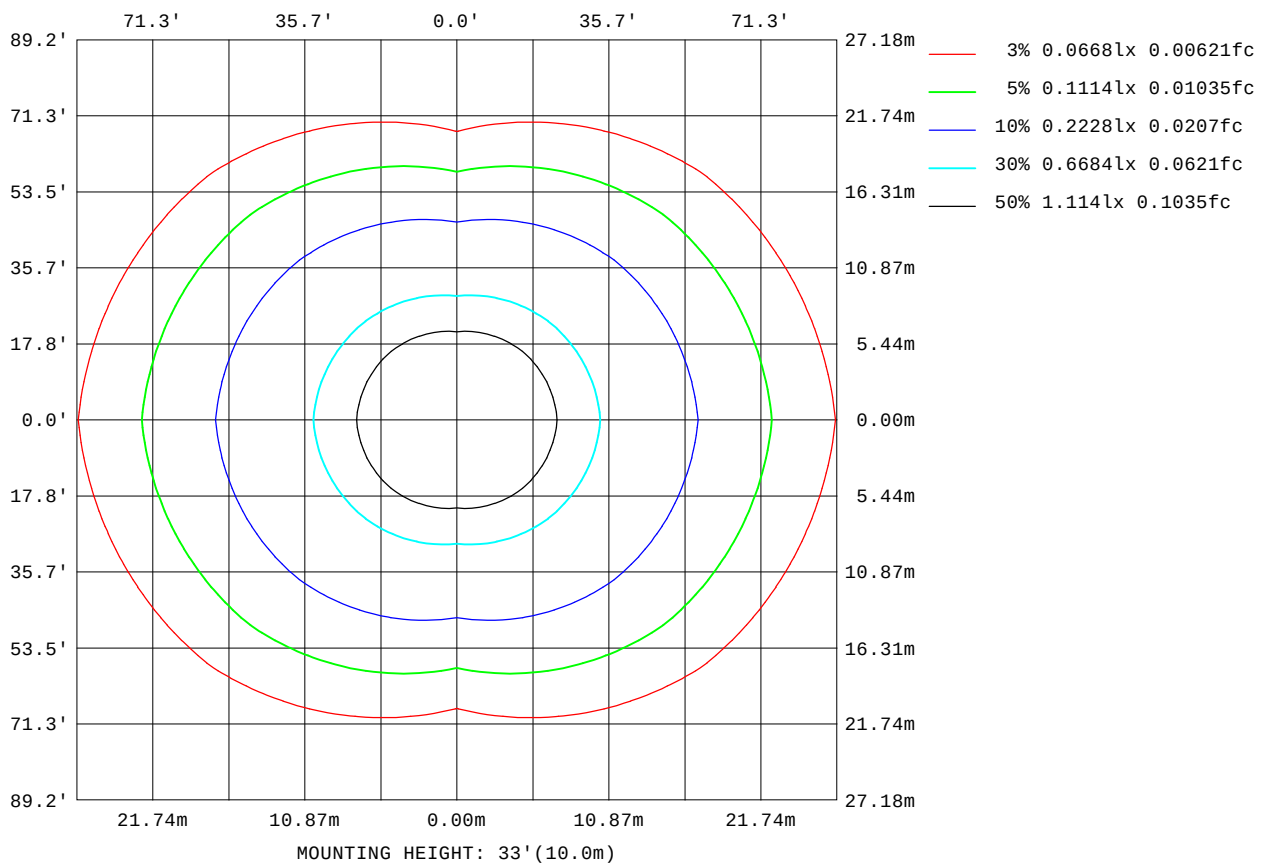

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-12-12

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	28882
L_0~180(75)av	42380
L_0~180(85)av	111363
L_90~270(65)av	13230
L_90~270(75)av	10820
L_90~270(85)av	5787
L_45(65)av	23287
L_45(75)av	32082
L_45(85)av	78267

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-12

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

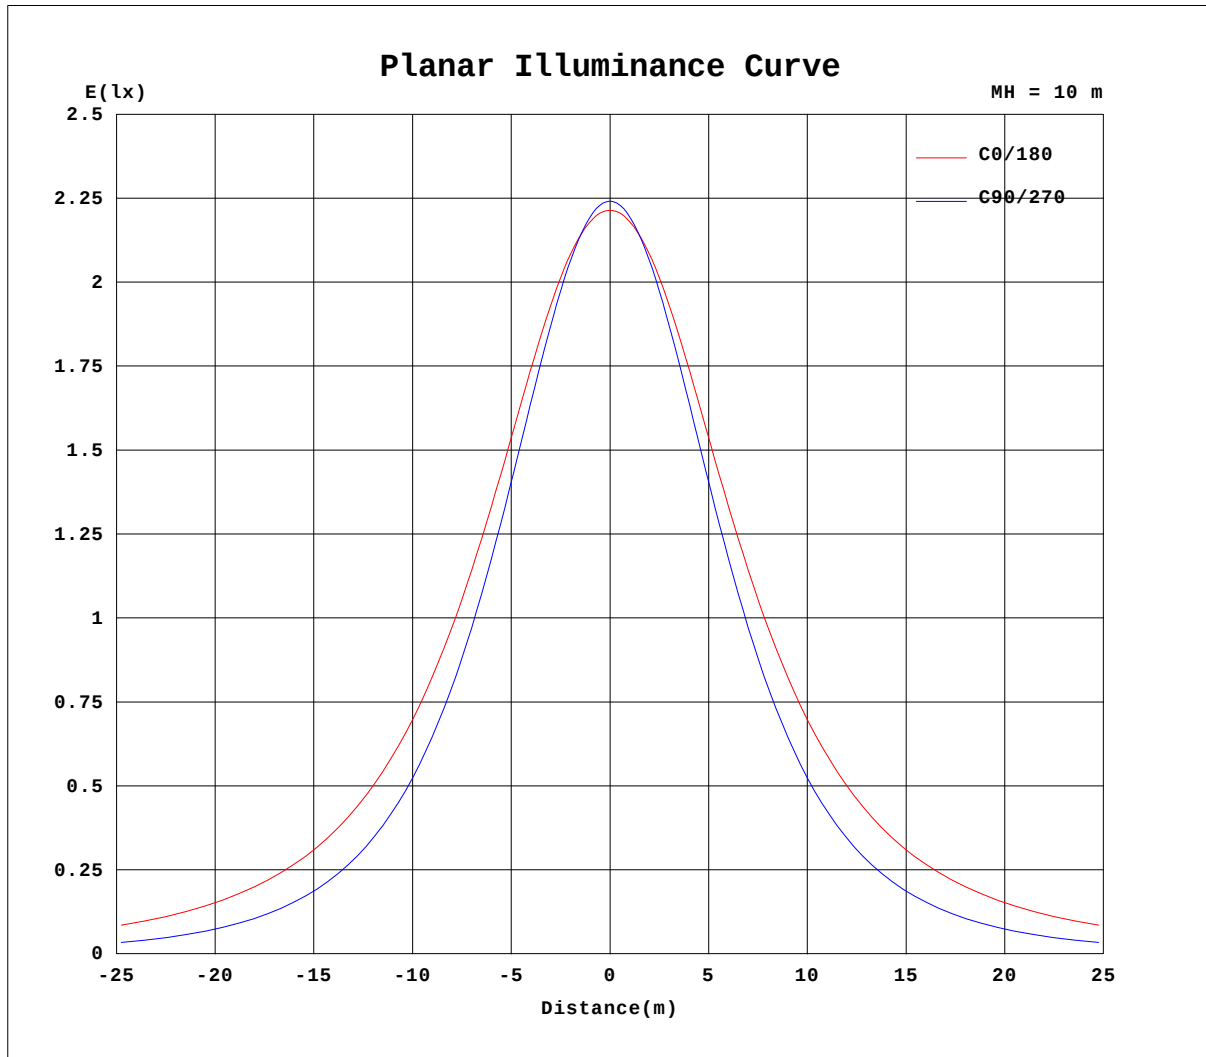

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-12-12

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.2520A P:12.09W PF:1.000 Freq:0Hz Lamp Flux:1165.81x1 lm		
NAME: VOM40CD600	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:23*600mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	221	224	224	224	221	224	224	224										
5	221	223	223	223	221	223	223	223										
10	221	222	220	222	221	222	220	222										
15	220	219	215	219	220	219	215	219										
20	219	215	208	215	219	215	208	215										
25	216	210	200	210	216	210	200	210										
30	212	203	189	203	212	203	189	203										
35	208	196	177	196	208	196	177	196										
40	203	187	163	187	203	187	163	187										
45	197	177	148	177	197	177	148	177										
50	191	168	132	168	191	168	132	168										
55	184	157	115	157	184	157	115	157										
60	176	147	96.3	147	176	147	96.3	147										
65	168	136	77.2	136	168	136	77.2	136										
70	160	125	57.7	125	160	125	57.7	125										
75	151	115	38.6	115	151	115	38.6	115										
80	142	104	21.0	104	142	104	21.0	104										
85	134	94.1	6.96	94.1	134	94.1	6.96	94.1										
90	125	85.4	0.72	85.4	125	85.4	0.72	85.4										
95	116	78.1	0.64	78.1	116	78.1	0.64	78.1										
100	107	71.5	0.71	71.5	107	71.5	0.71	71.5										
105	98.4	64.1	0.92	64.1	98.4	64.1	0.92	64.1										
110	91.2	59.3	1.29	59.3	91.2	59.3	1.29	59.3										
115	84.5	53.3	1.67	53.3	84.5	53.3	1.67	53.3										
120	77.5	45.5	1.99	45.5	77.5	45.5	1.99	45.5										
125	70.1	42.5	2.28	42.5	70.1	42.5	2.28	42.5										
130	62.3	37.6	2.49	37.6	62.3	37.6	2.49	37.6										
135	54.6	31.8	2.66	31.8	54.6	31.8	2.66	31.8										
140	47.0	26.4	2.75	26.4	47.0	26.4	2.75	26.4										
145	39.4	21.2	2.85	21.2	39.4	21.2	2.85	21.2										
150	32.1	16.1	2.91	16.1	32.1	16.1	2.91	16.1										
155	25.0	11.1	2.95	11.1	25.0	11.1	2.95	11.1										
160	17.4	7.20	2.97	7.20	17.4	7.20	2.97	7.20										
165	10.8	5.02	3.06	5.02	10.8	5.02	3.06	5.02										
170	4.66	4.20	3.26	4.20	4.66	4.20	3.26	4.20										
175	3.55	3.70	3.58	3.70	3.55	3.70	3.58	3.70										
180	3.28	3.60	3.85	3.60	3.28	3.60	3.85	3.60										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-12

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: