


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 77.10 lm/W			
MODEL		I _{max} (cd)	871.3	S/MH(C0/180)	0.96
NOMINAL POWER(W)	20.64	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	1591.4	h UP, DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	1591.43	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	48	h down(%)	100.0	CIBSE SHR MAX	1.15

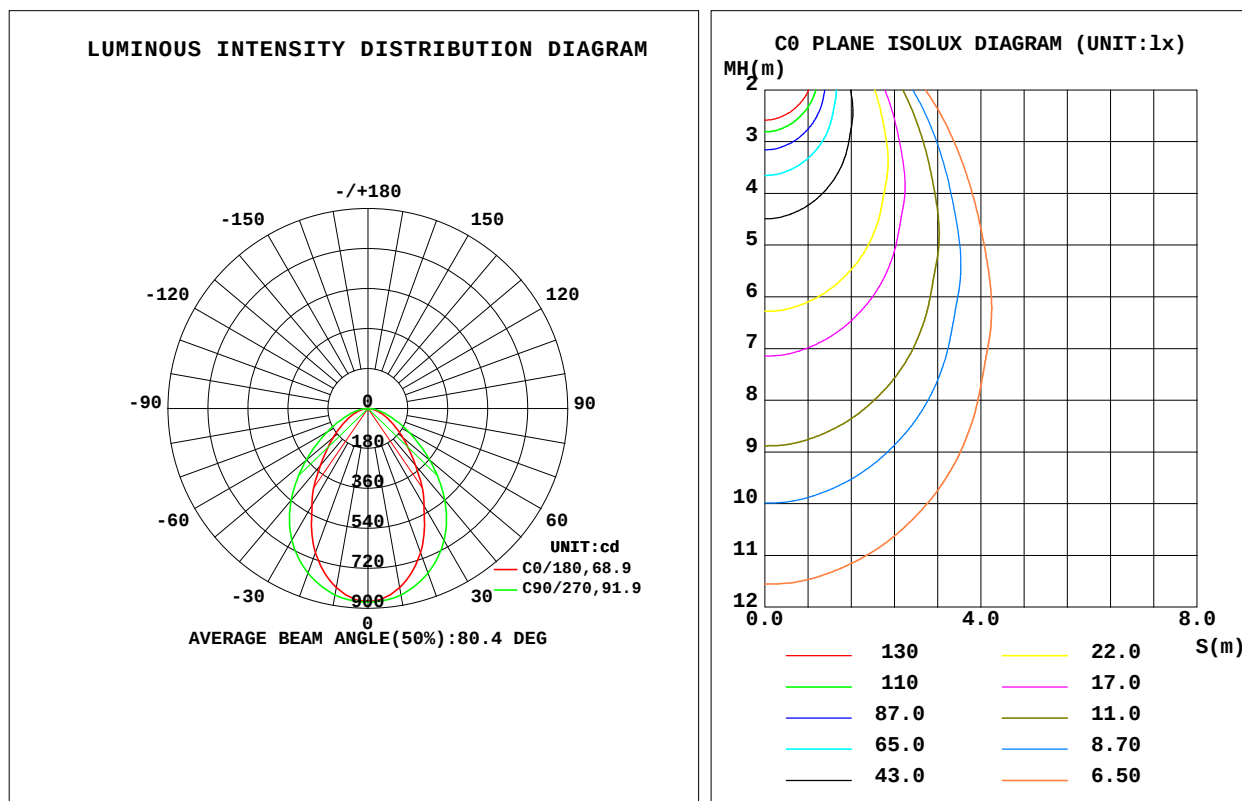

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2023-02-22

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	818.9	835.6	852.7	835.6	818.9	835.6	852.7	835.6	0- 10	81.42	81.42	5.12, 5.12
20	691.3	735.6	788.7	735.6	691.3	735.6	788.7	735.6	10- 20	222.9	304.3	19.1, 19.1
30	505.6	587.1	685.8	587.1	505.6	587.1	685.8	587.1	20- 30	306.9	611.2	38.4, 38.4
40	332.1	420.3	538.1	420.3	332.1	420.3	538.1	420.3	30- 40	318.2	929.4	58.4, 58.4
50	206.5	270.8	364.3	270.8	206.5	270.8	364.3	270.8	40- 50	270.2	1200	75.4, 75.4
60	120.3	161.7	213.2	161.7	120.3	161.7	213.2	161.7	50- 60	194.5	1394	87.6, 87.6
70	62.14	86.69	106.4	86.69	62.14	86.69	106.4	86.69	60- 70	120.8	1515	95.2, 95.2
80	22.66	33.70	40.81	33.70	22.66	33.70	40.81	33.70	70- 80	60.49	1575	99, 99
90	0	0	0	0	0	0	0	0	80- 90	16.08	1591	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	1591	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	1591	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	1591	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	1591	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	1591	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	1591	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	1591	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	1591	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	1591	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2023-02-22

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

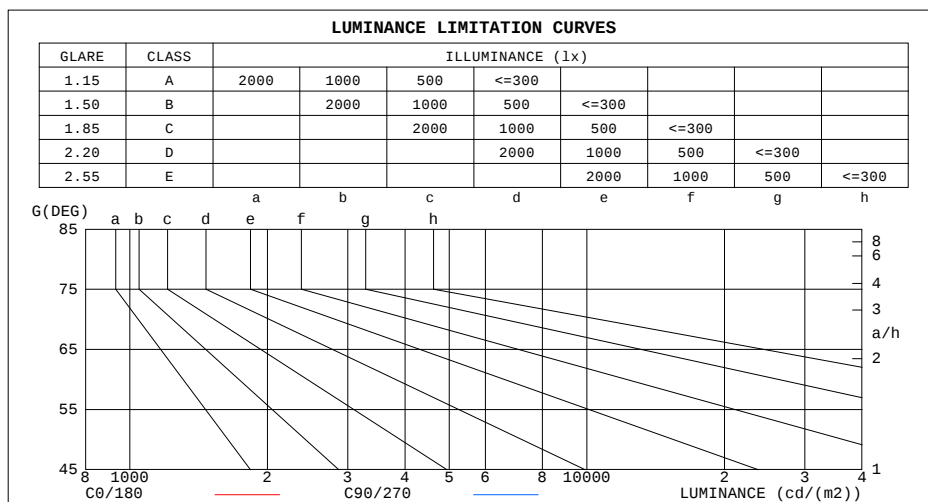

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	39461	74140
80	49420	89029
75	59530	102520
70	68819	117791
65	79224	137285
60	91111	161501
55	104998	187473
50	121715	214660
45	140519	242044


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2023-02-22

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

r _{CC}	80%			70%			50%			30%			10%			0
r _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.03	.99	1.04	1.01	.98	.90	.97	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.67	.62	.71	.65	.61	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.61	.55	.66	.60	.54	.64	.59	.54	.63	.57	.53	.51
6.0	.63	.55	.49	.62	.55	.49	.61	.54	.49	.59	.53	.48	.57	.52	.48	.46
7.0	.58	.50	.44	.57	.50	.44	.56	.49	.44	.54	.48	.44	.53	.48	.43	.41
8.0	.53	.46	.40	.53	.45	.40	.51	.45	.40	.50	.44	.40	.49	.44	.39	.38
9.0	.49	.42	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.46	.40	.36	.34
10.0	.46	.39	.34	.45	.38	.34	.44	.38	.33	.44	.38	.33	.43	.37	.33	.32

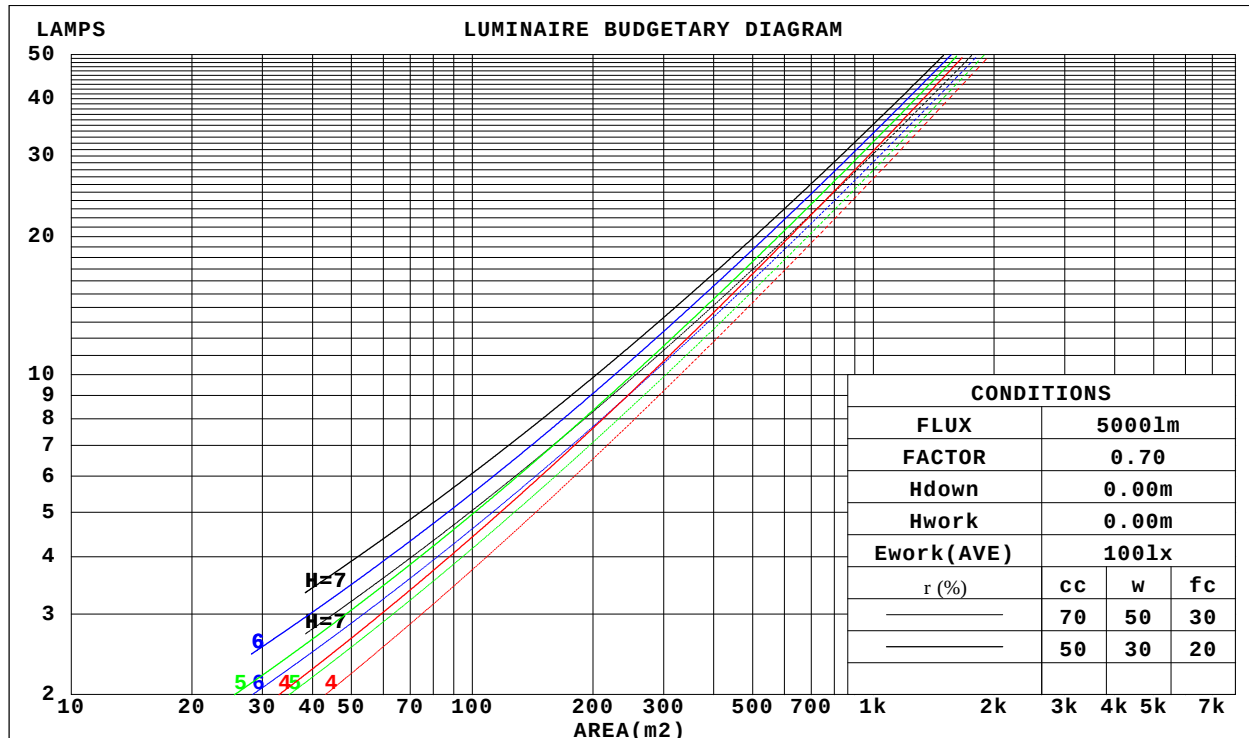

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2023-02-22

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:



WEC AND CCEC

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm					
NAME: VOM40FP1200			TYPE:		WEIGHT:
SPEC.:			DIM.: 1200*22mm		SERIAL No.:
MFR.:			SUR.:1200*22mm		Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.262	.149	.047	.255	.145	.046	.242	.139	.044	.230	.133	.043	.219	.127	.041	
2.0	.250	.137	.042	.244	.134	.041	.233	.129	.040	.222	.125	.039	.212	.120	.038	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.202	.112	.035	
4.0	.219	.114	.033	.215	.112	.033	.206	.109	.033	.198	.106	.032	.190	.103	.031	
5.0	.205	.104	.030	.201	.103	.030	.193	.101	.030	.186	.098	.029	.179	.096	.029	
6.0	.192	.096	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	.169	.089	.026	
7.0	.180	.089	.025	.177	.088	.025	.171	.086	.025	.165	.085	.025	.160	.083	.024	
8.0	.170	.083	.023	.167	.082	.023	.161	.081	.023	.156	.079	.023	.151	.078	.023	
9.0	.160	.077	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	.143	.073	.021	
10.0	.151	.073	.020	.149	.072	.020	.145	.071	.020	.140	.070	.020	.136	.069	.020	

r _{CC}	80%			70%			50%			30%			10%			0
r _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.151	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.167	.132	.103	.143	.114	.089	.098	.079	.062	.056	.046	.036	.018	.015	.012	
3.0	.158	.114	.079	.135	.098	.069	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.149	.100	.063	.128	.087	.055	.088	.060	.038	.051	.035	.023	.016	.012	.007	
5.0	.142	.090	.051	.122	.077	.044	.084	.054	.031	.049	.032	.019	.016	.010	.006	
6.0	.135	.081	.042	.116	.070	.037	.080	.049	.026	.046	.029	.015	.015	.009	.005	
7.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.117	.063	.027	.100	.055	.023	.070	.038	.017	.041	.023	.010	.013	.007	.003	
10.0	.111	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-02-22

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm											
NAME: VOM40FP1200						TYPE:			WEIGHT:		
SPEC.:						DIM.: 1200*22mm			SERIAL No.:		
MFR.:						SUR.:1200*22mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	26.7	28.0	26.9	28.2	28.4	28.8	30.1	29.1	30.3	30.5
	3H	27.4	28.6	27.7	28.9	29.1	29.7	31.0	30.0	31.2	31.4
	4H	27.7	28.9	28.0	29.1	29.3	30.1	31.2	30.4	31.5	31.7
	6H	27.8	28.9	28.2	29.2	29.5	30.3	31.4	30.6	31.7	31.9
	8H	27.9	28.9	28.2	29.2	29.5	30.4	31.4	30.7	31.7	32.0
	12H	27.9	28.9	28.2	29.2	29.5	30.4	31.4	30.8	31.7	32.0
4H	2H	27.2	28.4	27.5	28.7	28.9	29.0	30.2	29.3	30.4	30.7
	3H	28.2	29.2	28.5	29.5	29.8	30.1	31.1	30.4	31.4	31.7
	4H	28.6	29.5	28.9	29.8	30.1	30.6	31.5	30.9	31.8	32.1
	6H	28.8	29.6	29.2	30.0	30.3	30.9	31.7	31.3	32.1	32.4
	8H	28.9	29.6	29.3	30.0	30.4	31.0	31.8	31.4	32.2	32.5
	12H	28.9	29.6	29.3	30.0	30.4	31.1	31.8	31.5	32.2	32.6
8H	4H	28.8	29.6	29.2	29.9	30.3	30.6	31.4	31.0	31.8	32.1
	6H	29.2	29.8	29.6	30.2	30.6	31.1	31.7	31.5	32.1	32.6
	8H	29.3	29.9	29.8	30.3	30.7	31.3	31.9	31.7	32.3	32.7
	12H	29.4	29.9	29.9	30.3	30.8	31.4	31.9	31.9	32.4	32.8
12H	4H	28.8	29.5	29.2	29.9	30.3	30.6	31.3	31.0	31.7	32.1
	6H	29.2	29.8	29.7	30.2	30.7	31.1	31.7	31.6	32.1	32.5
	8H	29.4	29.9	29.9	30.3	30.8	31.3	31.8	31.8	32.2	32.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.5 / - 0.6					+ 0.3 / - 0.3					
1.5H	+ 0.2 / - 0.5					+ 0.3 / - 0.5					
2.0H	+ 0.5 / - 1.0					+ 0.9 / - 0.9					

CIE Pub.117, 1591 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.6)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-02-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	66	55	49	65	55	49	64	55	49	43
0.80	75	65	59	74	65	59	73	64	58	52
1.00	83	74	67	82	73	67	80	74	67	61
1.25	89	81	75	88	80	74	86	79	74	67
1.50	94	86	80	92	85	79	90	83	78	72
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	105	100	95	103	98	94	100	95	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-02-22

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

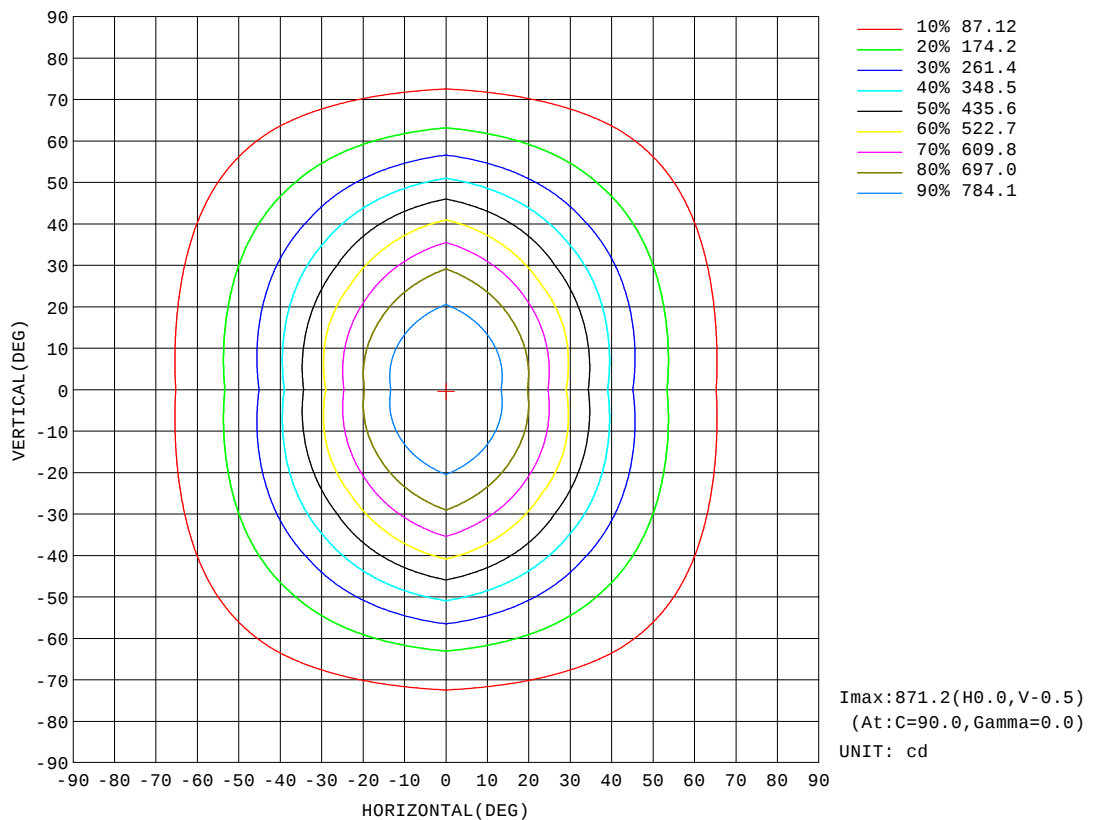


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2023-02-22

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

Flux out:929.4 lm

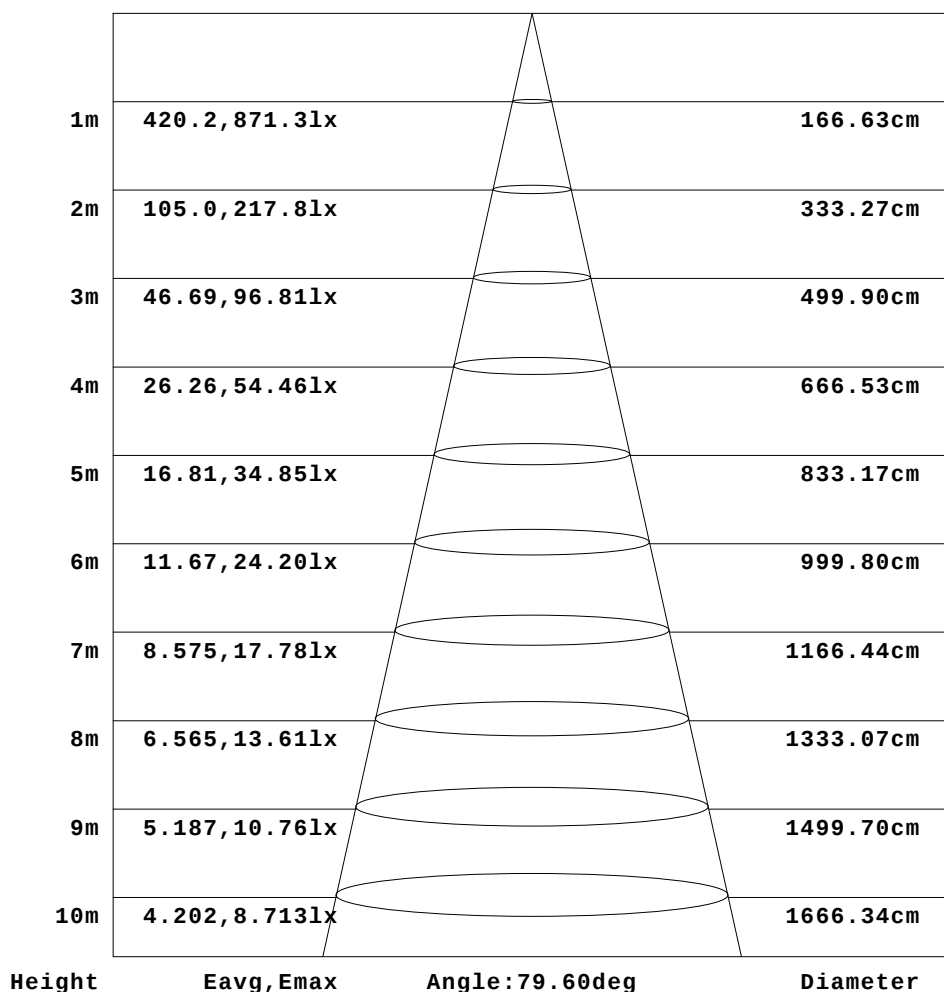


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2023-02-22

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

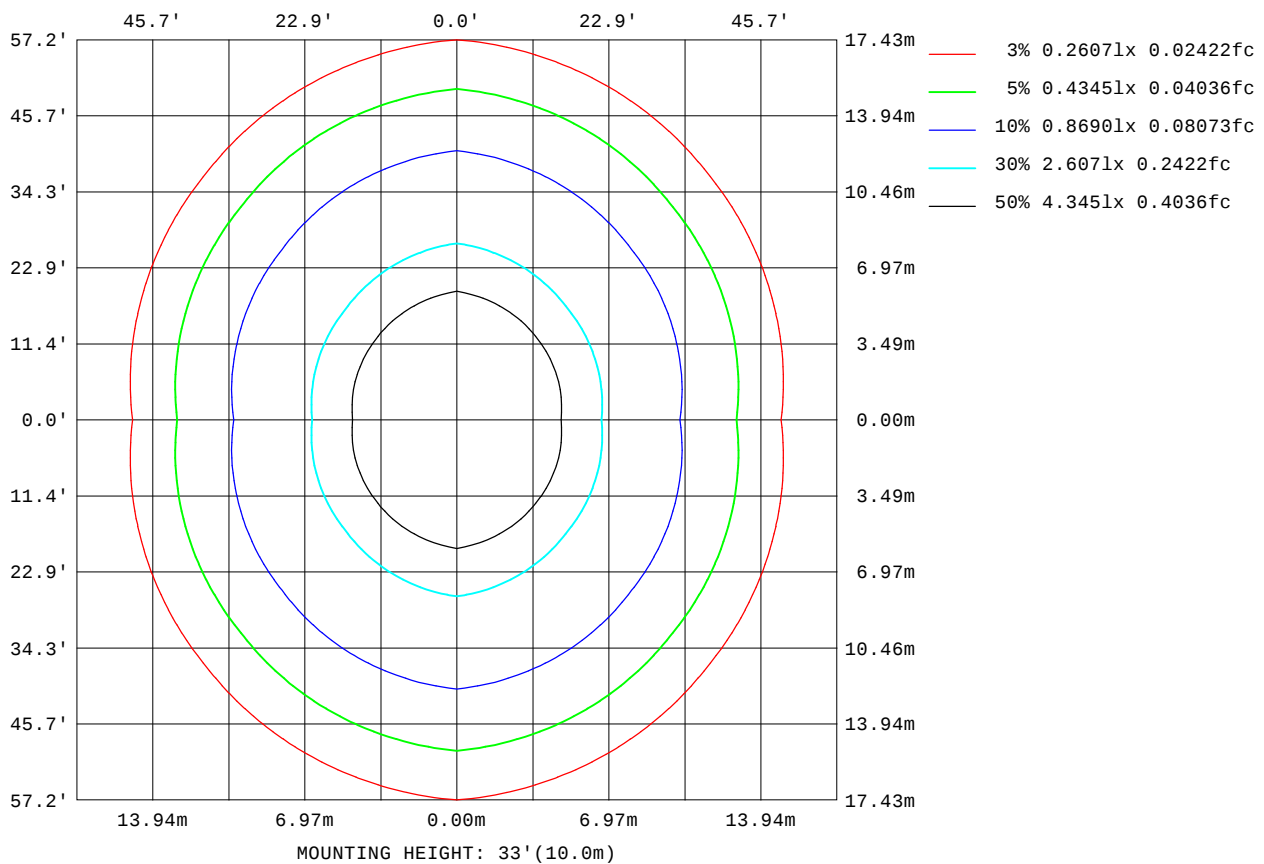

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2023-02-22

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	79224
L_0~180(75)av	59530
L_0~180(85)av	39461
L_90~270(65)av	137285
L_90~270(75)av	102520
L_90~270(85)av	74140
L_45(65)av	108341
L_45(75)av	84406
L_45(85)av	60892

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-02-22

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

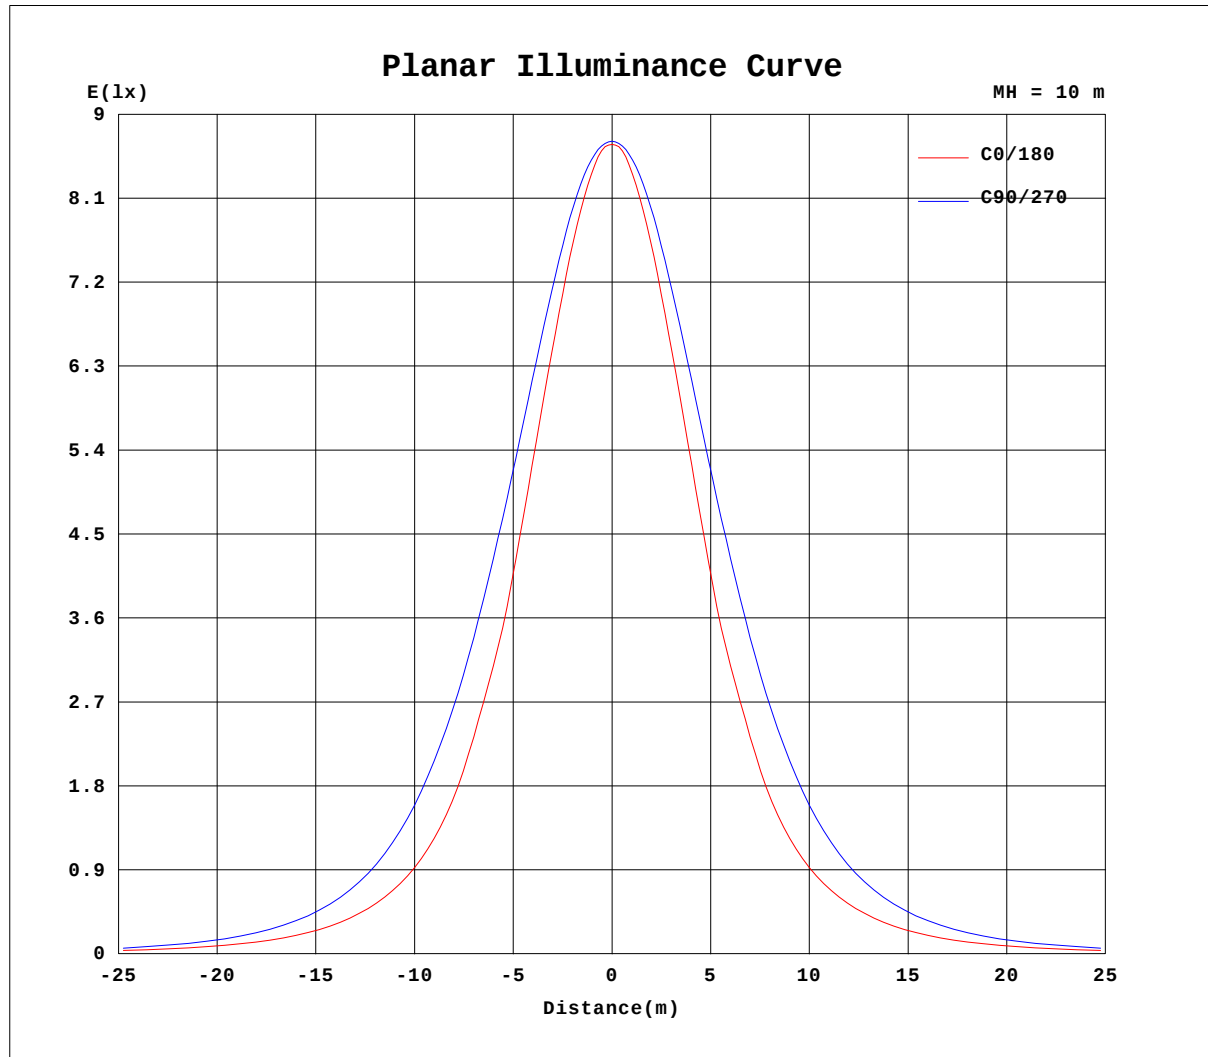

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2023-02-22

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.4300A P:20.64W PF:1.000 Freq:0Hz Lamp Flux:1591.43x1 lm		
NAME: VOM40FP1200	TYPE:	WEIGHT:
SPEC.:	DIM.: 1200*22mm	SERIAL No.:
MFR.:	SUR.:1200*22mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315									
0	868	869	871	869	868	869	871	869									
5	856	862	867	862	856	862	867	862									
10	819	836	853	836	819	836	853	836									
15	762	794	826	794	762	794	826	794									
20	691	736	789	736	691	736	789	736									
25	602	667	742	667	602	667	742	667									
30	506	587	686	587	506	587	686	587									
35	424	500	617	500	424	500	617	500									
40	332	420	538	420	332	420	538	420									
45	262	343	452	343	262	343	452	343									
50	207	271	364	271	207	271	364	271									
55	159	211	284	211	159	211	284	211									
60	120	162	213	162	120	162	213	162									
65	88.4	121	153	121	88.4	121	153	121									
70	62.1	86.7	106	86.7	62.1	86.7	106	86.7									
75	40.7	57.7	70.1	57.7	40.7	57.7	70.1	57.7									
80	22.7	33.7	40.8	33.7	22.7	33.7	40.8	33.7									
85	9.08	14.0	17.1	14.0	9.08	14.0	17.1	14.0									
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-02-22

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: