


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.12 lm/W			
MODEL		I _{max} (cd)	743.4	S/MH(C0/180)	0.29
NOMINAL POWER(W)	2.8	LOR(%)	100.0	S/MH(C90/270)	0.29
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	131.94	h UP, DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	131.939	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	48	h down(%)	100.0	CIBSE SHR MAX	1.00

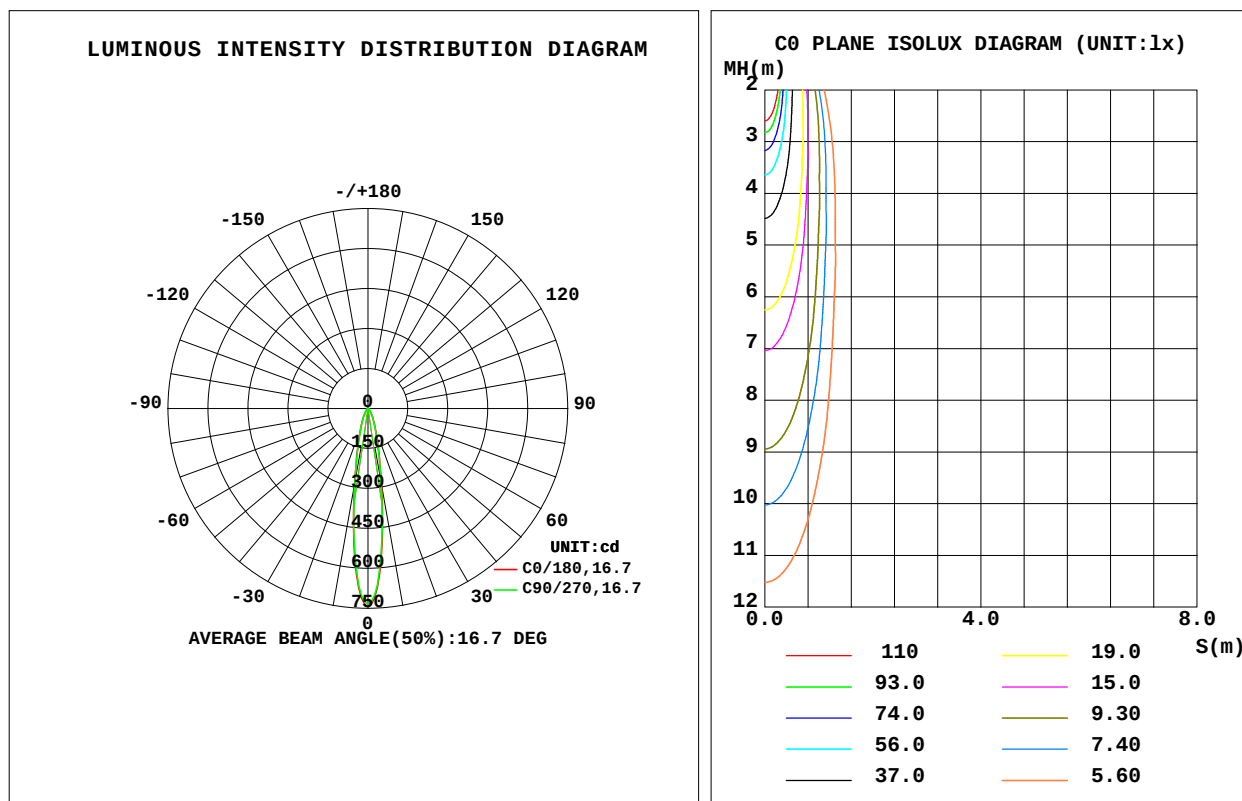

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:



ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	291.7	288.6	287.4	288.6	291.7	288.6	287.4	288.6	0- 10	44.44	44.44	33.7, 33.7
20	84.10	83.24	82.77	83.24	84.10	83.24	82.77	83.24	10- 20	42.26	86.70	65.7, 65.7
30	29.40	29.25	29.26	29.25	29.40	29.25	29.26	29.25	20- 30	23.13	109.8	83.2, 83.2
40	11.33	11.38	11.38	11.38	11.33	11.38	11.38	11.38	30- 40	11.56	121.4	92, 92
50	4.772	4.827	4.853	4.827	4.772	4.827	4.853	4.827	40- 50	5.808	127.2	96.4, 96.4
60	2.052	2.137	2.144	2.137	2.052	2.137	2.144	2.137	50- 60	2.937	130.1	98.6, 98.6
70	0.7613	0.8092	0.8329	0.8092	0.7613	0.8092	0.8329	0.8092	60- 70	1.404	131.5	99.7, 99.7
80	0.0470	0.0572	0.0707	0.0572	0.0470	0.0572	0.0707	0.0572	70- 80	0.3900	131.9	100, 100
90	0	0	0	0	0	0	0	0	80- 90	0.0105	131.9	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	131.9	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	131.9	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	131.9	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	131.9	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	131.9	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	131.9	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	131.9	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	131.9	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	131.9	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

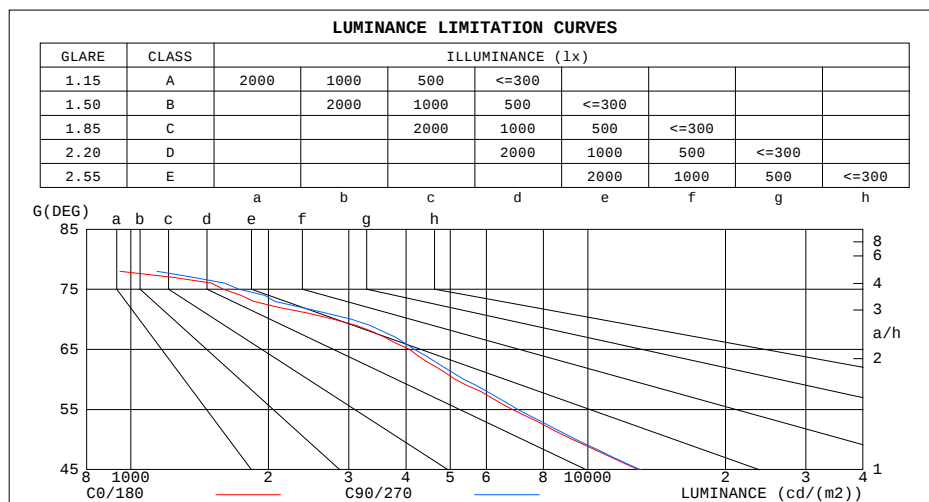

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1	49
80	339	509
75	1594	1724
70	2782	3044
65	4076	4171
60	5129	5360
55	6848	7041
50	9279	9438
45	12925	13057


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

r _{CC}	80%			70%			50%			30%			10%			0
r _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
6.0	.87	.83	.79	.87	.82	.79	.85	.81	.78	.84	.80	.78	.83	.80	.77	.76
7.0	.84	.79	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.80	.77	.74	.73
8.0	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.78	.74	.72	.71
9.0	.78	.73	.70	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.70	.68
10.0	.76	.71	.68	.75	.71	.68	.74	.70	.68	.74	.70	.68	.73	.70	.67	.66

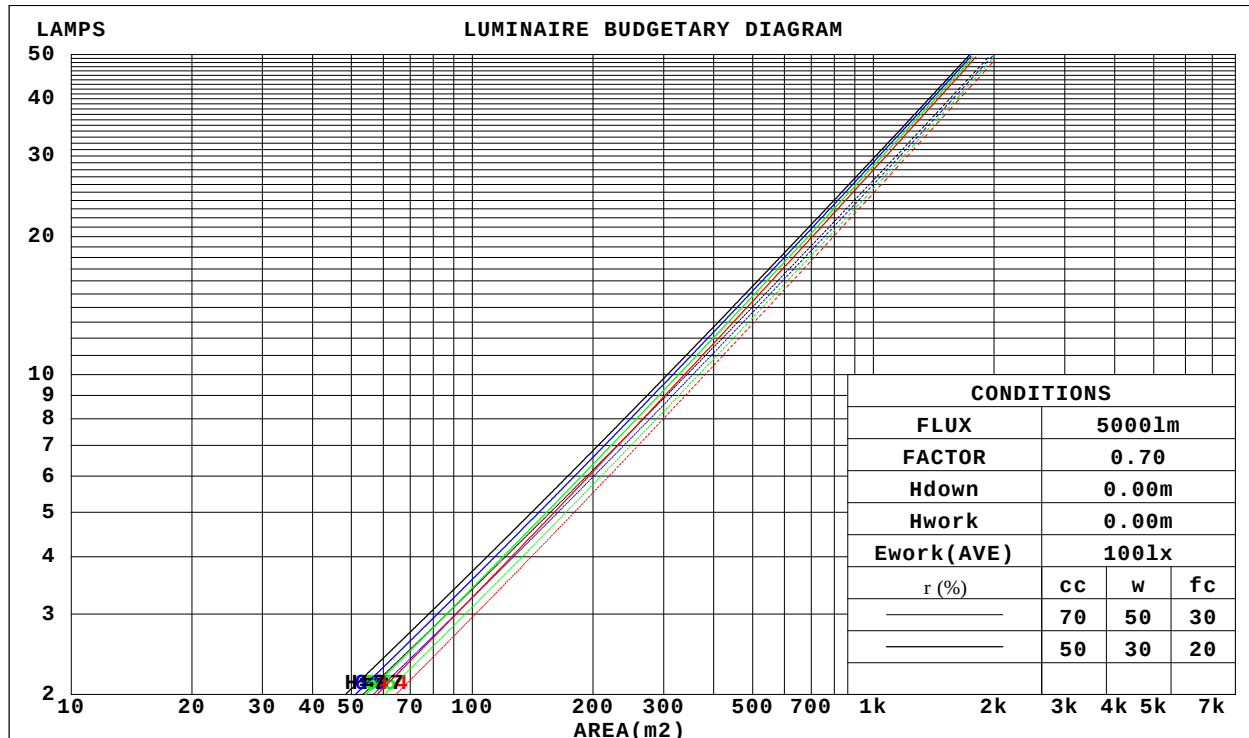

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2022-12-20

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:



WEC AND CCEC

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm					
NAME: VOR40S29			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:29*29mm		Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.154	.088	.028	.147	.084	.027	.135	.077	.025	.123	.071	.023	.113	.065	.021	
2.0	.145	.080	.024	.140	.077	.024	.129	.072	.022	.120	.067	.021	.111	.063	.020	
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.059	.018	
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.019	.110	.059	.018	.104	.056	.017	
5.0	.121	.062	.018	.118	.060	.018	.111	.058	.017	.105	.055	.017	.100	.053	.016	
6.0	.114	.057	.016	.111	.056	.016	.106	.054	.016	.101	.052	.015	.096	.050	.015	
7.0	.108	.054	.015	.106	.053	.015	.101	.051	.015	.096	.049	.014	.092	.048	.014	
8.0	.103	.050	.014	.101	.050	.014	.096	.048	.014	.092	.047	.014	.089	.046	.013	
9.0	.098	.047	.013	.096	.047	.013	.092	.046	.013	.089	.044	.013	.085	.043	.013	
10.0	.094	.045	.012	.092	.044	.012	.089	.043	.012	.085	.042	.012	.082	.041	.012	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.076	.053	.093	.066	.047	.064	.046	.033	.037	.027	.020	.012	.009	.006	
7.0	.101	.068	.046	.087	.059	.040	.060	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.095	.062	.039	.082	.054	.034	.056	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.089	.056	.034	.077	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004	
10.0	.084	.052	.030	.073	.045	.026	.050	.032	.019	.029	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm											
NAME: VOR40S29					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:29*29mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	21.9	22.6	22.1	22.8	23.0	21.9	22.7	22.2	22.9	23.0
	3H	22.1	22.8	22.3	23.0	23.1	22.1	22.8	22.4	23.0	23.2
	4H	22.0	22.7	22.3	22.9	23.1	22.1	22.8	22.4	23.0	23.2
	6H	22.0	22.6	22.3	22.8	23.1	22.1	22.7	22.3	22.9	23.2
	8H	21.9	22.5	22.2	22.8	23.0	22.0	22.6	22.3	22.9	23.1
	12H	21.9	22.5	22.2	22.7	23.0	22.0	22.6	22.3	22.8	23.1
4H	2H	21.9	22.6	22.2	22.8	23.0	22.0	22.7	22.3	22.9	23.1
	3H	22.2	22.8	22.5	23.0	23.3	22.2	22.8	22.6	23.1	23.4
	4H	22.2	22.7	22.5	23.0	23.3	22.2	22.8	22.6	23.1	23.4
	6H	22.1	22.6	22.4	22.9	23.2	22.2	22.6	22.5	23.0	23.3
	8H	22.0	22.5	22.4	22.8	23.2	22.1	22.6	22.5	22.9	23.3
	12H	22.0	22.4	22.4	22.7	23.1	22.1	22.5	22.5	22.8	23.2
8H	4H	22.1	22.5	22.4	22.8	23.2	22.1	22.6	22.5	22.9	23.3
	6H	22.0	22.3	22.4	22.7	23.1	22.1	22.4	22.5	22.8	23.2
	8H	21.9	22.2	22.4	22.7	23.1	22.0	22.3	22.4	22.7	23.2
	12H	21.9	22.1	22.3	22.6	23.0	21.9	22.2	22.4	22.7	23.1
12H	4H	22.0	22.4	22.4	22.8	23.2	22.1	22.5	22.5	22.9	23.2
	6H	21.9	22.2	22.4	22.7	23.1	22.0	22.3	22.4	22.7	23.2
	8H	21.9	22.1	22.3	22.6	23.0	21.9	22.2	22.4	22.7	23.1
Variations with the observer position at spacings:											
S = 1.0H		+ 1.5 / - 2.4					+ 1.5 / - 2.3				
1.5H		+ 2.3 / - 1.7					+ 2.2 / - 1.7				
2.0H		+ 2.6 / - 2.1					+ 2.6 / - 2.1				

CIE Pub.117, 131.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	103	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

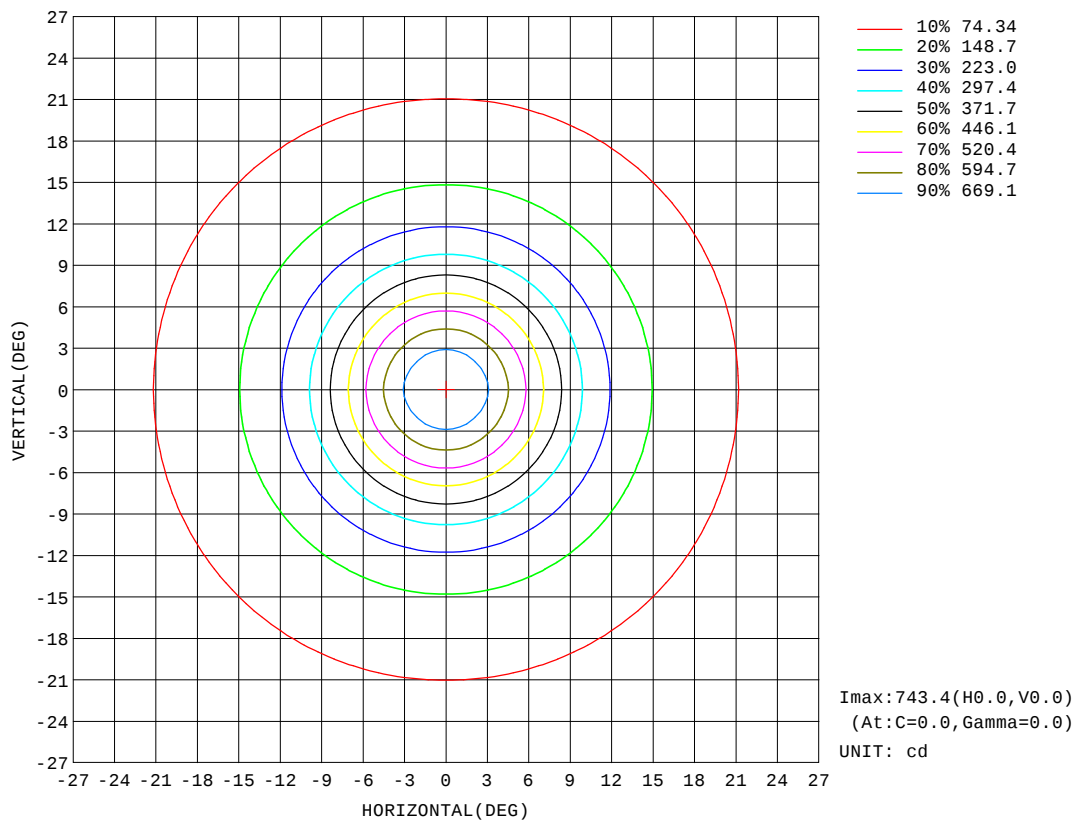


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

Flux out:38.79 lm

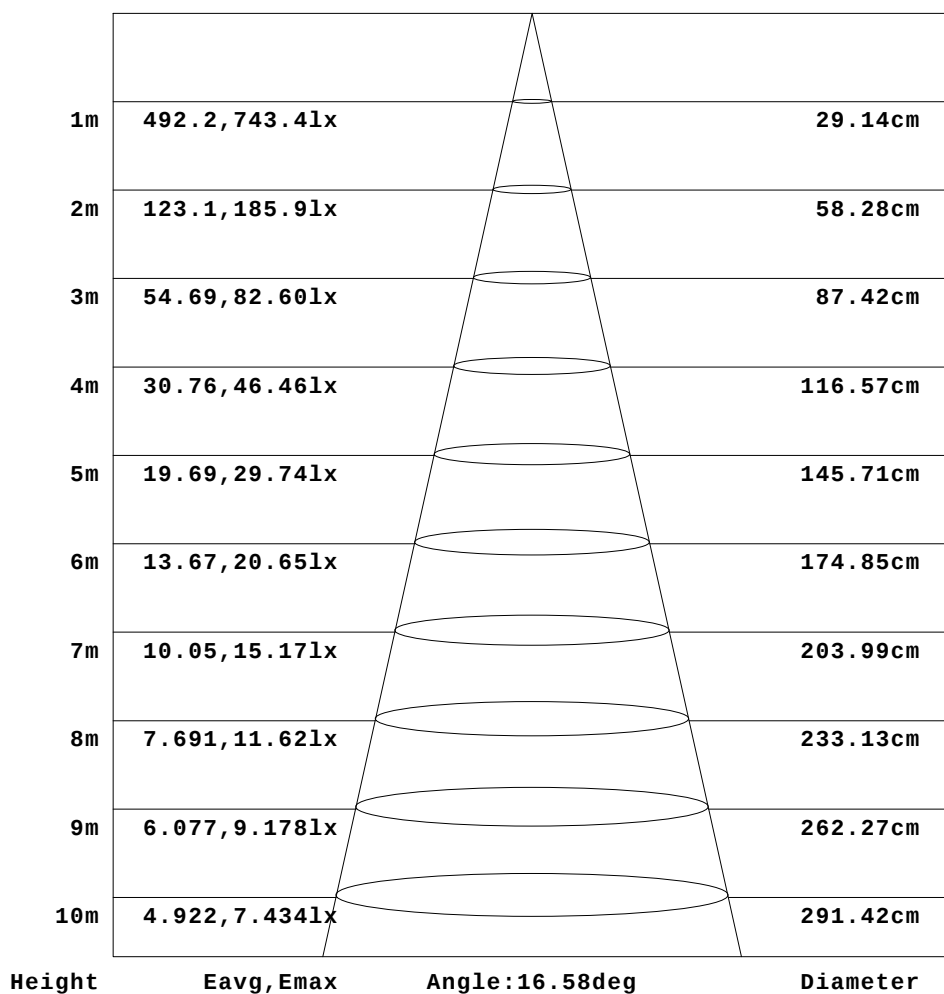


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

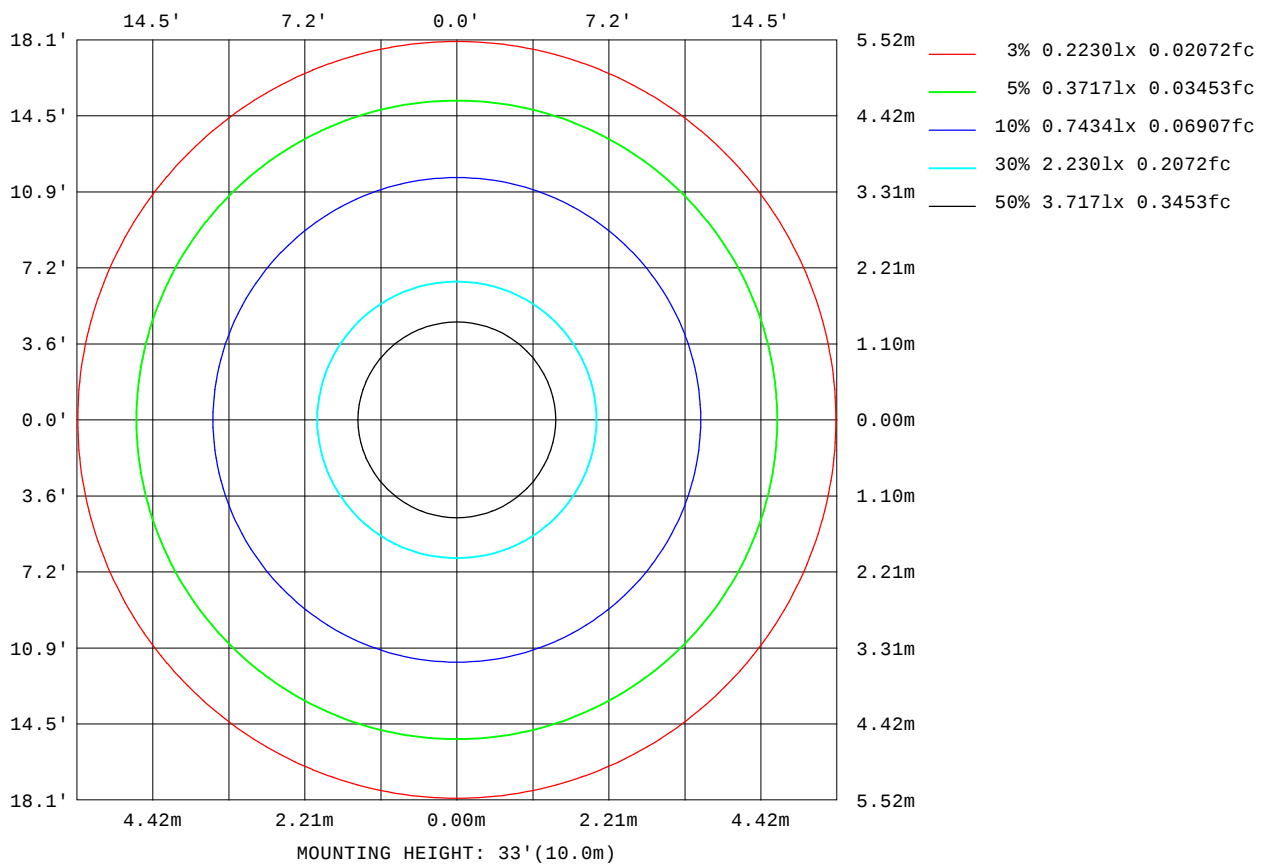

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4076
L_0~180(75)av	1594
L_0~180(85)av	1
L_90~270(65)av	4171
L_90~270(75)av	1724
L_90~270(85)av	49
L_45(65)av	4172
L_45(75)av	1742
L_45(85)av	74

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

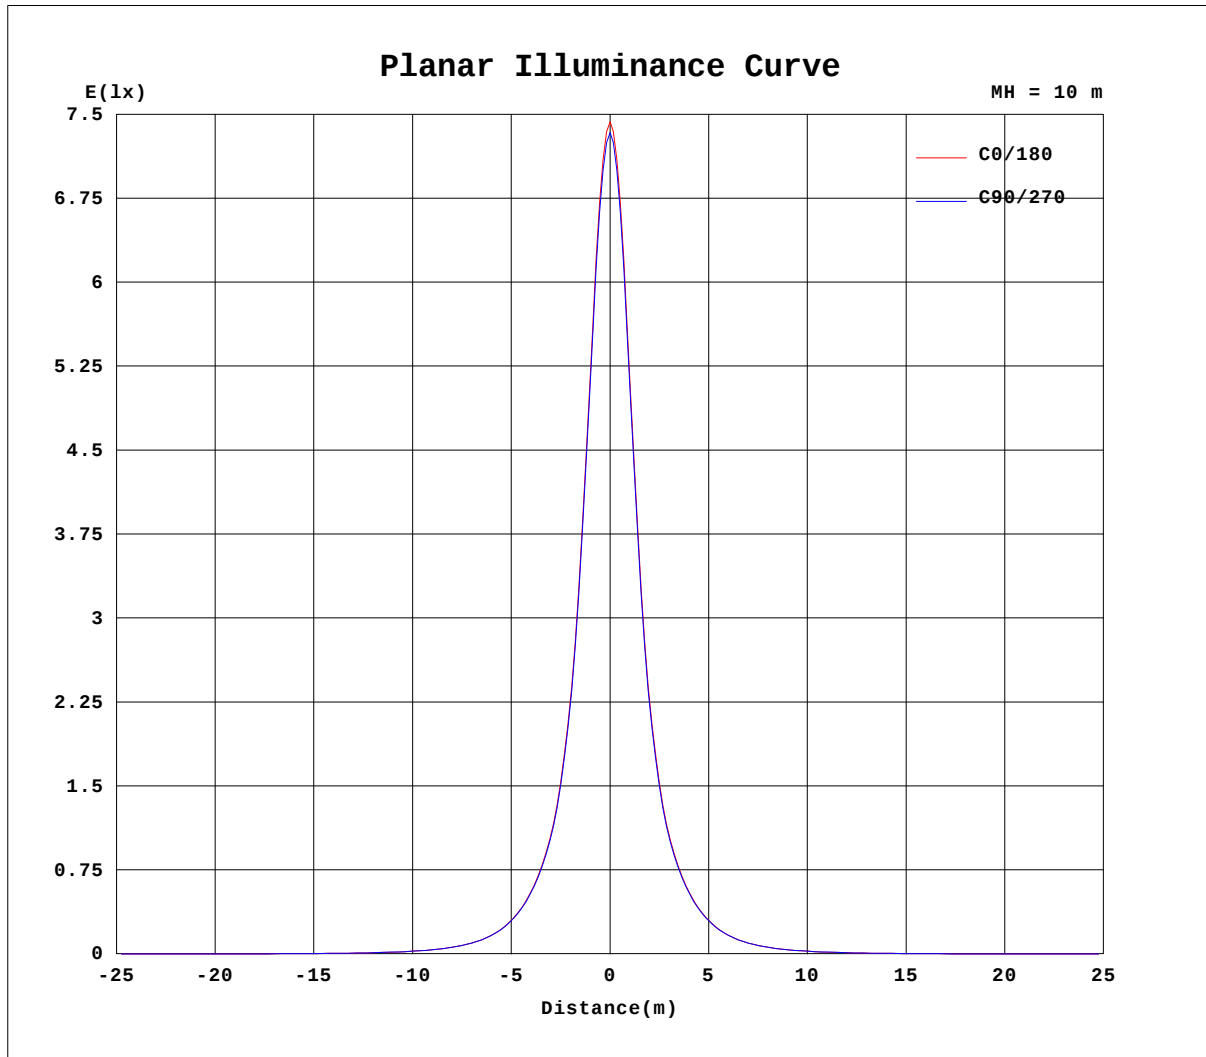

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-12-20

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.0580A P:2.800W PF:1.000 Freq:0Hz Lamp Flux:131.939x1 lm		
NAME: VOR40S29	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:29*29mm	Shielding Angle:

Table--1

UNIT: cd

C(DEC) g (DEC)	0	45	90	135	180	225	270	315									
0	743	735	734	735	743	735	734	735									
5	568	562	561	562	568	562	561	562									
10	292	289	287	289	292	289	287	289									
15	147	145	145	145	147	145	145	145									
20	84.1	83.2	82.8	83.2	84.1	83.2	82.8	83.2									
25	49.6	49.2	49.0	49.2	49.6	49.2	49.0	49.2									
30	29.4	29.2	29.3	29.2	29.4	29.2	29.3	29.2									
35	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0									
40	11.3	11.4	11.4	11.4	11.3	11.4	11.4	11.4									
45	7.31	7.33	7.39	7.33	7.31	7.33	7.39	7.33									
50	4.77	4.83	4.85	4.83	4.77	4.83	4.85	4.83									
55	3.14	3.22	3.23	3.22	3.14	3.22	3.23	3.22									
60	2.05	2.14	2.14	2.14	2.05	2.14	2.14	2.14									
65	1.38	1.41	1.41	1.41	1.38	1.41	1.41	1.41									
70	0.76	0.81	0.83	0.81	0.76	0.81	0.83	0.81									
75	0.33	0.36	0.36	0.36	0.33	0.36	0.36	0.36									
80	0.05	0.06	0.07	0.06	0.05	0.06	0.07	0.06									
85	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01									
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00									

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-20

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: