


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 41.91 lm/W			
MODEL		I _{max} (cd)	133.3	S/MH(C0/180)	1.26
NOMINAL POWER(W)	9.1	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	381.40	h UP, DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	381.396	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	48	h down(%)	100.0	CIBSE SHR MAX	1.35

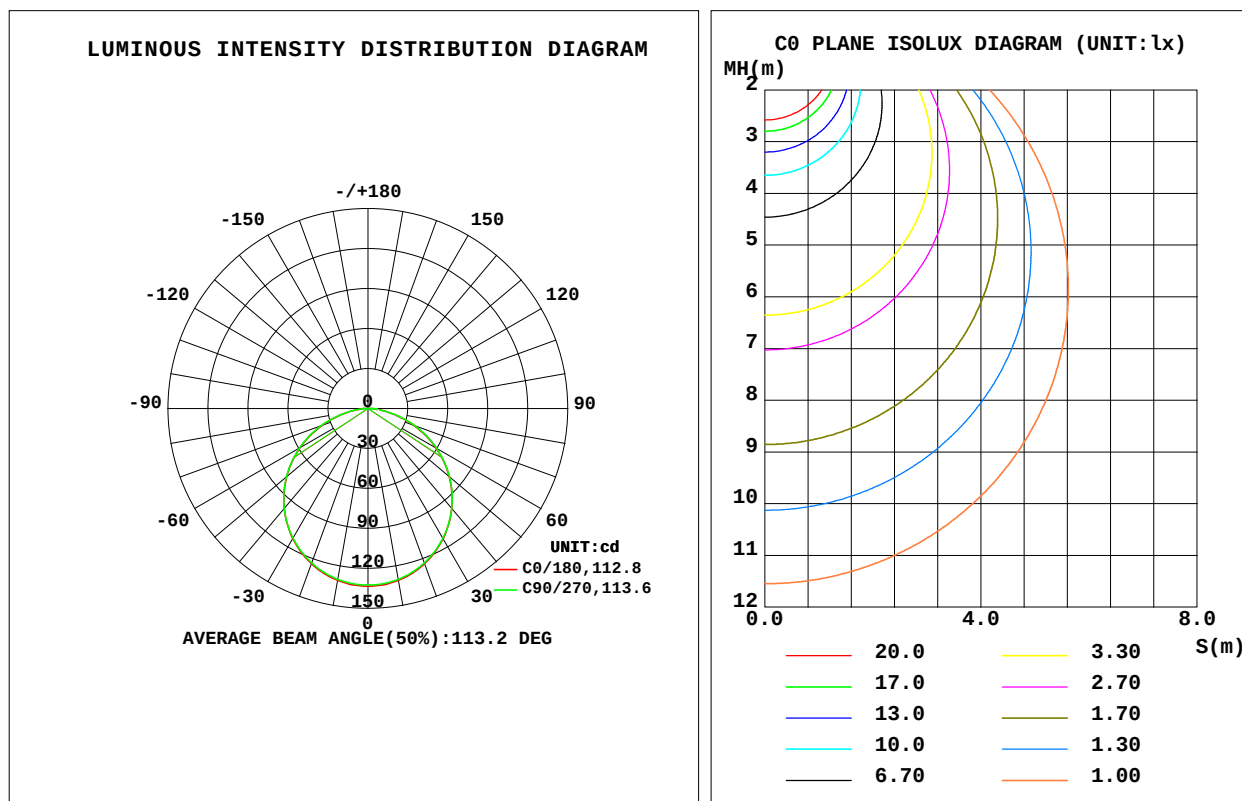

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	131.0	130.3	130.2	130.3	131.0	130.3	130.2	130.3	0- 10	12.56	12.56	3.29, 3.29
20	124.0	123.5	123.4	123.5	124.0	123.5	123.4	123.5	10- 20	36.00	48.57	12.7, 12.7
30	112.8	112.4	112.5	112.4	112.8	112.4	112.5	112.4	20- 30	54.64	103.2	27.1, 27.1
40	97.87	97.61	97.87	97.61	97.87	97.61	97.87	97.61	30- 40	66.03	169.2	44.4, 44.4
50	79.65	79.62	79.96	79.62	79.65	79.62	79.96	79.62	40- 50	68.69	237.9	62.4, 62.4
60	58.88	58.95	59.35	58.95	58.88	58.95	59.35	58.95	50- 60	62.23	300.2	78.7, 78.7
70	36.11	36.50	36.83	36.50	36.11	36.50	36.83	36.50	60- 70	47.34	347.5	91.1, 91.1
80	14.61	14.65	14.70	14.65	14.61	14.65	14.70	14.65	70- 80	26.72	374.2	98.1, 98.1
90	0	0	0	0	0	0	0	0	80- 90	7.180	381.4	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	381.4	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	381.4	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	381.4	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	381.4	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	381.4	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	381.4	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	381.4	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	381.4	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	381.4	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-12-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

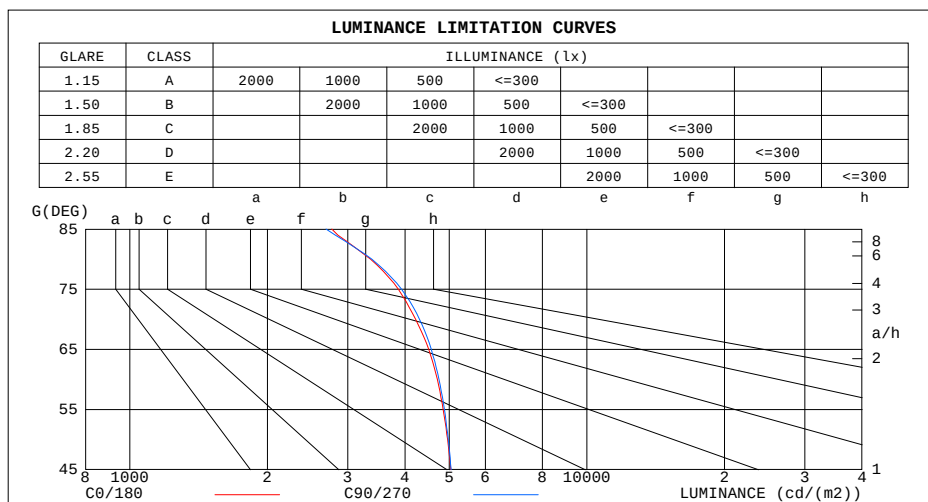

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2767	2688
80	3366	3387
75	3870	3933
70	4223	4307
65	4507	4566
60	4710	4748
55	4849	4879
50	4957	4976
45	5042	5050


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.90	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

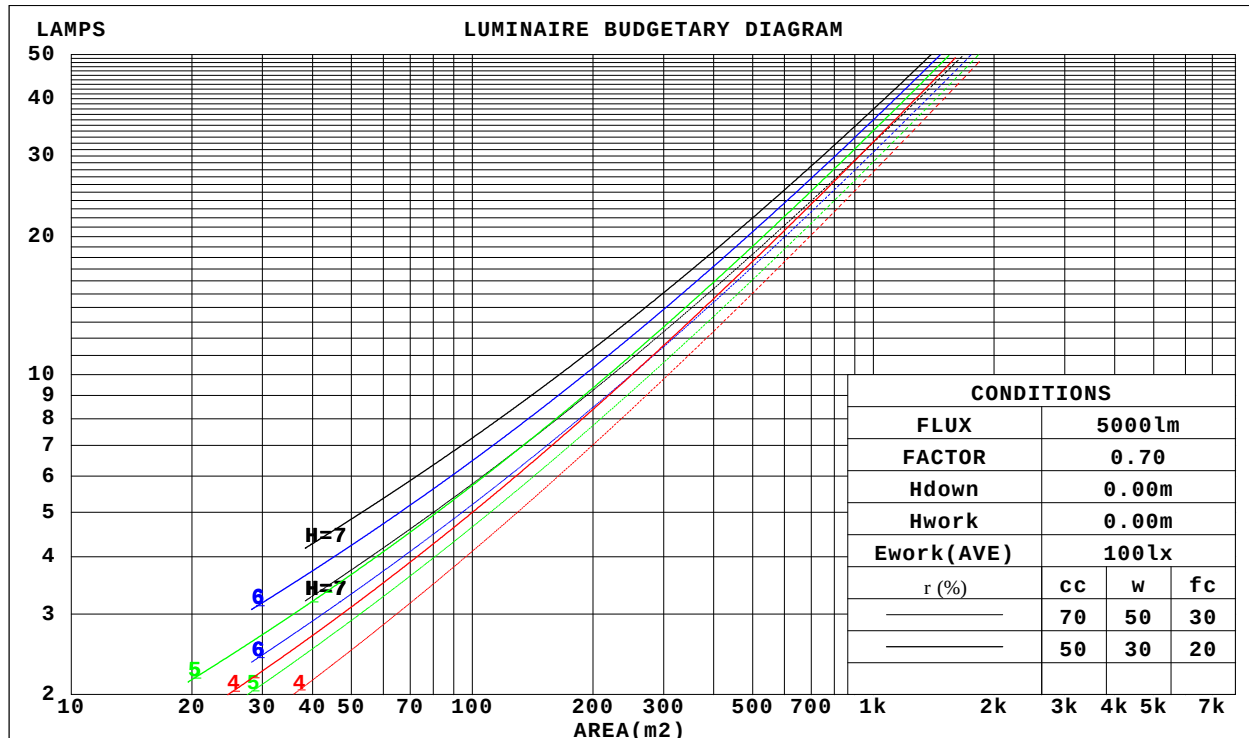

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-12-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:



WEC AND CCEC

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm					
NAME:VUTH20NK271000			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:1000*25mm		Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.310	.176	.056	.303	.173	.055	.290	.166	.053	.278	.160	.051	.266	.154	.050	
2.0	.292	.160	.049	.286	.158	.049	.274	.153	.047	.263	.148	.046	.253	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.255	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.226	.116	.034	.218	.114	.033	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.098	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.174	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r _{CC}	80%			70%			50%			30%			10%			0
r _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm											
NAME:VUTH20NK271000					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:1000*25mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	2H	21.7	23.2	22.0	23.5	23.7	21.8	23.3	22.0	23.5	23.7
	3H	23.2	24.6	23.5	24.9	25.1	23.3	24.7	23.6	24.9	25.2
	4H	23.8	25.1	24.1	25.4	25.6	23.9	25.2	24.2	25.4	25.7
	6H	24.2	25.5	24.5	25.7	26.0	24.3	25.5	24.6	25.8	26.1
	8H	24.3	25.5	24.6	25.8	26.1	24.4	25.6	24.7	25.9	26.2
	12H	24.4	25.5	24.7	25.8	26.1	24.4	25.6	24.8	25.9	26.2
4H	2H	22.3	23.7	22.7	23.9	24.2	22.4	23.7	22.7	24.0	24.2
	3H	24.0	25.2	24.4	25.5	25.8	24.1	25.2	24.4	25.5	25.8
	4H	24.7	25.8	25.1	26.1	26.4	24.8	25.8	25.1	26.2	26.5
	6H	25.2	26.2	25.6	26.5	26.9	25.3	26.2	25.7	26.6	26.9
	8H	25.4	26.3	25.8	26.6	27.0	25.4	26.3	25.8	26.7	27.1
	12H	25.5	26.3	25.9	26.7	27.1	25.5	26.3	26.0	26.7	27.1
8H	4H	25.0	25.9	25.4	26.2	26.6	25.0	25.9	25.4	26.3	26.7
	6H	25.6	26.4	26.1	26.8	27.2	25.7	26.4	26.1	26.8	27.2
	8H	25.9	26.5	26.3	26.9	27.4	25.9	26.5	26.4	27.0	27.4
	12H	26.0	26.6	26.5	27.0	27.5	26.1	26.6	26.5	27.1	27.5
12H	4H	25.0	25.8	25.4	26.2	26.6	25.0	25.8	25.4	26.2	26.6
	6H	25.7	26.3	26.1	26.7	27.2	25.7	26.4	26.2	26.8	27.2
	8H	25.9	26.5	26.4	26.9	27.4	26.0	26.5	26.5	27.0	27.5
Variations with the observer position at spacings:											
S = 1.0H		+ 0.2 / - 0.2				+ 0.2 / - 0.2					
1.5H		+ 0.2 / - 0.3				+ 0.2 / - 0.3					
2.0H		+ 0.2 / - 0.3				+ 0.2 / - 0.3					

CIE Pub.117, 381.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.3)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	49
1.25	83	72	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	69	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

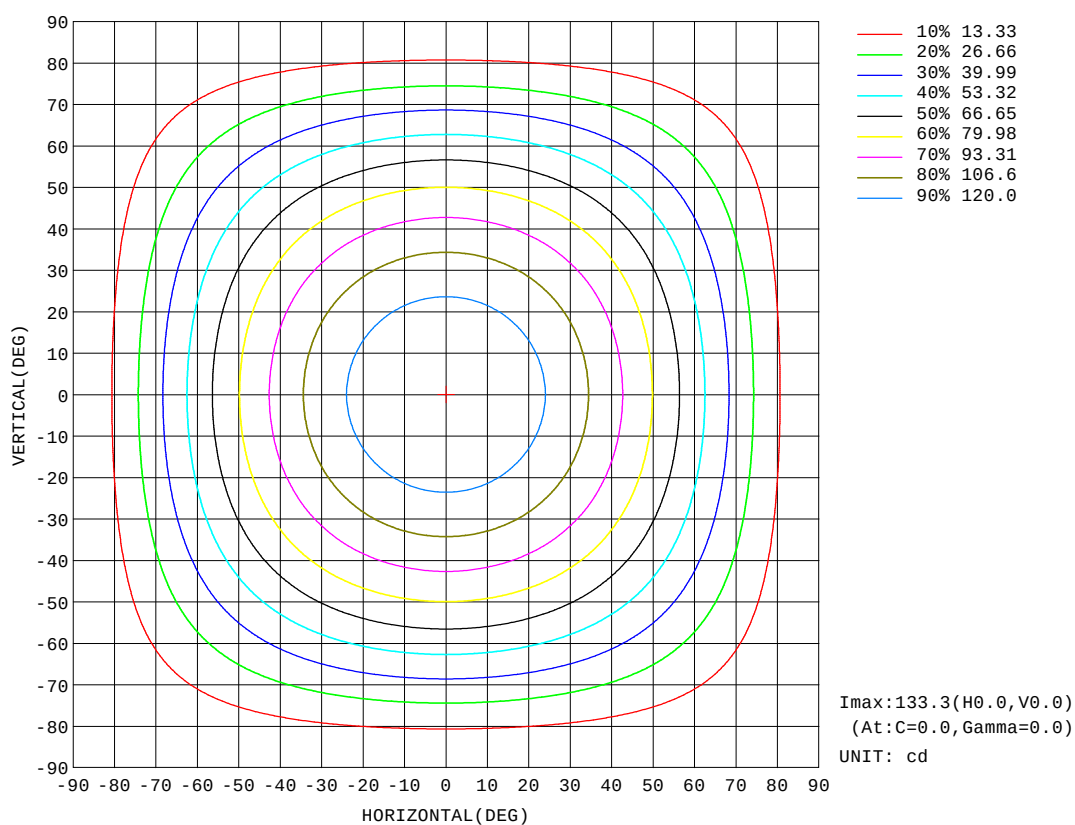


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

Flux out:282.7 lm

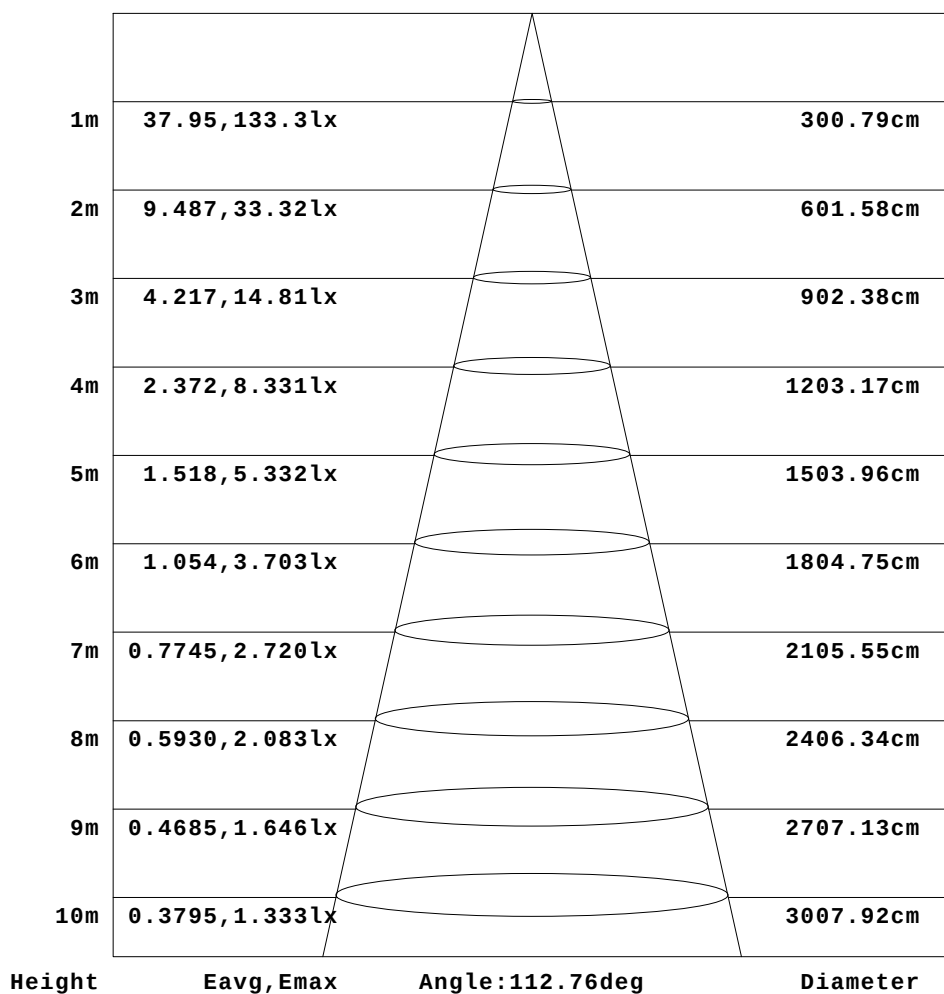


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

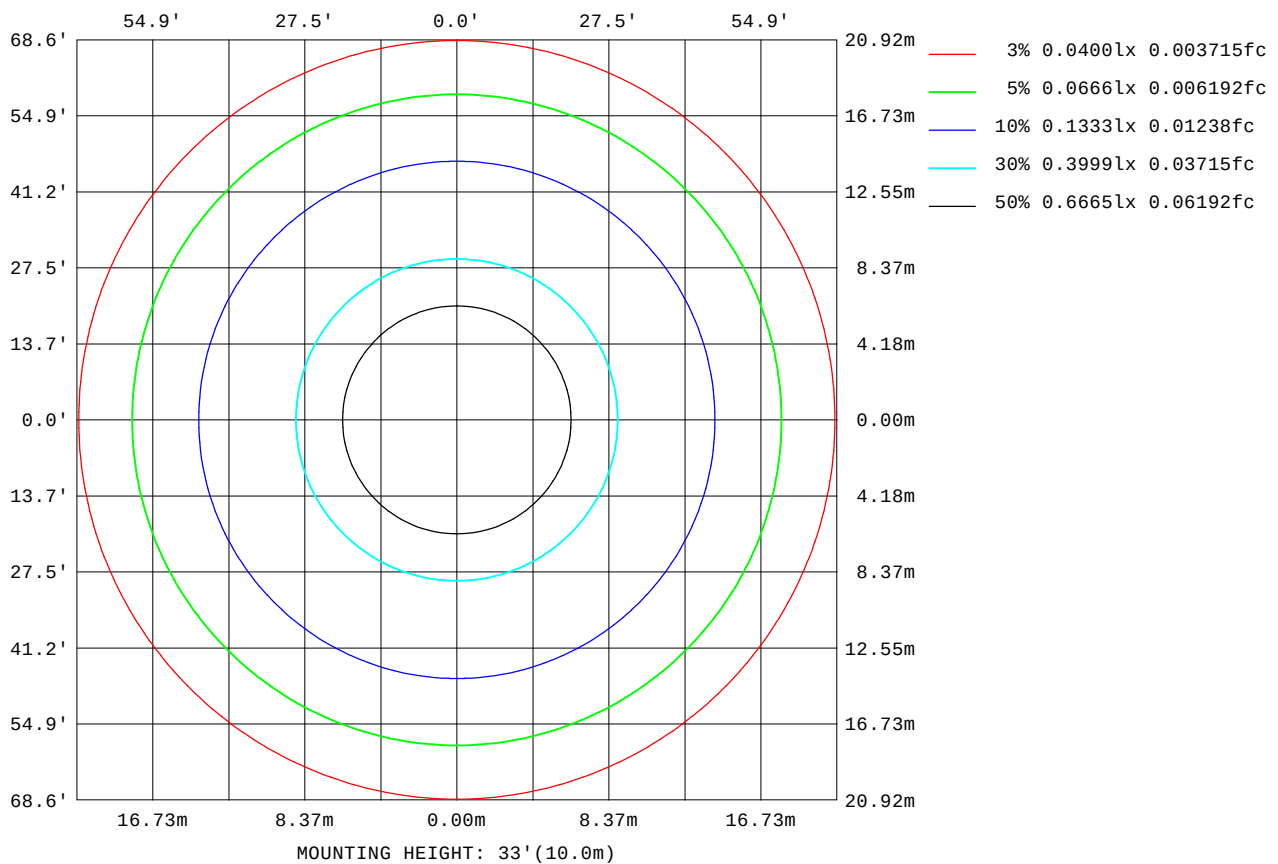

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2022-12-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4507
L_0~180(75)av	3870
L_0~180(85)av	2767
L_90~270(65)av	4566
L_90~270(75)av	3933
L_90~270(85)av	2688
L_45(65)av	4529
L_45(75)av	3899
L_45(85)av	2775

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

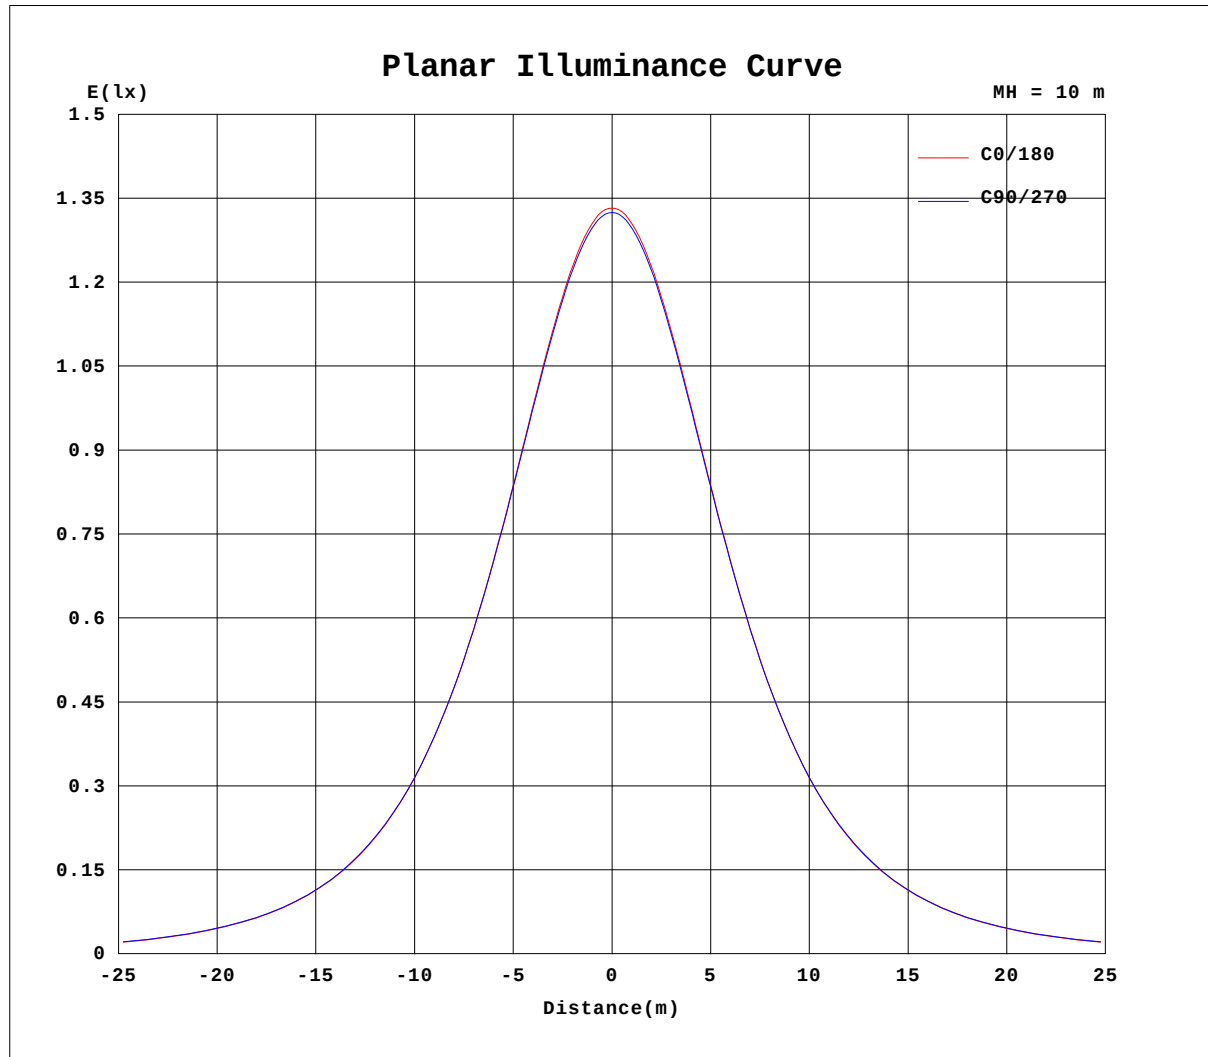

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: JYH
Test Date: 2022-12-16

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 10.950m [K=1.0000]
Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.1910A P:9.100W PF:1.000 Freq:0Hz Lamp Flux:381.396x1 lm		
NAME:VUTH20NK271000	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:1000*25mm	Shielding Angle:

Table--1

UNIT: cd

C(DEC) g (DEC)	0	45	90	135	180	225	270	315										
0	133	133	132	133	133	133	132	133										
5	133	132	132	132	133	132	132	132										
10	131	130	130	130	131	130	130	130										
15	128	127	127	127	128	127	127	127										
20	124	123	123	123	124	123	123	123										
25	119	118	118	118	119	118	118	118										
30	113	112	112	112	113	112	112	112										
35	106	105	106	105	106	105	106	105										
40	97.9	97.6	97.9	97.6	97.9	97.6	97.9	97.6										
45	89.1	88.9	89.3	88.9	89.1	88.9	89.3	88.9										
50	79.7	79.6	80.0	79.6	79.7	79.6	80.0	79.6										
55	69.5	69.6	70.0	69.6	69.5	69.6	70.0	69.6										
60	58.9	58.9	59.4	58.9	58.9	58.9	59.4	58.9										
65	47.6	47.8	48.2	47.8	47.6	47.8	48.2	47.8										
70	36.1	36.5	36.8	36.5	36.1	36.5	36.8	36.5										
75	25.0	25.2	25.5	25.2	25.0	25.2	25.5	25.2										
80	14.6	14.6	14.7	14.6	14.6	14.6	14.7	14.6										
85	6.03	6.05	5.86	6.05	6.03	6.05	5.86	6.05										
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-12-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: